
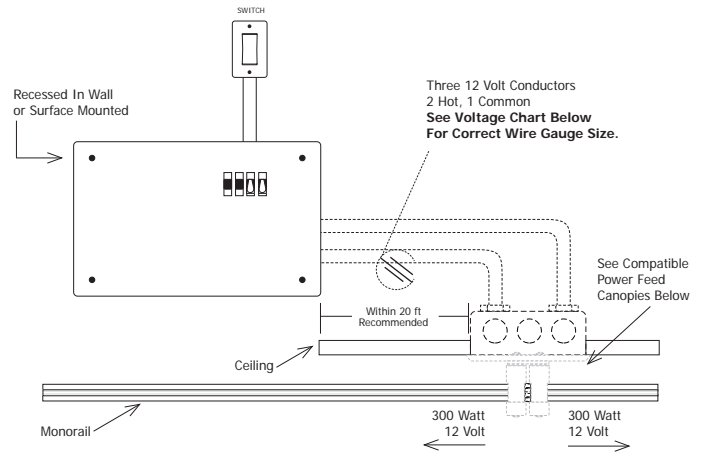


TR-600-D12

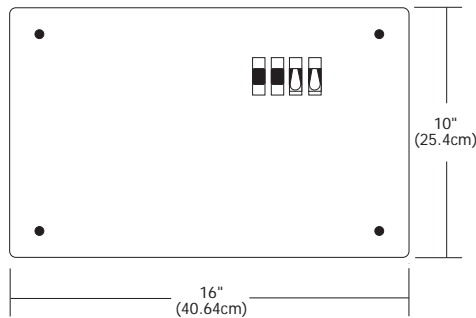

LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

12 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
300 Watt	#10 GA	#6 GA	#4 GA	#1 GA

Dual-Feed Remote Recessed Transformer 600W 12V Magnetic

Remote recessed dual feed 600 watt magnetic transformer converts line voltage to 2X300 watt 12 volt outputs. Not separately switchable or dimmable. Fast acting circuit breakers on the 12 volt side will shut the system off in case of overload or short and can easily be reset. Can be recessed in the wall or surface mounted. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimmable:

With 1000 watt low voltage magnetic dimmer

Mounting Requirements:

Must be in accessible location

Weight:

25 lb (11.34 kg)

Ordering Code

TR	-	600	-	D12	-	Standard 120V (leave blank)
TR Transformer Recessed		600 600 Watts		D12 Dual 12 Volt		2 230V 50Hz 3 277V 60Hz P Plug-In

Compatible Power Feed Canopies

	MPD - 4RD - 1 - SN
MPD Monorail Power Dual Feed	4" Round Canopy
	1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)
	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MPD - 4RD - A - SN
MPD Monorail Power Dual Feed	4" Round Canopy
	A 12' (3.7m) Adjustable Cable
	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MPD - 2SQ - 1 - SN
MPD Monorail Power Dual Feed	2" Square Canopy J-Box Included
	1 1" (2.5cm)
	SN Satin Nickel PN Polished Nickel BZ Antique Bronze

PROJECT:

FIXTURE
TYPE:

DATE: