



**Monorail Surface Mount Kit with 600W 24V magnetic transformer includes everything you need for a complete system—just add fixtures.** Kit includes surface mount magnetic 600 watt 24 volt transformer, Monorail, appropriate quantities of 1" standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

## Length:

4, 8, 12, 16, 20, 24, 28 or 32 feet  
1.2, 2.4, 3.7, 4.9, 6.1, 7.3, 8.5 or 9.8 meters

## Dimming:

With 1000 watt low voltage magnetic dimmer

## Standard Mounting:

Rail mounts 1" (2.5cm) from ceiling. For 6"- 96" (15.2cm-243.8cm) power and standoff lengths, see below.

## Transformer:


Maximum 600 watt 24 volt load; 24 volt lamps must be used.

## Finish:

Satin Nickel, Polished Nickel or Antique Bronze


## Weight:

23 - 28 lb (10.4 - 12.6 kg)

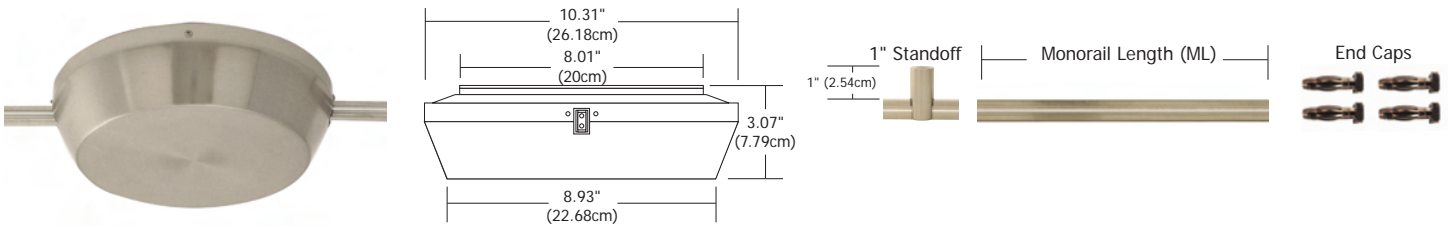

Transformer Type	Wattage	Voltage Output	Monorail Length (ML)	Finish	Voltage Input
<b>MT</b>	<b>600</b>	<b>24</b>	<b>K4</b>	<b>SN</b>	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 600 Watt	24 24 Volt Single Feed	<b>K4</b> Kit with 4' (1.2m) Monorail <b>K2x4</b> Kit with two 4' (2.4m) Monorail <b>K8</b> Kit with 8' (2.4m) Monorail <b>K12</b> Kit with 12' (3.7m) Monorail <b>K16</b> Kit with 16' (4.9m) Monorail <b>K20</b> Kit with 20' (6.1m) Monorail <b>K24</b> Kit with 24' (7.3m) Monorail <b>K28</b> Kit with 28' (8.5m) Monorail <b>K32</b> Kit with 32' (9.8m) Monorail	<b>SN</b> Satin Nickel <b>PN</b> Polished Nickel <b>BZ</b> Antique Bronze	2 230 Volt

**Monorail Surface Mount Kit-Dropped with 600W 24V surface mount magnetic transformer includes everything you need for a complete system — just add fixtures.** Kit includes surface mount magnetic 600 watt 24 volt transformer, Monorail, appropriate quantities of standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

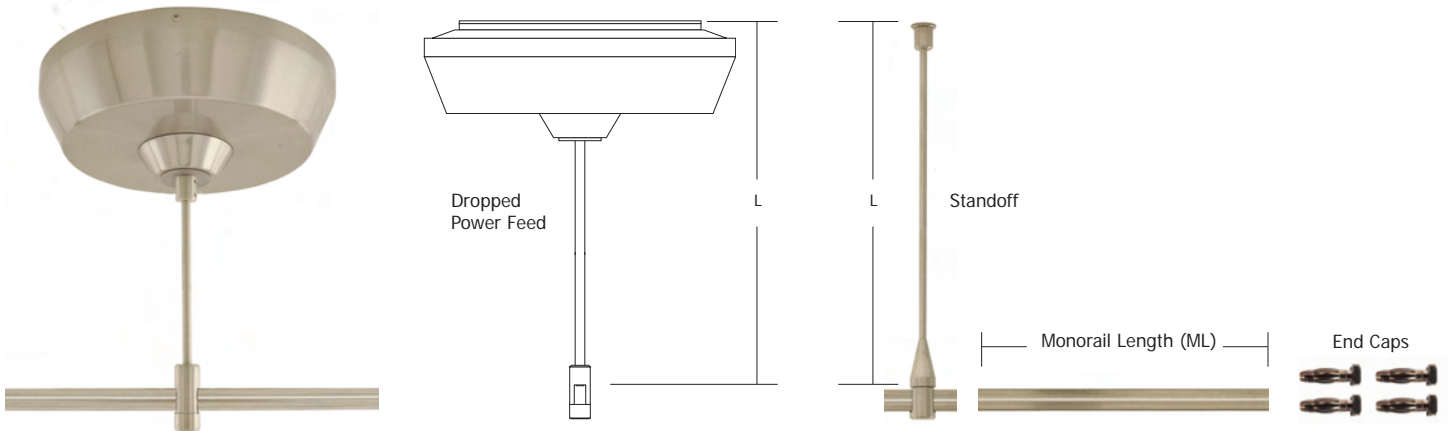

Transformer Type	Wattage	Voltage Output	Power/Standoff Length (L)	Monorail Length (ML)	Finish	Voltage Input
<b>MT</b>	<b>600</b>	<b>24</b>	<b>P6</b>	<b>K8</b>	<b>SN</b>	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 600 Watt	24 24 Volt Single Feed	<b>P6</b> 6" (15.2cm) <b>P12</b> 12" (30.5cm) <b>P24</b> 24" (61cm) <b>P36</b> 36" (91.4cm) <b>P48</b> 48" (122cm) <b>P96</b> 96" (243.8cm) <b>P_</b> Custom Length Available	<b>K8</b> Kit with 8' (2.4m) Monorail <b>K12</b> Kit with 12' (3.7m) Monorail <b>K16</b> Kit with 16' (4.9m) Monorail <b>K20</b> Kit with 20' (6.1m) Monorail <b>K24</b> Kit with 24' (7.3m) Monorail <b>K28</b> Kit with 28' (8.5m) Monorail <b>K32</b> Kit with 32' (9.8m) Monorail	<b>SN</b> Satin Nickel <b>PN</b> Polished Nickel <b>BZ</b> Antique Bronze	2 230 Volt

PROJECT:

FIXTURE  
TYPE:

DATE: