

MONORAIL KITS - SURFACE MOUNT TRANSFORMERS

MONORAIL 12V
DUAL FEED
MAGNETIC 600W



Patent Pending

Monorail Surface Mount Kit with 600W 12V Dual Feed magnetic transformer includes everything you need for a complete system — just add fixtures. Kit includes surface mount magnetic 600 watt 12 volt dual feed transformer, Monorail, appropriate quantities of 1" standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

Length:

4, 8, 12, 16, 20, 24, 28 or 32 feet
1.2, 2.4, 3.7, 4.9, 6.1, 7.3, 8.5 or 9.8 meters

Dimming:

With 1000 watt low voltage magnetic dimmer

Standard Mounting:

Rail mounts 1" (2.5cm) from ceiling. For 6"- 96" (15.2cm-243.8cm) power and standoff lengths, see below.

Transformer:


Maximum 300 watt load per feed for 12 volt dual feed system.

Finish:

Satin Nickel, Polished Nickel or Antique Bronze


Weight:

23 - 28 lb (10.4 - 12.6 kg)

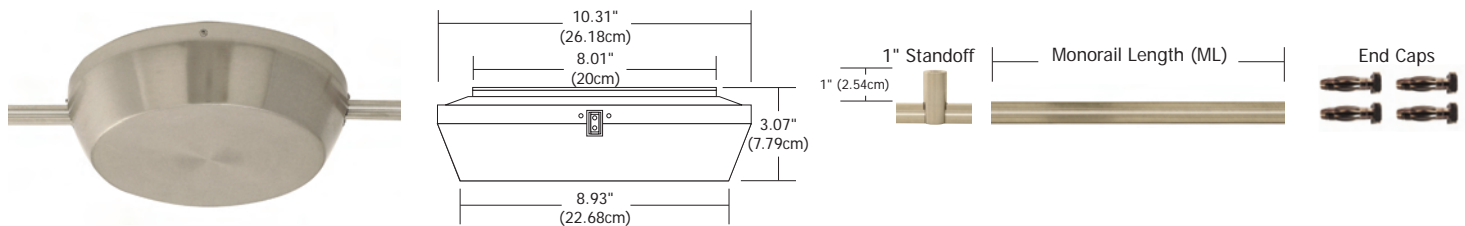

Transformer Type	Wattage	Voltage Output	Monorail Length (ML)	Finish	Voltage Input
MT	600	D12	K4	SN	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 600 Watt	D12 12 Volt Dual Feed	K4 Kit with 4' (1.2m) Monorail K2x4 Kit with two 4' (2.4m) Monorail K8 Kit with 8' (2.4m) Monorail K12 Kit with 12' (3.7m) Monorail K16 Kit with 16' (4.9m) Monorail K20 Kit with 20' (6.1m) Monorail K24 Kit with 24' (7.3m) Monorail K28 Kit with 28' (8.5m) Monorail K32 Kit with 32' (9.8m) Monorail	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

Monorail Surface Mount Kit-Dropped with 600W 12V Dual Feed surface mount magnetic transformer includes everything you need for a complete system — just add fixtures. Kit includes surface mount magnetic 600 watt 12 volt transformer, Monorail, appropriate quantities of standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

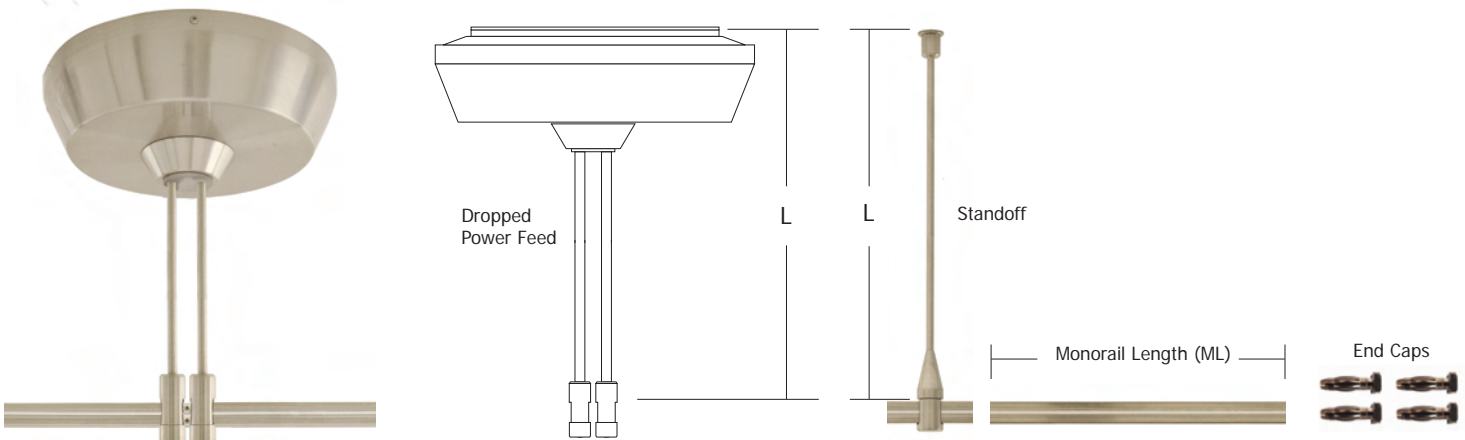

Transformer Type	Wattage	Voltage Output	Power/Standoff Length (L)	Monorail Length (ML)	Finish	Voltage Input
MT	600	D12	P6	K8	SN	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 600 Watt	D12 12 Volt Dual Feed	P6 6" (15.2cm) P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length Available	K8 Kit with 8' (2.4m) Monorail K12 Kit with 12' (3.7m) Monorail K16 Kit with 16' (4.9m) Monorail K20 Kit with 20' (6.1m) Monorail K24 Kit with 24' (7.3m) Monorail K28 Kit with 28' (8.5m) Monorail K32 Kit with 32' (9.8m) Monorail	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

PROJECT:

FIXTURE
TYPE:

DATE: