

Monorail Remote Mount Kit with 300W 24V magnetic transformer includes everything you need for a complete system—just add fixtures. Kit includes remote mount magnetic 300 watt 24 volt single feed transformer and power canopy, Monorail, appropriate quantities of 1" standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 24 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

Length:

4, 8, 12, 16, 20, 24, 28 or 32 feet
1.2, 2.4, 3.7, 4.9, 6.1, 7.3, 8.5 or 9.8 meters

Dimming:

With 600 watt low voltage magnetic dimmer

Standard Mounting:

Rail mounts 1" (2.5cm) from ceiling. For 6" - 96" (15.2cm-243.8cm) power and standoff lengths, see below.

Transformer:


Maximum 300 watt, 24 volt load; 24 volt lamps must be used

Finish:

Satin Nickel, Polished Nickel or Antique Bronze


Weight:

15 - 20 lb (6.8 - 9 kg)

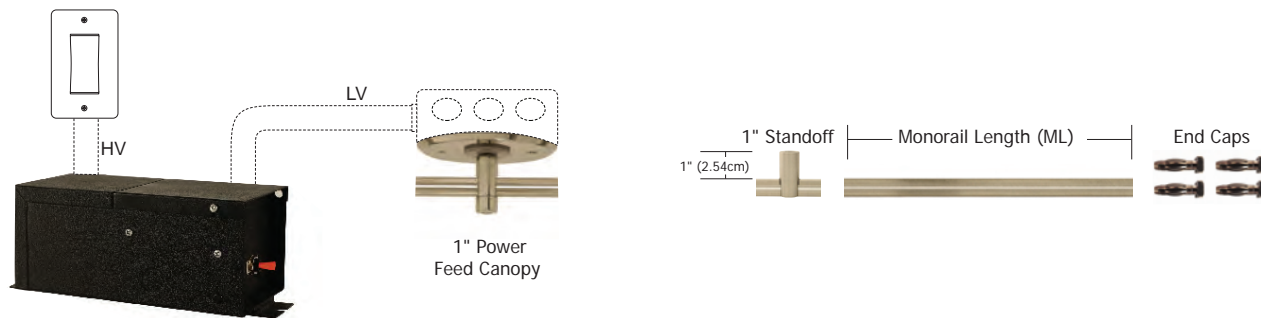

Transformer Type	Wattage	Voltage Output	Monorail Length (ML)	Finish	Voltage Input
T	300	24	K4	SN	Standard 120 Volt (leave blank)
T Remote Mount Magnetic Transformer	300 300 Watt	24 24 Volt Single Feed	K4 Kit with 4' (1.2m) Monorail K2x4 Kit with two 4' (2.4m) Monorail K8 Kit with 8' (2.4m) Monorail K12 Kit with 12' (3.7m) Monorail K16 Kit with 16' (4.9m) Monorail K20 Kit with 20' (6.1m) Monorail K24 Kit with 24' (7.3m) Monorail K28 Kit with 28' (8.5m) Monorail K32 Kit with 32' (9.8m) Monorail	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt 3 277 Volt P Plug

Monorail Remote Kit-Dropped with 300W 24V magnetic transformer includes everything you need for a complete system — just add fixtures. Kit includes remote mount magnetic 300 watt 24 volt single feed transformer and power canopy, Monorail, appropriate quantities of standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 24 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

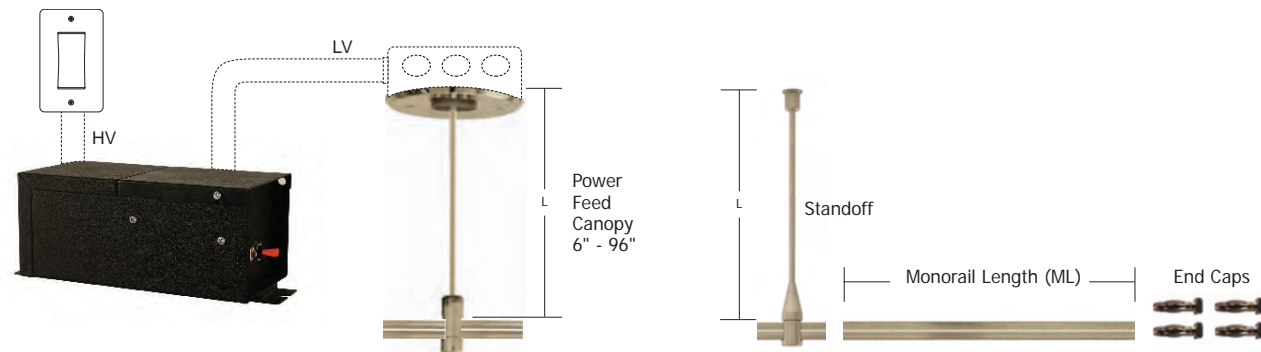

Transformer Type	Wattage	Voltage Output	Power/Standoff Length (L)	Monorail Length (ML)	Finish	Voltage Input
T	300	24	P6	K8	SN	Standard 120 Volt (leave blank)
T Remote Mount Magnetic Transformer	300 300 Watt	24 24 Volt Single Feed	P6 6" (15.2cm) P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length Available	K8 Kit with 8' (2.4m) Monorail K12 Kit with 12' (3.7m) Monorail K16 Kit with 16' (4.9m) Monorail K20 Kit with 20' (6.1m) Monorail K24 Kit with 24' (7.3m) Monorail K28 Kit with 28' (8.5m) Monorail K32 Kit with 32' (9.8m) Monorail	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt 3 277 Volt P Plug

PROJECT:

FIXTURE
TYPE:

DATE: