


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 78.46 lm/W
MODEL	3000K 24V	I _{max} (cd)	349.0	S/MH(C0/180)	1.28	
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	1.27	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1314.5	□ UP,DN(C0-180)	3.9,50.9	
NOMINAL FLUX(lm)	1314.49	CIE CLASS	DIRECT	□ UP,DN(C180-360)	1.1,44.1	
LAMPS INSIDE	1	□ up (%)	5.0	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	□ down (%)	95.0	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

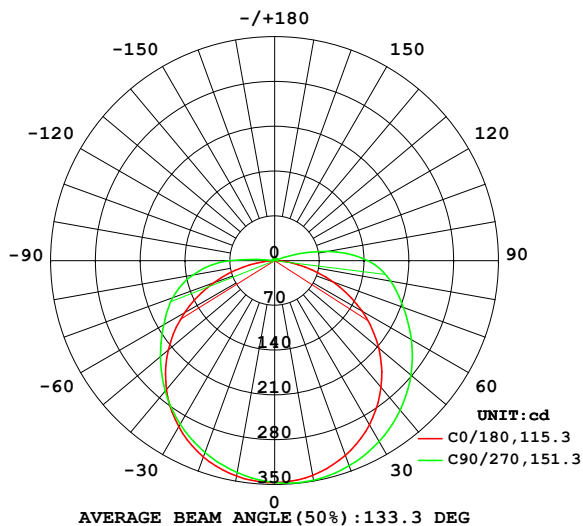

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

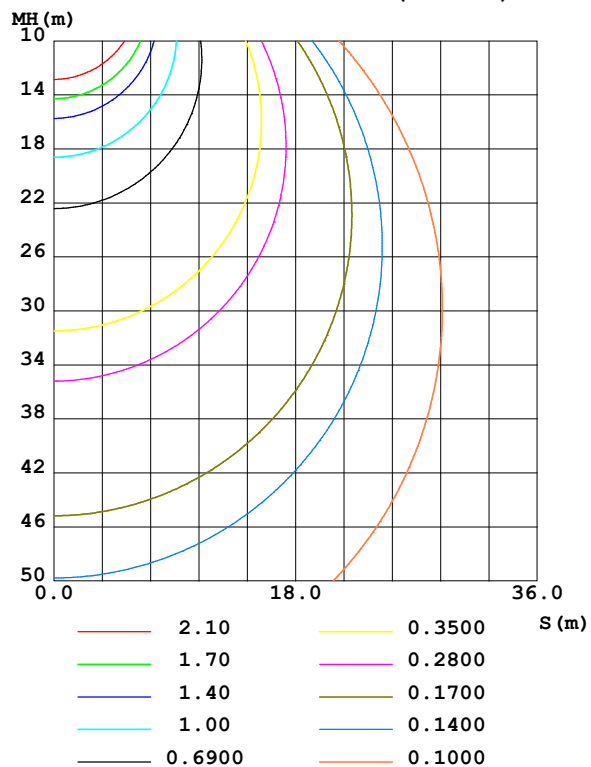

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-05

□ Range: 0 - 180DEG
 □ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	340.7	345.5	348.4	346.9	342.0	338.3	336.4	336.9	0- 10	32.87	32.87	2.5,2.5
20	323.7	334.2	341.1	337.0	326.3	320.7	319.1	318.3	10- 20	94.87	127.7	9.72,9.72
30	296.3	313.7	326.7	317.7	299.9	294.8	295.3	291.6	20- 30	146.3	274.0	20.8,20.8
40	258.8	285.5	305.4	290.9	263.2	261.4	266.0	257.7	30- 40	181.6	455.6	34.7,34.7
50	212.2	250.4	278.1	256.8	217.1	222.0	233.2	218.2	40- 50	197.3	652.8	49.7,49.7
60	157.7	210.3	246.7	217.5	162.4	179.4	200.1	176.4	50- 60	192.7	845.5	64.3,64.3
70	97.22	168.8	214.3	176.4	101.2	139.4	169.5	138.1	60- 70	170.8	1016	77.3,77.3
80	37.66	132.4	184.1	139.9	39.77	100.0	129.8	99.05	70- 80	137.2	1153	87.7,87.7
90	0.8596	92.11	145.6	98.87	1.344	46.32	70.02	44.06	80- 90	94.99	1248	95,95
100	1.095	33.63	83.85	39.61	0.9230	2.149	3.952	2.118	90-100	41.54	1290	98.1,98.1
110	1.761	2.222	15.19	2.195	1.496	2.133	2.704	2.289	100-110	11.34	1301	99,99
120	2.420	2.593	2.685	2.484	2.109	2.523	2.949	2.703	110-120	2.550	1304	99.2,99.2
130	2.995	2.976	3.039	2.912	2.680	2.901	3.210	3.089	120-130	2.474	1306	99.4,99.4
140	3.464	3.390	3.357	3.319	3.177	3.267	3.441	3.462	130-140	2.452	1309	99.6,99.6
150	3.870	3.804	3.702	3.697	3.619	3.614	3.688	3.826	140-150	2.225	1311	99.7,99.7
160	4.258	4.175	4.113	4.061	4.071	3.990	4.061	4.186	150-160	1.810	1313	99.9,99.9
170	4.655	4.555	4.510	4.482	4.544	4.447	4.458	4.574	160-170	1.218	1314	100,100
180	4.957	4.869	4.864	4.937	4.952	4.872	4.866	4.930	170-180	0.4457	1314	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 573.36 lm

%lum = 43.6%

%lamp = 43.6%

Conical surface Flux(120deg): 845.48 lm

%lum = 64.3%


%lamp = 64.3%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

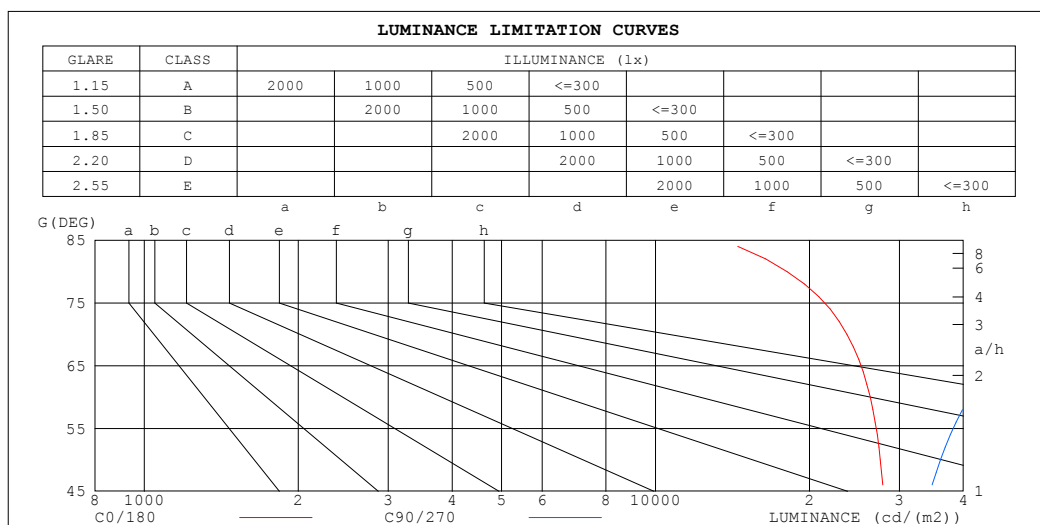

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	17379	163147
80	18078	88433
75	23410	65124
70	23692	52258
65	26438	46102
60	26296	41155
55	27816	38668
50	27522	36085
45	28436	34799


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 5.749m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0														
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
□fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.08	1.08	1.08	1.03	1.03	1.03	.97	.97	.97	.95														
1.0	.99	.93	.88	.96	.91	.86	.90	.86	.83	.86	.82	.79	.81	.78	.76	.73														
2.0	.84	.76	.70	.82	.75	.68	.77	.71	.66	.73	.68	.64	.70	.65	.62	.59														
3.0	.73	.64	.57	.71	.63	.56	.67	.60	.54	.64	.58	.53	.61	.55	.51	.48														
4.0	.64	.55	.47	.63	.54	.47	.59	.52	.45	.56	.50	.44	.54	.48	.43	.41														
5.0	.57	.47	.40	.56	.47	.40	.53	.45	.39	.50	.43	.38	.48	.42	.37	.35														
6.0	.51	.42	.35	.50	.41	.34	.48	.40	.34	.45	.38	.33	.43	.37	.32	.30														
7.0	.46	.37	.31	.45	.36	.30	.43	.35	.30	.41	.34	.29	.39	.33	.28	.26														
8.0	.42	.33	.27	.41	.33	.27	.39	.32	.26	.38	.31	.26	.36	.30	.25	.23														
9.0	.39	.30	.24	.38	.30	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.21														
10.0	.36	.27	.22	.35	.27	.22	.33	.26	.21	.32	.26	.21	.31	.25	.21	.19														

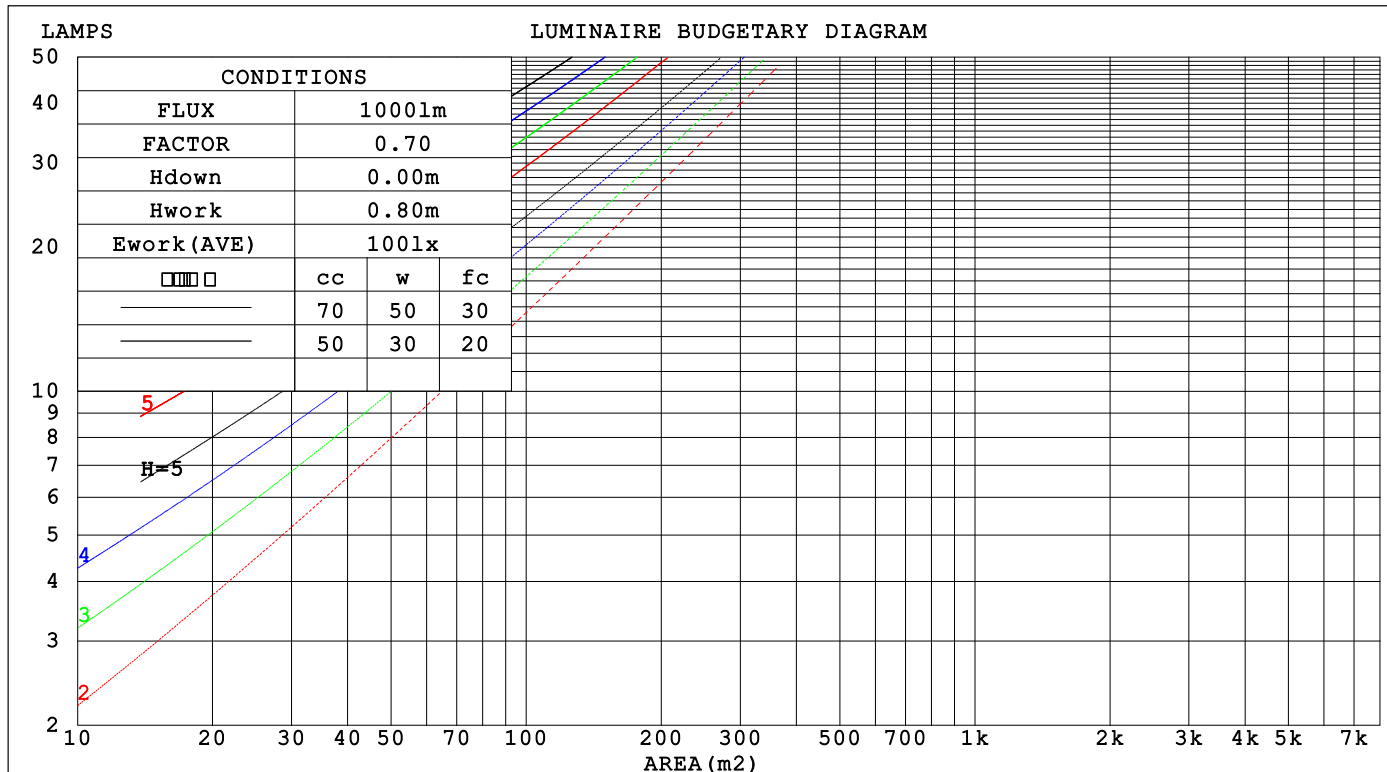

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.387 .220 .070	.378 .216 .069	.362 .208 .066	.347 .200 .064	.333 .193 .062	
2.0	.338 .185 .057	.330 .182 .056	.316 .175 .055	.302 .169 .053	.289 .164 .052	
3.0	.301 .160 .048	.294 .158 .047	.281 .152 .046	.269 .147 .045	.258 .143 .044	
4.0	.272 .141 .042	.266 .139 .041	.254 .135 .040	.243 .130 .039	.233 .126 .038	
5.0	.247 .126 .036	.242 .124 .036	.231 .120 .035	.221 .117 .035	.212 .113 .034	
6.0	.227 .114 .033	.222 .112 .032	.212 .109 .032	.203 .106 .031	.195 .103 .030	
7.0	.209 .103 .029	.204 .102 .029	.196 .099 .029	.188 .096 .028	.180 .094 .028	
8.0	.194 .095 .027	.190 .093 .026	.182 .091 .026	.175 .089 .026	.168 .086 .025	
9.0	.181 .087 .024	.177 .086 .024	.170 .084 .024	.163 .082 .023	.157 .080 .023	
10.0	.169 .081 .022	.166 .080 .022	.159 .078 .022	.153 .076 .022	.148 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.229 .229 .229	.196 .196 .196	.133 .133 .133	.077 .077 .077	.025 .025 .025	
1.0	.224 .194 .167	.192 .167 .144	.131 .115 .099	.076 .066 .058	.024 .021 .019	
2.0	.217 .171 .131	.186 .147 .113	.128 .102 .079	.074 .059 .046	.024 .019 .015	
3.0	.210 .154 .109	.180 .132 .094	.123 .092 .066	.071 .054 .039	.023 .017 .013	
4.0	.202 .141 .094	.173 .122 .082	.119 .085 .058	.069 .050 .034	.022 .016 .011	
5.0	.194 .131 .084	.166 .113 .073	.115 .079 .052	.066 .046 .031	.021 .015 .010	
6.0	.186 .122 .077	.160 .106 .067	.110 .074 .047	.064 .044 .028	.021 .014 .009	
7.0	.179 .116 .071	.154 .100 .062	.106 .070 .044	.062 .041 .026	.020 .014 .009	
8.0	.172 .110 .067	.148 .095 .059	.102 .067 .042	.060 .039 .025	.019 .013 .008	
9.0	.166 .105 .064	.143 .091 .056	.099 .064 .040	.058 .038 .024	.019 .012 .008	
10.0	.160 .101 .062	.138 .087 .054	.095 .062 .038	.056 .036 .023	.018 .012 .008	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: COB					TYPE: COB			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 0.012*1			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.0	24.6	23.4	24.9	25.2	24.8	26.4	25.1	26.7	27.0
	3H	24.6	26.1	25.0	26.4	26.7	27.4	28.9	27.8	29.2	29.6
	4H	25.2	26.6	25.6	27.0	27.3	28.9	30.3	29.3	30.6	31.0
	6H	25.7	27.0	26.1	27.4	27.8	30.5	31.9	31.0	32.2	32.6
	8H	25.8	27.1	26.2	27.5	27.9	31.5	32.7	31.9	33.1	33.5
	12H	25.9	27.1	26.3	27.5	27.9	32.5	33.7	32.9	34.1	34.5
4H	2H	24.1	25.5	24.5	25.9	26.2	25.4	26.8	25.8	27.1	27.5
	3H	26.0	27.2	26.4	27.6	28.0	28.3	29.5	28.7	29.9	30.3
	4H	26.8	27.9	27.2	28.3	28.8	30.0	31.1	30.4	31.5	32.0
	6H	27.4	28.4	27.9	28.9	29.4	31.8	32.9	32.3	33.3	33.8
	8H	27.7	28.6	28.2	29.1	29.6	32.9	33.8	33.4	34.3	34.8
	12H	27.8	28.7	28.3	29.2	29.7	34.1	35.0	34.6	35.4	36.0
8H	4H	27.8	28.8	28.3	29.2	29.7	30.4	31.3	30.8	31.8	32.3
	6H	28.8	29.6	29.4	30.1	30.7	32.5	33.3	33.1	33.8	34.4
	8H	29.3	30.0	29.8	30.5	31.1	33.8	34.5	34.3	35.0	35.6
	12H	29.6	30.3	30.2	30.8	31.4	35.2	35.9	35.8	36.4	37.0
12H	4H	28.1	29.0	28.7	29.5	30.0	30.4	31.3	30.9	31.8	32.3
	6H	29.4	30.1	29.9	30.7	31.2	32.7	33.4	33.2	33.9	34.5
	8H	30.0	30.7	30.6	31.2	31.8	34.0	34.7	34.6	35.2	35.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 1314 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.012 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	52	39	32	51	39	32	50	39	32	25
0.80	61	48	40	60	48	40	58	47	40	32
1.00	69	57	48	68	56	48	65	57	47	40
1.25	76	64	56	74	63	55	71	61	54	46
1.50	81	70	61	79	68	61	76	66	59	51
2.00	88	78	70	86	76	69	82	74	67	58
2.50	93	83	76	90	81	75	86	78	72	62
3.00	96	88	81	94	86	79	89	82	77	67
4.00	101	94	87	98	91	86	93	87	83	72
5.00	104	97	92	101	95	90	95	91	87	75
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

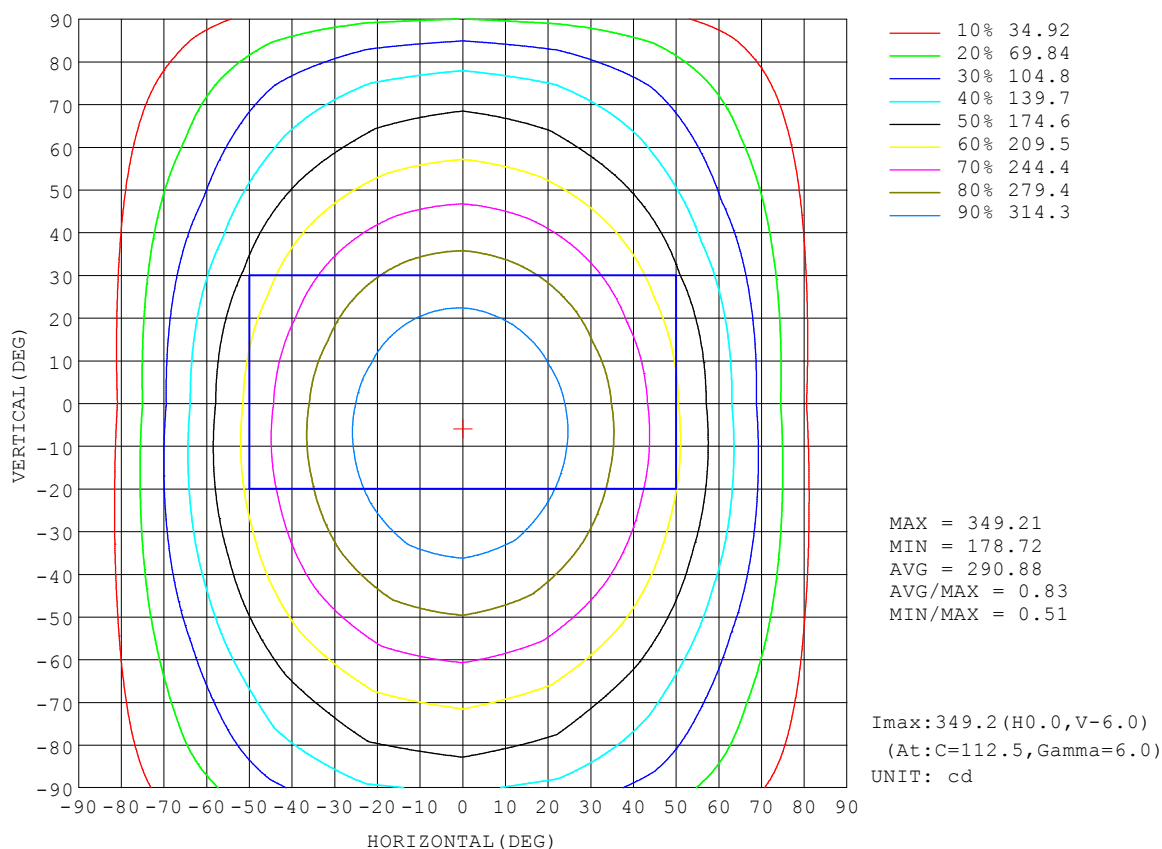


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

AAI Figure

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

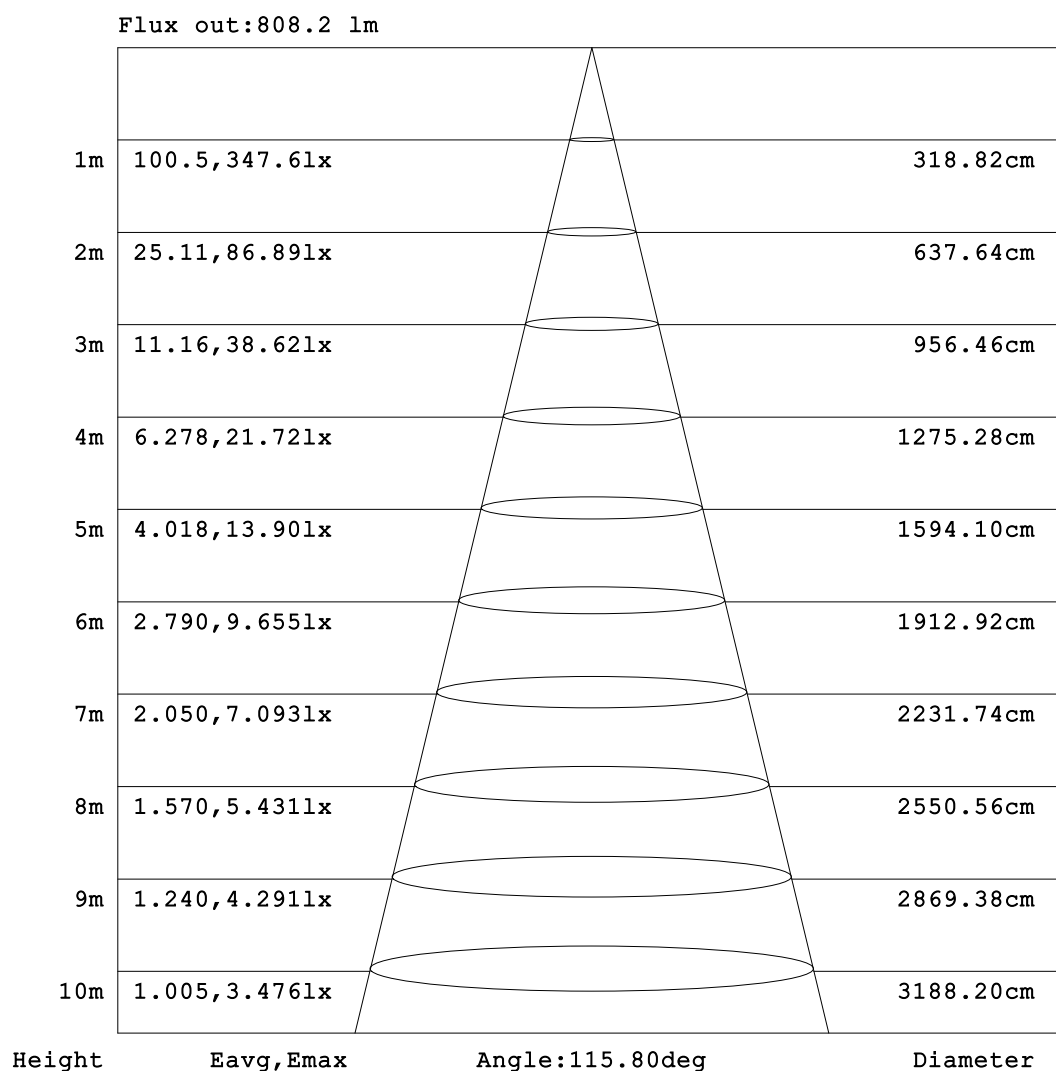


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:5.749m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

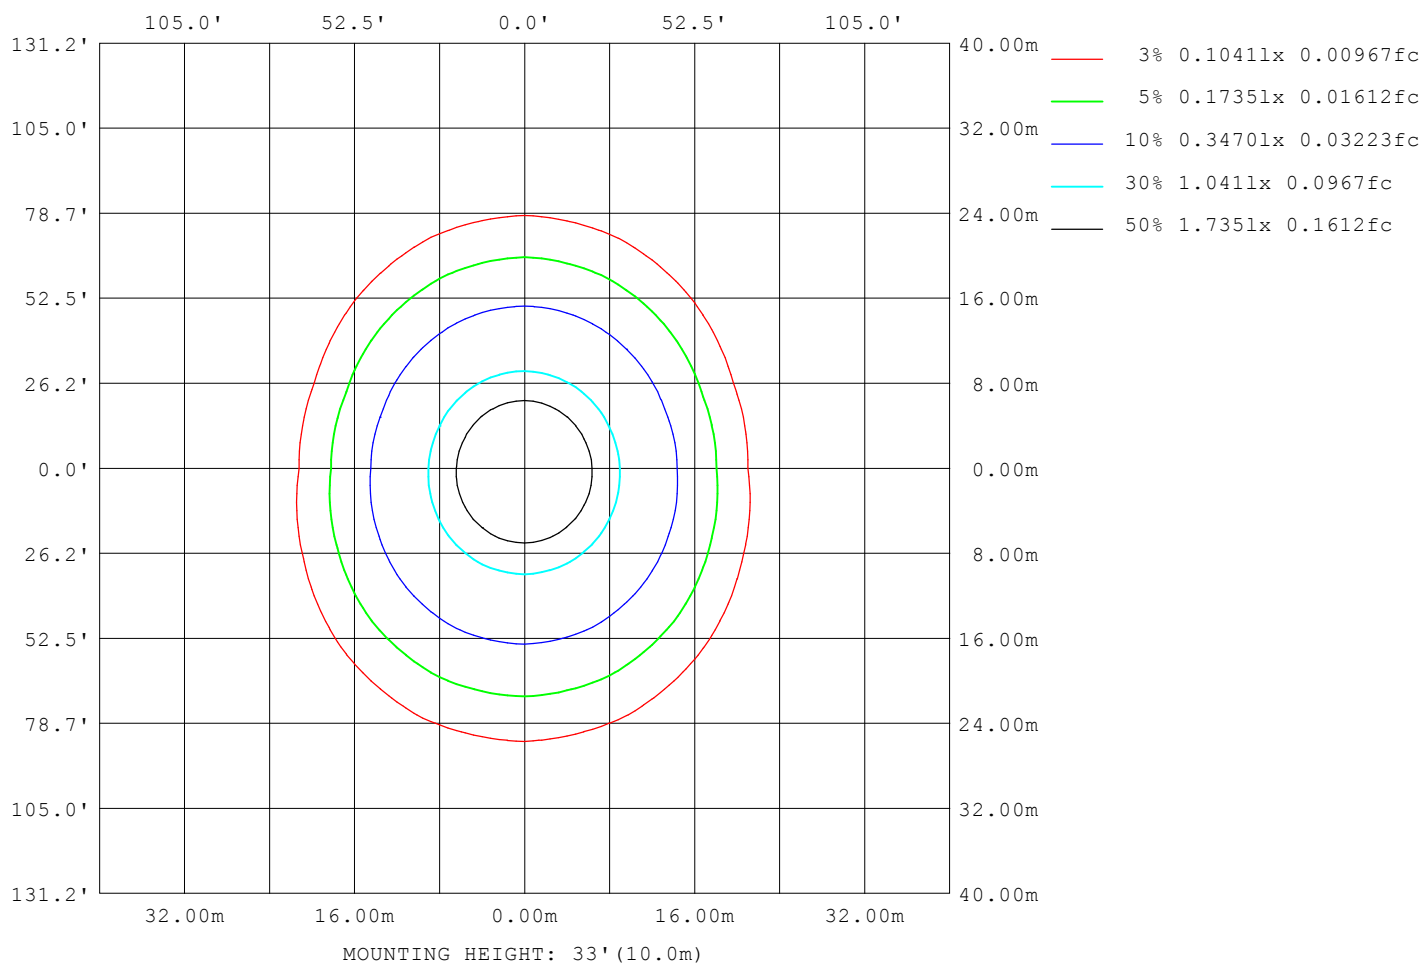

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	25678
L_0~180 (75) av	21958
L_0~180 (85) av	14112
L_90~270 (65) av	40958
L_90~270 (75) av	56481
L_90~270 (85) av	129484
L_45 (65) av	34560
L_45 (75) av	44126
L_45 (85) av	92178

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

Planar Illuminance Curve

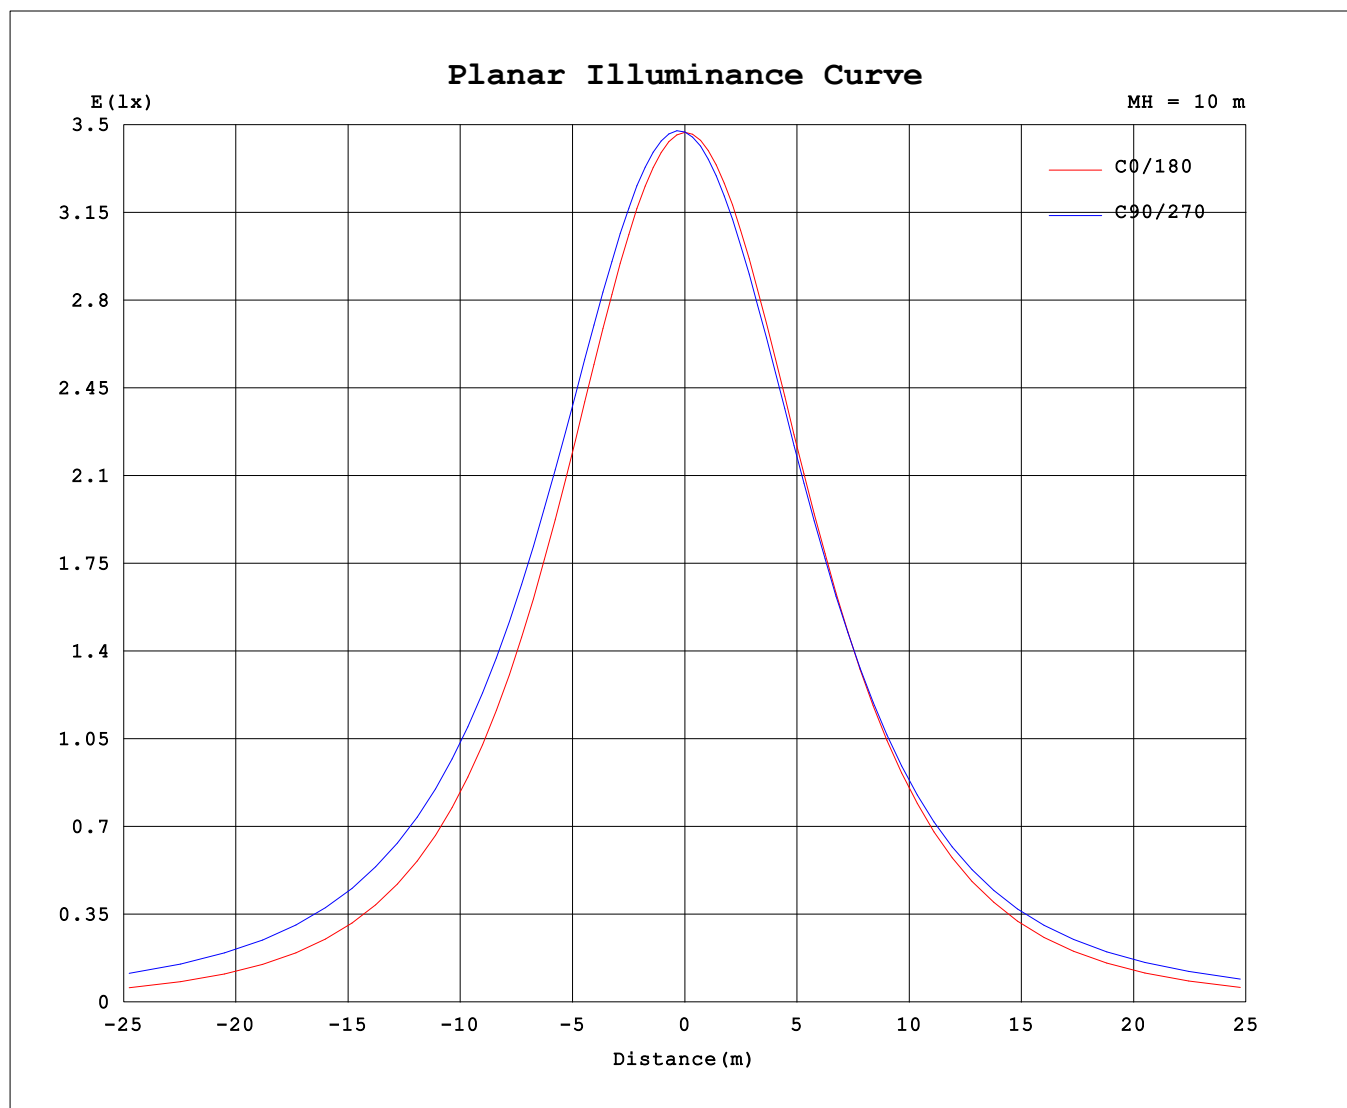

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-11-05

☐ Range: 0 - 180DEG
☐ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 5.749m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: COB	TYPE: COB	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.012*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	347	347	347	347	347	347	347	347	347	347	347	347	347	347	347	347			
5	346	347	348	348	349	349	348	347	346	345	345	344	344	344	344	345			
10	341	343	345	347	348	348	347	345	342	340	338	337	336	336	337	338			
15	335	339	342	345	346	346	344	341	337	334	332	331	330	330	330	332			
20	324	329	334	339	341	341	337	332	326	322	321	320	319	318	318	320			
25	314	320	327	333	336	335	330	324	317	312	311	311	310	309	309	309			
30	296	305	314	323	327	325	318	309	300	295	295	295	295	293	292	291			
35	282	292	303	314	319	317	308	297	286	281	282	284	284	282	279	277			
40	259	270	286	299	305	303	291	276	263	258	261	265	266	263	258	254			
45	241	254	272	288	295	292	278	260	246	241	246	251	253	249	242	237			
50	212	228	250	270	278	274	257	234	217	213	222	230	233	228	218	209			
55	191	210	235	257	266	261	242	216	196	194	205	216	220	214	202	190			
60	158	180	210	236	247	241	218	186	162	163	179	194	200	193	176	159			
65	134	159	194	222	234	227	201	166	139	141	163	181	188	180	160	138			
70	97.2	127	169	201	214	206	176	135	101	109	139	162	169	161	138	108			
75	72.7	107	153	188	202	193	161	114	76.0	89.4	125	147	155	146	124	89.1			
80	37.7	79.1	132	170	184	175	140	84.5	39.8	64.2	100	122	130	121	99.0	65.4			
85	18.2	64.2	118	156	170	161	125	69.8	19.5	47.2	80.5	102	110	101	79.7	48.1			
90	0.86	40.6	92.1	130	146	136	98.9	46.0	1.34	18.6	46.3	63.7	70.0	61.5	44.1	18.6			
95	0.75	21.7	70.8	109	124	114	77.7	26.5	0.65	1.80	10.3	23.2	28.8	20.6	8.56	1.85			
100	1.10	1.94	33.6	69.5	83.8	74.3	39.6	2.26	0.92	1.23	2.15	3.46	3.95	2.99	2.12	1.34			
105	1.35	1.69	11.1	41.4	54.4	45.2	14.5	1.55	1.14	1.42	2.02	2.68	2.84	2.54	2.17	1.52			
110	1.76	1.89	2.22	7.12	15.2	8.30	2.20	1.78	1.50	1.71	2.13	2.52	2.70	2.60	2.29	1.84			
115	2.03	2.03	2.35	2.59	3.24	2.60	2.21	2.00	1.74	1.92	2.29	2.61	2.77	2.73	2.46	2.05			
120	2.42	2.33	2.59	2.65	2.68	2.62	2.48	2.34	2.11	2.23	2.52	2.80	2.95	2.93	2.70	2.37			
125	2.66	2.57	2.74	2.80	2.82	2.78	2.66	2.56	2.35	2.43	2.67	2.92	3.06	3.05	2.86	2.59			
130	3.00	2.90	2.98	3.02	3.04	3.02	2.91	2.87	2.68	2.73	2.90	3.11	3.21	3.23	3.09	2.90			
135	3.19	3.11	3.14	3.17	3.17	3.16	3.08	3.06	2.88	2.92	3.05	3.23	3.31	3.34	3.24	3.10			
140	3.46	3.40	3.39	3.37	3.36	3.37	3.32	3.32	3.18	3.17	3.27	3.41	3.44	3.51	3.46	3.38			
145	3.63	3.57	3.56	3.52	3.49	3.53	3.48	3.49	3.36	3.33	3.41	3.53	3.54	3.63	3.61	3.55			
150	3.87	3.83	3.80	3.74	3.70	3.74	3.70	3.73	3.62	3.58	3.61	3.71	3.69	3.80	3.83	3.80			
155	4.02	4.00	3.96	3.88	3.86	3.88	3.84	3.89	3.80	3.75	3.75	3.84	3.83	3.91	3.97	3.97			
160	4.26	4.24	4.17	4.08	4.11	4.09	4.06	4.14	4.07	4.02	3.99	4.04	4.06	4.09	4.19	4.23			
165	4.41	4.39	4.32	4.23	4.29	4.22	4.22	4.31	4.26	4.21	4.17	4.18	4.23	4.22	4.34	4.40			
170	4.65	4.63	4.56	4.47	4.51	4.46	4.48	4.59	4.54	4.50	4.45	4.43	4.46	4.45	4.57	4.66			
175	4.81	4.78	4.72	4.64	4.67	4.63	4.68	4.79	4.72	4.68	4.63	4.61	4.62	4.61	4.73	4.83			
180	4.96	4.92	4.87	4.83	4.86	4.84	4.94	5.02	4.95	4.92	4.87	4.83	4.87	4.84	4.93	5.03			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-05

□ Range: 0 - 180DEG
□ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:5.749m [K=1.0000]
Remarks: