



1718 W. Fullerton Chicago, IL 60614
 Ph: 773.770.1195 • Fax: 773.935.5613
 www.PureEdgeLighting.com • info@PureEdgeLighting.com
 © 2016 PureEdge Lighting. All Rights Reserved.


Installation Instructions for Tie Stix Suspension Dynamic/Tunable White Center Feed Direct Down Light, Remote Power

TXSR-2_K6K


IMPORTANT INFORMATION

- This product is ETL listed.
- This product is suitable for indoor locations.
- This instruction shows a typical instruction.

SAVE THESE INSTRUCTIONS!

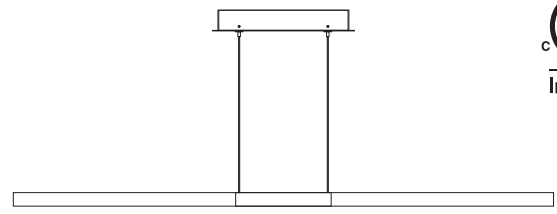


Section One: Install the Canopy

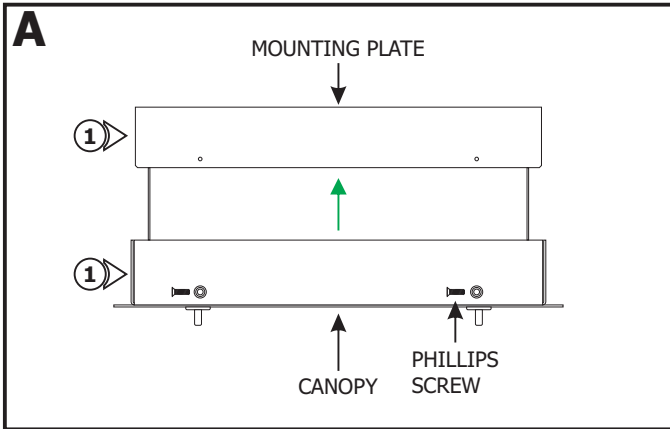


NOTE: It is recommended more than one person assist in this installation.

1: Remove the four Phillips screws from the canopy to remove the mounting plate.

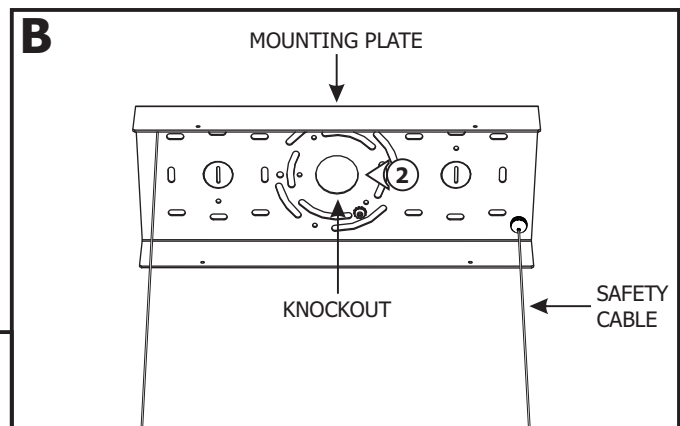


2: Select the appropriate knockout on the mounting plate and remove it using a flathead screwdriver or other appropriate tool.

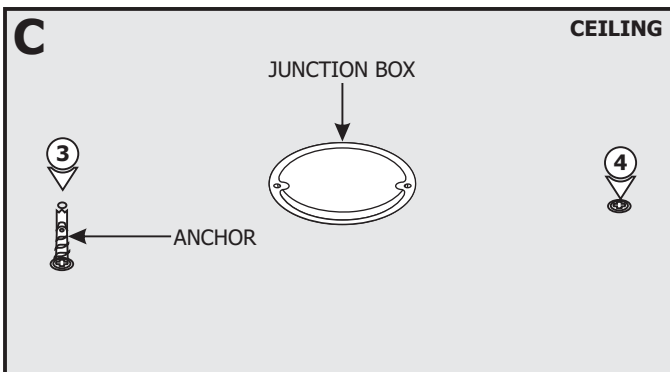

3: Align the mounting plate holes with the junction box. Mark one point on each side of the junction box onto the ceiling.

NOTE: Step 4 is for drywall mounting. Omit this step if mounting directly onto a wood surface.

4: Tap the anchors onto the marked points up to the threaded portion with a hammer. Then screw in the threaded portion with a Phillips screw driver.

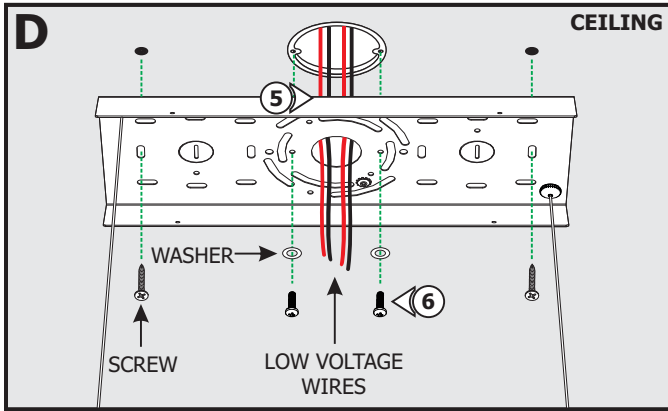


NOTE: Ensure remote power supply wires are present in the junction box. Refer to the instructions provided with the power supply.


5: Feed the low voltage 24VDC wires through the mounting plate knockout.

6: Secure the mounting plate to the junction box and anchors using the provided screws and washers.

Section Two: Install the Coaxial Cable

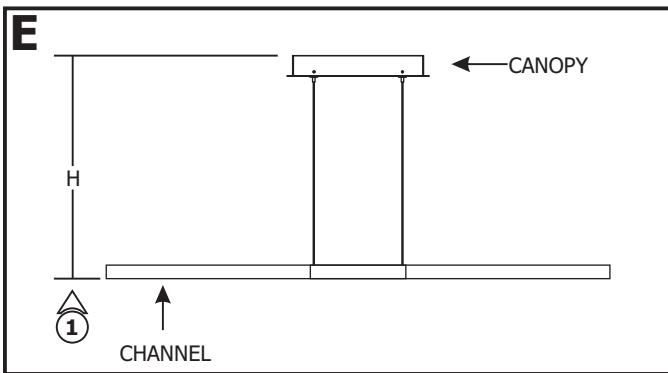


1: Determine the fixture height (H), from the bottom of the channel to the top of the canopy.

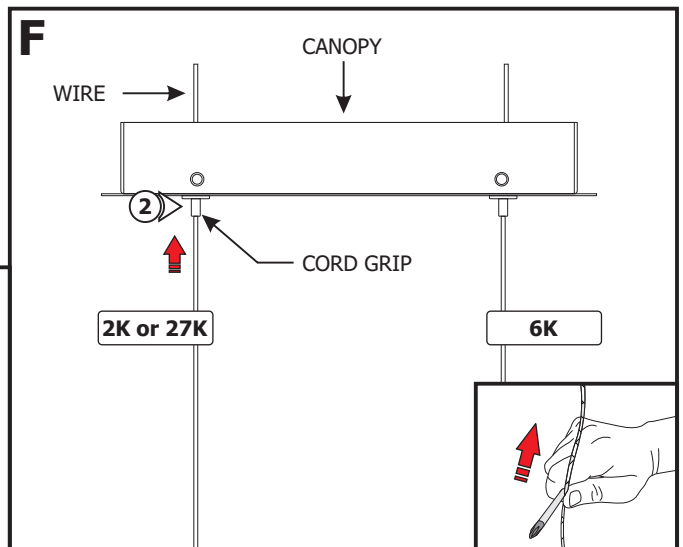

NOTE: Cord grips hold the fixture weight only. **DO NOT** pull on the fixture during installation or cleaning which may cause the **power wires to nick and short.**

NOTE: If cable is curled or kinked, straighten by holding between the shaft of a screwdriver and thumb and pulling the cable through.

2: Push each cable through the cord grips on the canopy.

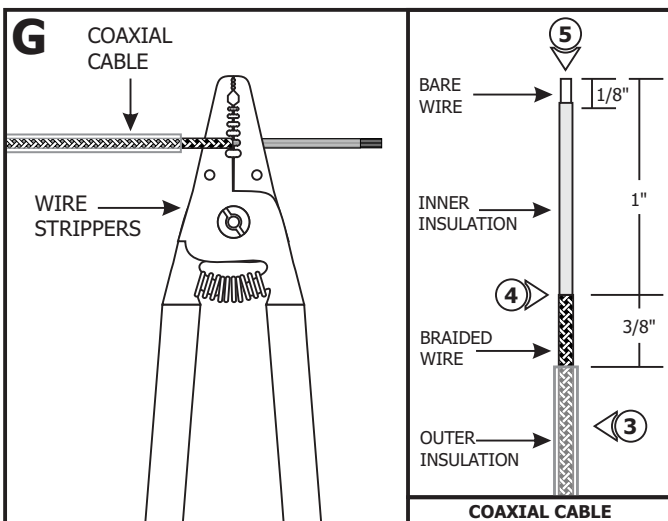


NOTE: Scan the QR Code to watch the video clip of the following steps or visit www.PureEdgeLighting.com/video_feed/installation_cxc_connector

3: Use the 18AWG hole of the wire stripper to remove 1-3/8" of the outer insulation to expose the braided wire.

4: Use the 18AWG hole of the wire stripper to remove 1" of the braided wire making sure not to nick the inner wire insulation.



5: Use the 20AWG hole of the wire stripper to move 1/8" of the inner insulated wire.

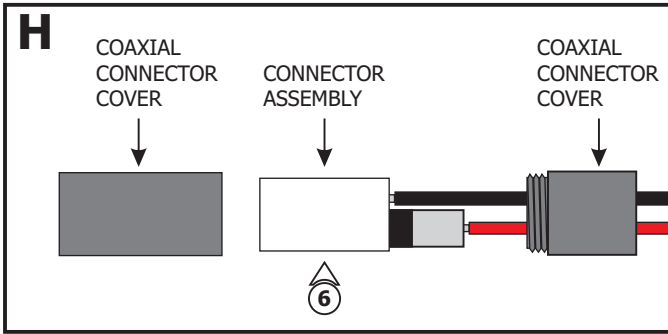

6: Unscrew the coaxial connector covers and remove from the connector assembly.


7: Using the provided 1.5mm Allen Wrench, remove the M3 set screw from the coaxial connector assembly.

8: Using the provided 2mm Allen wrench to loosen (do not remove) the M4 set screw.

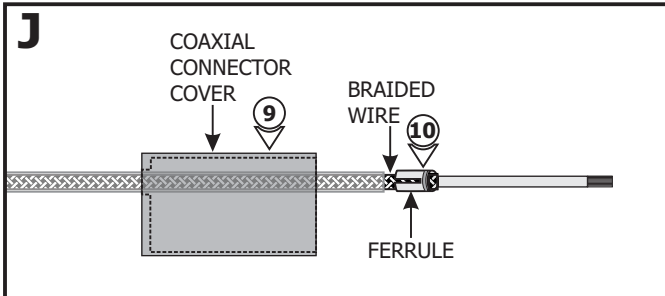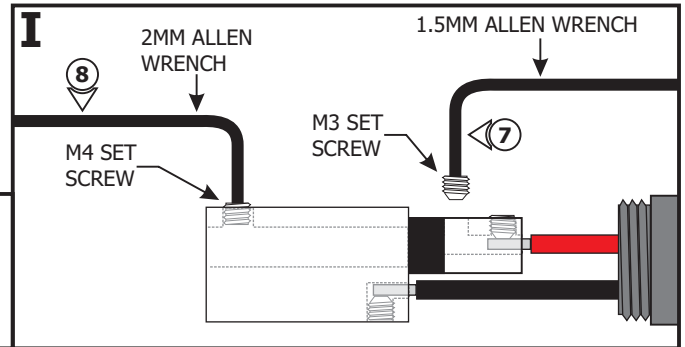


9: Slide the connector cover over the coaxial cable.

10: Place the ferrule over the 3/8" braided wire of the coaxial cable.

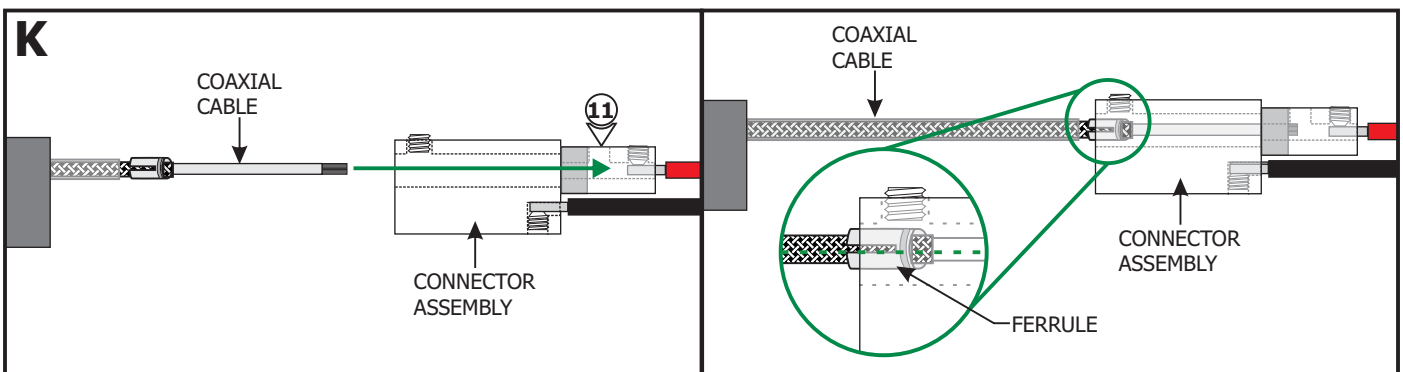


11: Insert the coaxial cable into the coaxial connector until the wires of the center conductor are visible through the M3 set screw hole.


NOTE: Ensure that the split in the ferrule is aligned 90° from the M4 set screw (see inset).

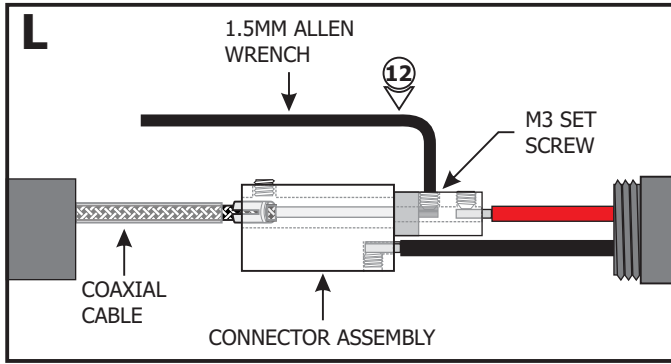

12: Use the provided 1.5mm Allen wrench to replace and securely tighten the M3 set screw.

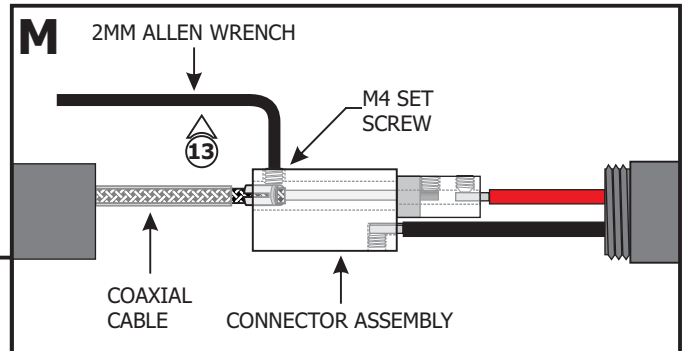


13: Use the provided 2mm Allen wrench to securely tighten the M4 set screw until it squeezes the wire ferrule tightly to the coaxial cable.

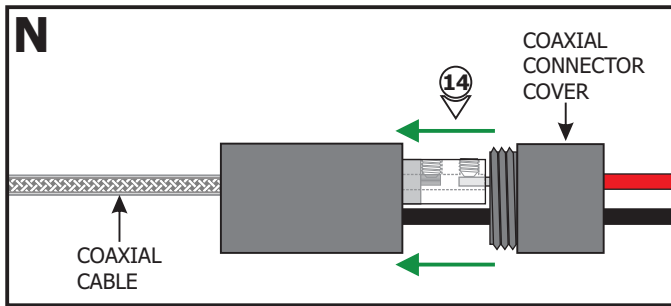

14: Replace the coaxial connector cover and tighten into place.

15: Repeat steps 3 through 14 for the other coaxial cable.

Section Three: Power the Fixture

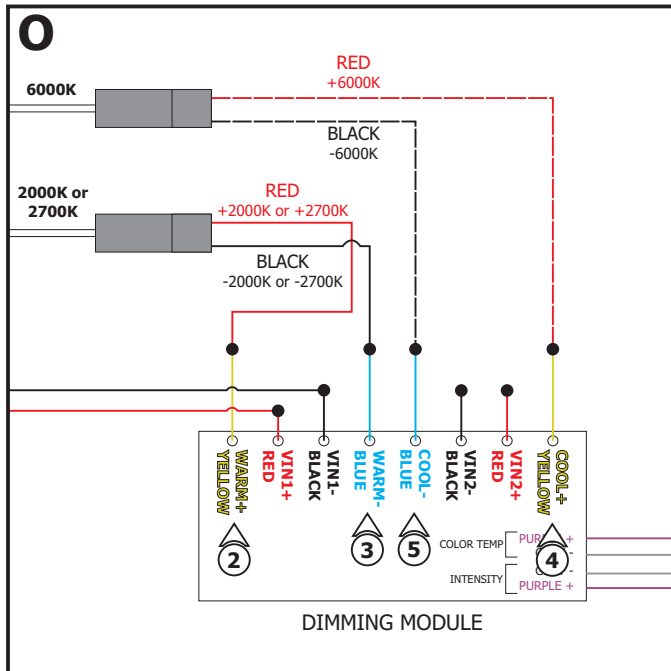

1: Run the proper size wires from the power supply enclosure to the fixture.


2: Connect the red coaxial connector wire for +2000K or +2700K to the Warm+ Yellow dimming module wire using a wire nut.

3: Connect the black coaxial connector wire for -2000K or -2700K to the Warm- Blue dimming module wire using a wire nut.

4: Connect the red coaxial connector wire for +6000K to the Cool+ Yellow dimming module wire using a wire nut.

5: Connect the black coaxial connector wire for -6000K to the Cool- Blue dimming module wire using a wire nut.



CAUTION: Test the fixture before continuing.

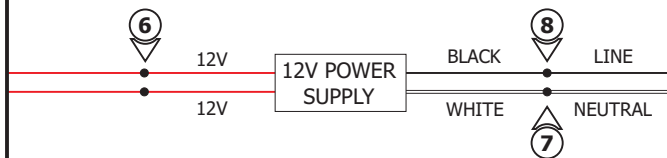P**For Models Configured with Fast Jack Port:**

- 6:** Connect each low voltage red wire from the 12V power supply to each red wire of the Fast Jack connector using a wire nut.
- 7:** Connect the neutral power wire from another 120VAC circuit to the white wire of the power supply using a wire nut.
- 8:** Connect the line wire from the same 120VAC circuit to the black wire of the power supply using a wire nut.

9: Place all the wires and wire nut connections inside the canopy.



10: Align and secure the canopy to the mounting plate by tightening the four screws.

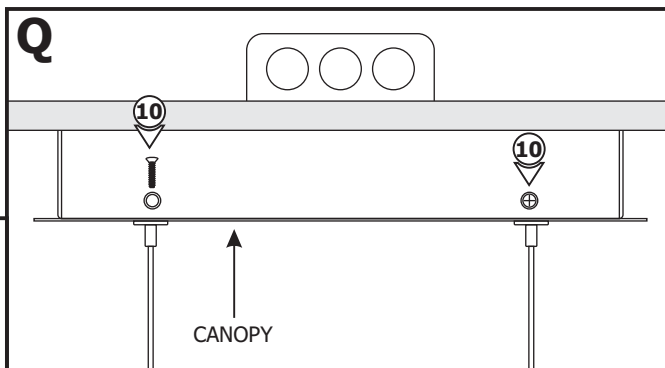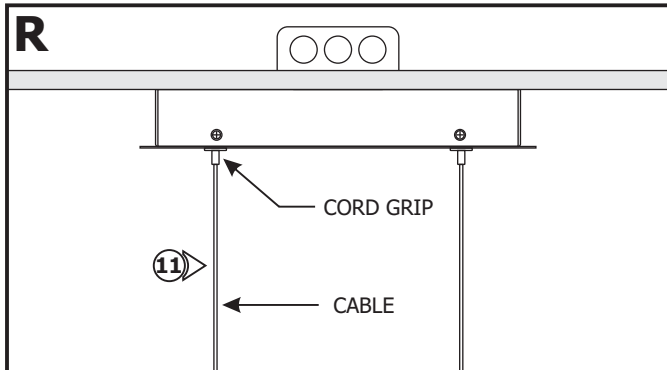Q**R**

11: To make any adjustments to the fixture height, push the cord grips to slide the fixture up and down until the desired height is achieved. Release the cord grips to lock the cables in place.

General Wiring Diagram

Tunable White: LED Power Supply with two Channel Controls, for Intensity and Color Temperature

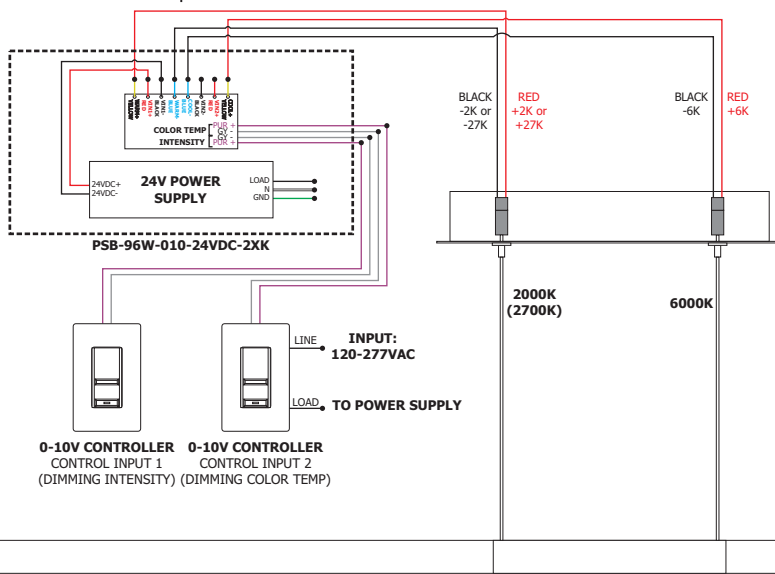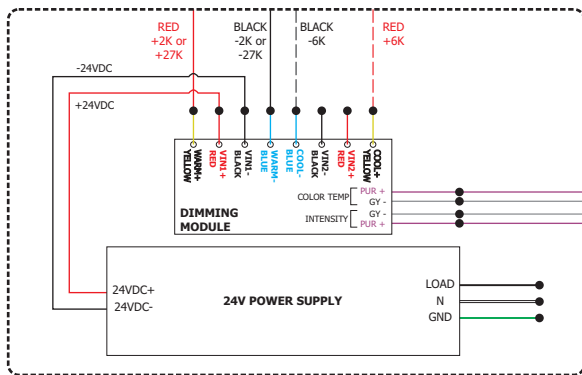

Wiring for Fast Jack Port

