

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	506.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	151.2V x 106.0H
	At 50% of Imax	105.2V x 75.7H
	At 90% of Imax	47.6V x 45.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	968.1 lumens per klm.
	To 50% of Imax	757.2 lumens per klm.
	To 90% of Imax	242.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE:三合一+3030-2D	WEIGHT:
SPEC.:3000K	DIM.: RGB+W3000K	SERIAL No.:2019112610
MFR.: EVERFINE	SUR.:1.22*0.01	Shielding Angle:

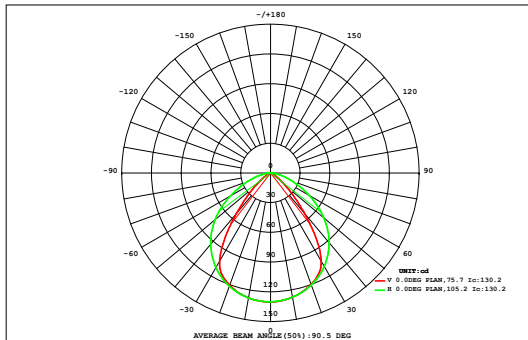

DATA OF LAMP		Eff:17.01lm/W	
MODEL		Imax (cd)	130.2
NOMINAL POWER (W)	14	AVAILABILITY (%)	96.6
RATED VOLTAGE (V)	24	Avai. FLUX (lm)	248.2
NOMINAL FLUX (lm)	256.894	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	256.9
TEST VOLTAGE (V)	24.0932	θ @50% (H,V)	76,105DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.05	0.08	0.08	0.05	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.34	0.00
90	0.00	0.00	0.00	0.01	0.03	0.07	0.15	0.28	0.40	0.40	0.27	0.14	0.06	0.03	0.01	0.00	0.00	0.00	1.84	0.66
80	0.00	0.00	0.01	0.02	0.09	0.24	0.48	0.75	0.98	0.96	0.71	0.43	0.21	0.08	0.02	0.01	0.00	0.00	5.01	4.24
70	0.00	0.00	0.01	0.04	0.18	0.54	1.08	1.50	1.76	1.74	1.44	0.99	0.48	0.16	0.04	0.01	0.00	0.00	9.99	9.52
60	0.00	0.00	0.02	0.06	0.30	0.92	1.75	2.28	2.51	2.50	2.26	1.69	0.85	0.28	0.06	0.02	0.01	0.00	15.5	15.1
50	0.00	0.01	0.02	0.11	0.43	1.23	2.21	2.84	3.08	3.08	2.85	2.19	1.18	0.40	0.10	0.02	0.01	0.00	19.8	19.4
40	0.00	0.01	0.03	0.16	0.61	1.58	2.67	3.24	3.50	3.50	3.26	2.64	1.52	0.57	0.15	0.03	0.01	0.00	23.5	23.2
30	0.00	0.01	0.03	0.19	0.75	1.92	2.98	3.50	3.77	3.77	3.52	2.98	1.88	0.73	0.19	0.03	0.01	0.00	26.3	26.0
20	0.00	0.01	0.03	0.20	0.79	2.02	3.10	3.63	3.89	3.90	3.64	3.12	2.02	0.78	0.20	0.03	0.01	0.00	27.4	27.1
10	0.00	0.01	0.03	0.20	0.78	2.01	3.09	3.61	3.88	3.89	3.64	3.12	2.03	0.79	0.20	0.03	0.01	0.00	27.3	27.0
0	0.00	0.01	0.03	0.19	0.73	1.87	2.95	3.47	3.73	3.74	3.49	2.98	1.91	0.75	0.20	0.03	0.01	0.00	26.1	25.8
-10	0.00	0.01	0.03	0.15	0.58	1.52	2.61	3.19	3.45	3.45	3.20	2.64	1.57	0.61	0.16	0.03	0.01	0.00	23.2	22.9
-20	0.00	0.01	0.02	0.10	0.40	1.17	2.13	2.77	3.02	3.02	2.79	2.17	1.21	0.43	0.11	0.02	0.01	0.00	19.4	19.0
-30	0.00	0.00	0.02	0.06	0.27	0.83	1.63	2.18	2.43	2.44	2.22	1.69	0.89	0.30	0.06	0.02	0.01	0.00	15.0	14.7
-40	0.00	0.00	0.01	0.04	0.16	0.46	0.94	1.37	1.66	1.68	1.44	1.03	0.52	0.18	0.04	0.01	0.00	0.00	9.56	9.08
-50	0.00	0.00	0.01	0.02	0.07	0.20	0.41	0.67	0.91	0.92	0.71	0.46	0.23	0.09	0.02	0.01	0.00	0.00	4.74	3.94
-60	0.00	0.00	0.00	0.01	0.02	0.05	0.12	0.24	0.36	0.37	0.25	0.14	0.06	0.03	0.01	0.00	0.00	0.00	1.68	0.49
-70	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.04	0.07	0.07	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.30	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.01	0.08	0.32	1.55	6.21	16.6	28.3	35.6	39.5	39.5	35.8	28.5	16.6	6.22	1.58	0.34	0.09	0.01	257	---
Φ a	0.00	0.00	0.00	0.46	5.38	16.1	27.8	35.1	39.0	39.1	35.3	28.0	16.1	5.39	0.48	0.00	0.00	0.00	---	248


one-half-peak spread: U:52.3,D:53.5 , L:37.9,R:34.1 NEMA Beam Type: Type 6 x 7 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE: 三合一+3030-2D	WEIGHT:
SPEC.: 3000K	DIM.: RGB+W3000K	SERIAL No.: 2019112610
MFR.: EVERFINE	SUR.: 1.22*0.01	Shielding Angle:

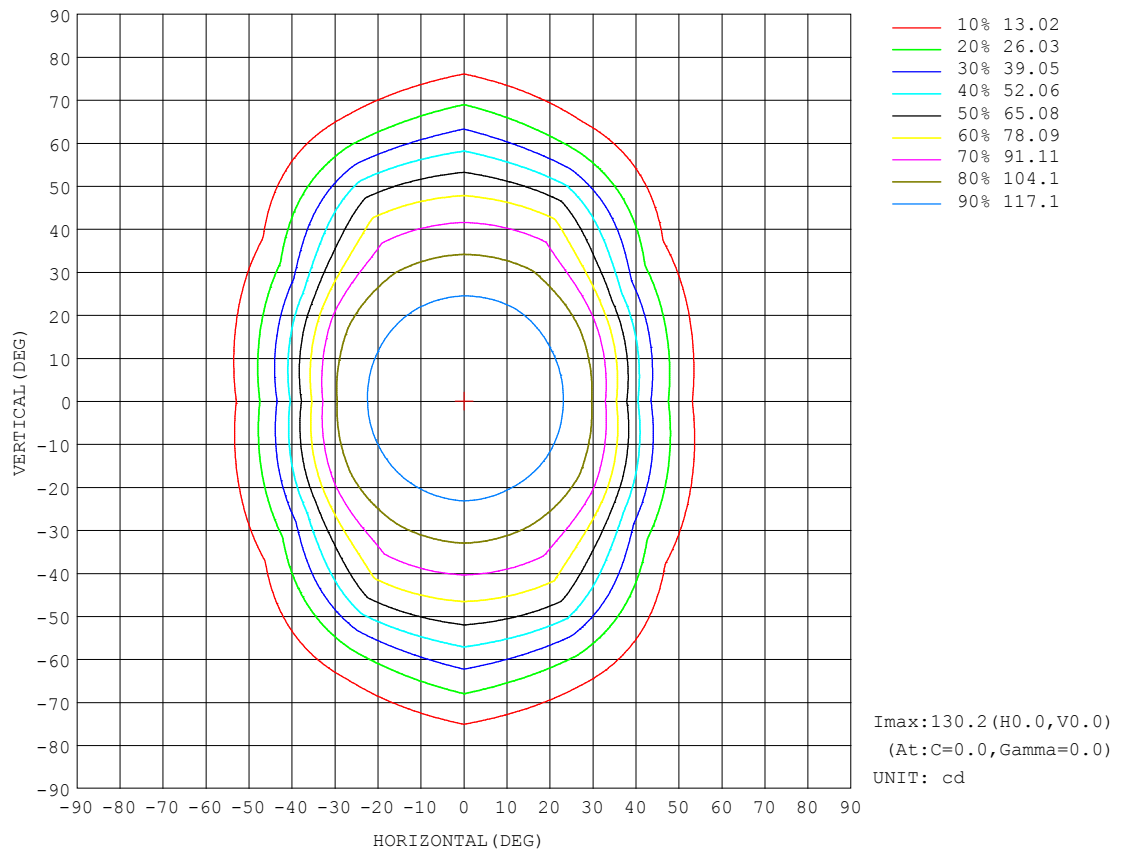


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE:三合一+3030-2D	WEIGHT:
SPEC.:3000K	DIM.: RGB+W3000K	SERIAL No.:2019112610
MFR.: EVERFINE	SUR.:1.22*0.01	Shielding Angle:

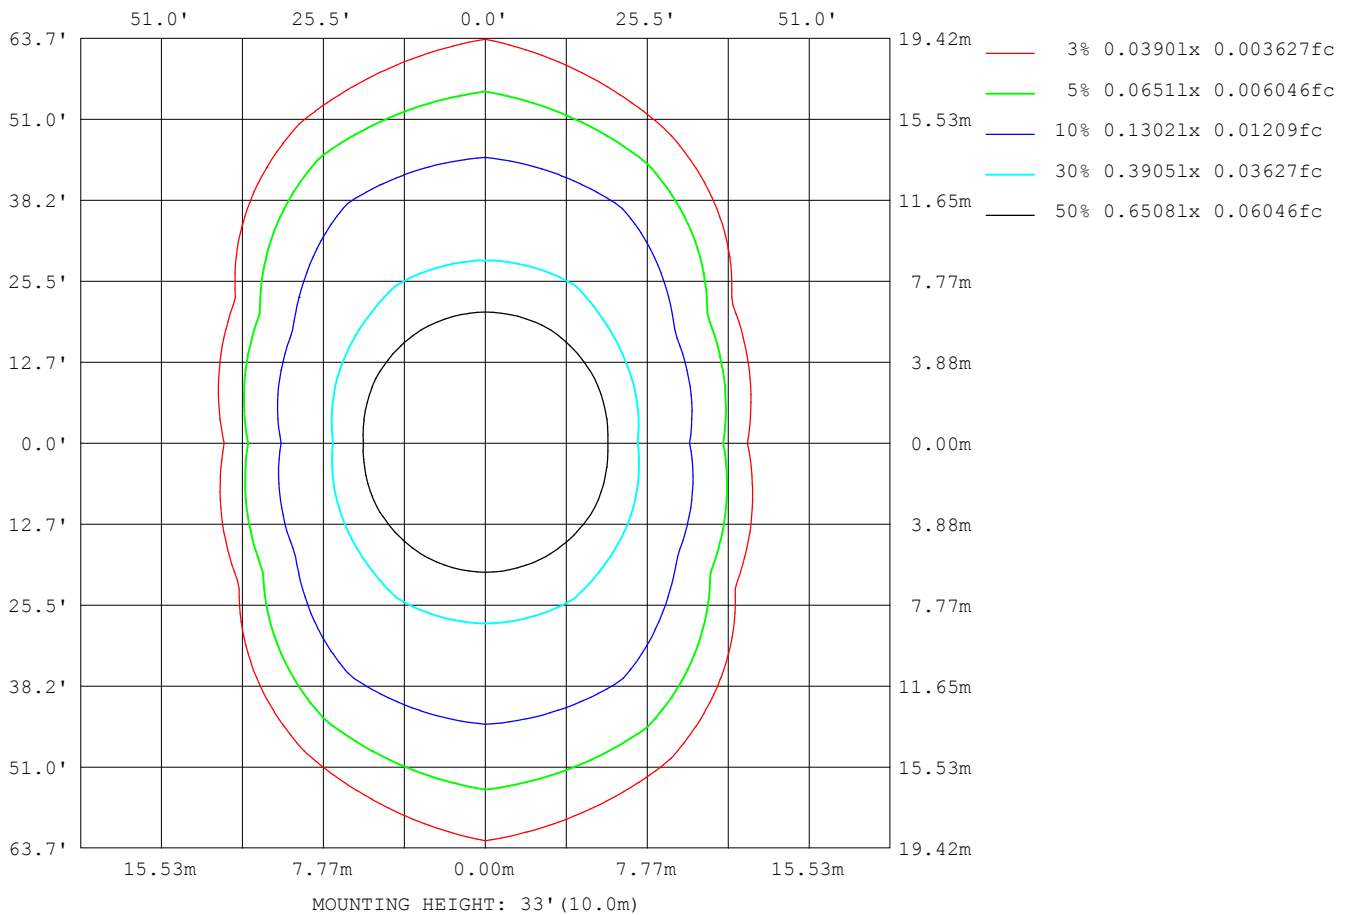

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

Planar Illuminance Curve

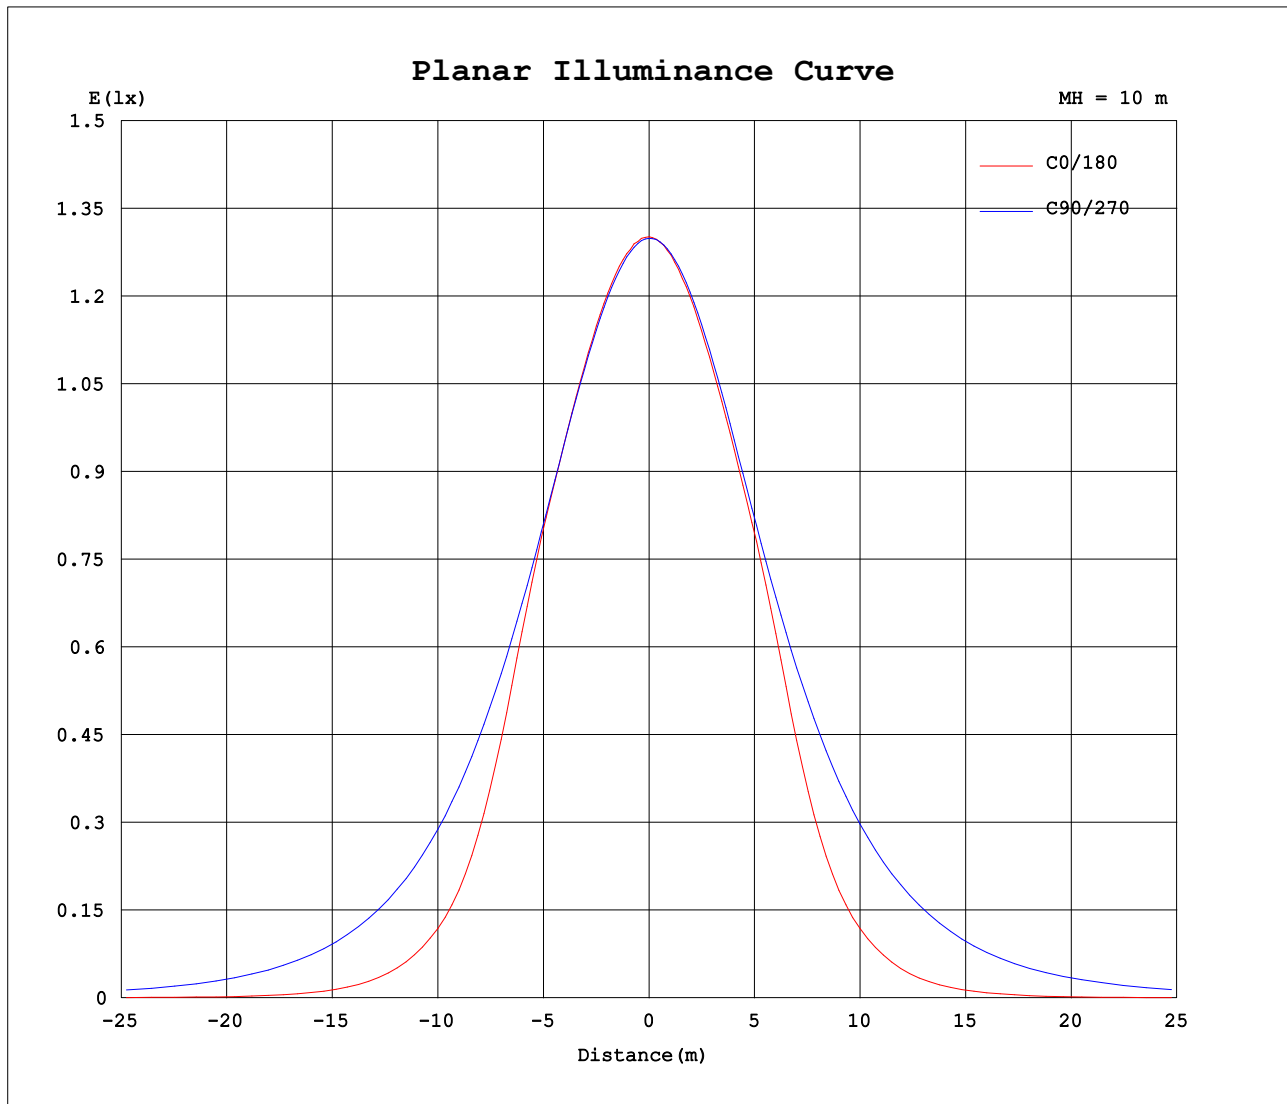


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Leo
Test Date: 2019-11-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.400m [K=1.0000]
Remarks:

AAI CURVES

Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE:三合一+3030-2D	WEIGHT:
SPEC.:3000K	DIM.: RGB+W3000K	SERIAL No.:2019112610
MFR.: EVERFINE	SUR.:1.22*0.01	Shielding Angle:

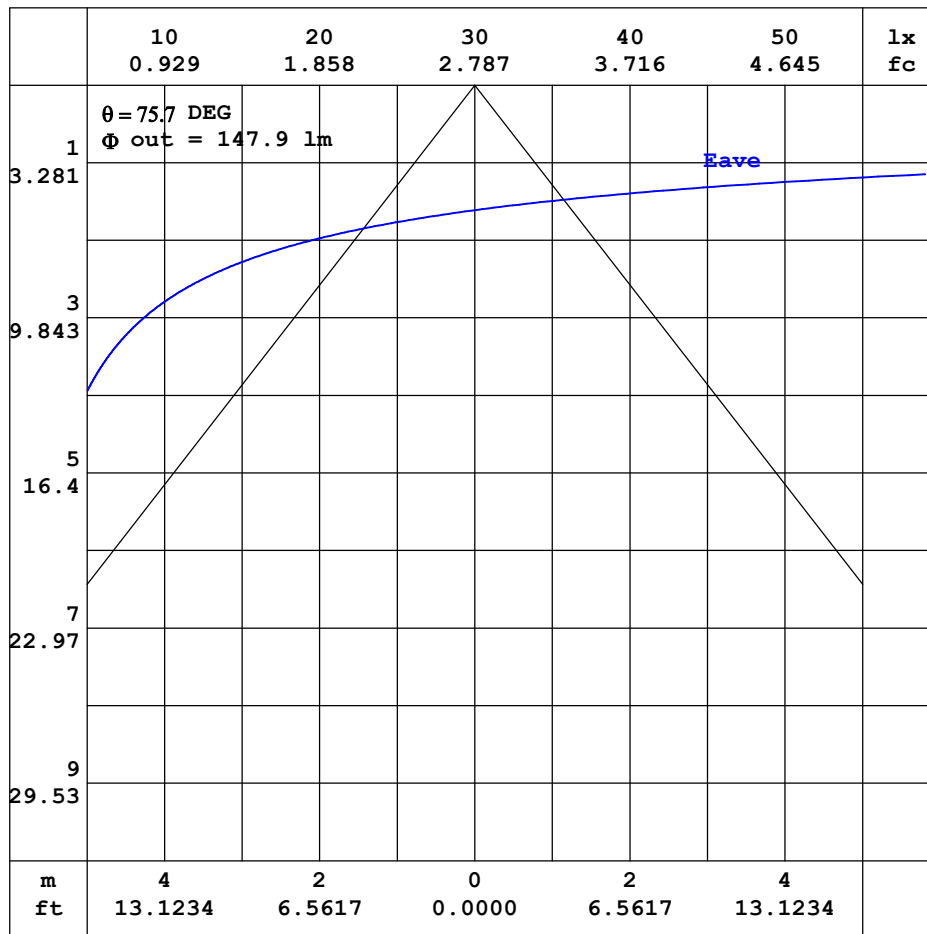

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Leo
 Test Date: 2019-11-26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.400m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE:三合一+3030-2D	WEIGHT:
SPEC.:3000K	DIM.: RGB+W3000K	SERIAL No.:2019112610
MFR.: EVERFINE	SUR.:1.22*0.01	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.11	0.13	0.14	0.15	0.16	0.17	0.18	0.18	0.19	0.19	0.20
-85	0.06	0.06	0.07	0.07	0.08	0.08	0.08	0.11	0.14	0.19	0.25	0.32	0.39	0.64	0.92	1.21	1.51	1.80	2.08
-80	0.06	0.06	0.07	0.07	0.08	0.09	0.16	0.28	0.39	0.52	0.66	0.80	0.94	1.73	2.67	3.67	4.69	5.69	6.65
-75	0.06	0.06	0.07	0.07	0.14	0.25	0.35	0.53	0.74	1.00	1.35	1.82	2.41	4.00	5.86	7.79	9.69	11.5	13.2
-70	0.06	0.06	0.07	0.13	0.27	0.42	0.59	0.83	1.26	1.91	2.86	4.11	5.65	8.19	11.2	14.1	16.9	19.6	22.0
-65	0.06	0.06	0.07	0.23	0.40	0.61	0.80	1.15	1.97	3.27	5.15	7.61	10.6	14.4	18.5	22.5	26.2	29.6	32.6
-60	0.06	0.06	0.10	0.31	0.55	0.77	1.01	1.44	2.77	4.94	8.08	12.2	17.2	22.8	28.2	33.3	37.8	41.6	44.8
-55	0.06	0.06	0.17	0.40	0.68	0.93	1.24	1.63	3.58	6.92	11.7	18.0	25.6	34.2	41.0	46.7	51.4	54.9	57.6
-50	0.06	0.06	0.22	0.50	0.79	1.10	1.49	2.13	4.48	9.27	16.1	25.1	35.8	47.6	55.8	61.4	65.5	68.3	70.1
-45	0.06	0.06	0.27	0.59	0.90	1.27	1.81	2.89	5.41	11.8	21.0	32.8	46.1	59.8	69.9	74.8	78.3	80.5	81.6
-40	0.06	0.06	0.30	0.66	1.00	1.44	2.21	3.91	7.23	14.3	26.0	40.0	54.9	69.3	81.4	85.8	88.9	90.9	91.9
-35	0.06	0.06	0.34	0.72	1.10	1.62	2.69	5.15	9.67	16.8	30.4	46.3	62.8	77.6	89.2	94.9	98.0	100.0	101
-30	0.06	0.07	0.38	0.77	1.19	1.80	3.22	6.49	12.4	21.5	34.2	52.7	71.3	86.6	96.8	103	106	108	109
-25	0.06	0.08	0.42	0.82	1.26	1.98	3.73	7.80	15.0	25.8	40.5	60.1	80.8	95.6	104	109	112	114	115
-20	0.06	0.08	0.45	0.85	1.32	2.12	4.19	8.97	17.3	29.8	46.9	68.8	90.0	103	110	114	118	120	120
-15	0.06	0.08	0.48	0.88	1.37	2.22	4.53	9.84	19.0	32.8	52.0	75.6	96.3	108	114	119	122	124	124
-10	0.06	0.08	0.50	0.90	1.39	2.26	4.70	10.3	19.9	34.6	55.0	79.8	100	111	117	121	125	126	127
-5	0.06	0.08	0.51	0.91	1.40	2.22	4.65	10.3	20.0	34.9	55.8	81.4	102	113	119	123	126	128	129
0	0.06	0.08	0.51	0.90	1.38	2.13	4.39	9.78	19.1	33.6	54.0	80.1	103	114	120	124	127	129	130
5	0.06	0.08	0.51	0.91	1.40	2.26	4.73	10.5	20.3	35.3	56.4	81.9	103	113	119	124	127	129	130
10	0.06	0.08	0.50	0.91	1.41	2.32	4.86	10.6	20.4	35.4	56.1	81.0	101	112	118	122	125	127	128
15	0.06	0.08	0.48	0.89	1.39	2.30	4.75	10.3	19.7	33.9	53.6	77.5	97.8	109	115	120	123	125	125
20	0.06	0.08	0.46	0.86	1.35	2.21	4.44	9.51	18.2	31.1	48.9	71.4	92.4	105	111	116	119	121	122
25	0.06	0.08	0.42	0.83	1.29	2.06	4.00	8.36	16.0	27.2	42.6	63.0	83.6	97.9	106	111	114	116	117
30	0.06	0.07	0.39	0.79	1.22	1.88	3.49	7.04	13.4	23.0	36.2	55.4	74.1	89.2	99.1	105	108	109	110
35	0.06	0.07	0.35	0.74	1.13	1.69	2.92	5.66	10.6	18.3	32.6	49.0	65.7	80.5	91.7	97.2	100	102	103
40	0.06	0.06	0.31	0.68	1.03	1.50	2.37	4.35	8.01	16.0	28.6	43.2	58.3	72.5	84.5	88.5	91.3	93.2	94.1
45	0.06	0.06	0.28	0.61	0.92	1.32	1.92	3.20	6.08	13.4	23.7	36.5	50.4	64.2	74.0	78.2	81.2	83.2	84.1
50	0.06	0.06	0.23	0.52	0.82	1.14	1.58	2.31	5.11	10.7	18.6	28.7	40.5	53.2	61.0	65.8	69.3	71.7	73.0
55	0.06	0.06	0.18	0.42	0.70	0.97	1.31	1.75	4.12	8.08	13.7	21.0	29.8	39.5	46.0	51.3	55.4	58.4	60.5
60	0.06	0.06	0.12	0.32	0.58	0.81	1.06	1.58	3.24	5.87	9.58	14.4	20.2	26.5	32.0	36.9	41.1	44.5	47.2
65	0.06	0.06	0.09	0.24	0.43	0.65	0.85	1.29	2.36	4.01	6.31	9.27	12.8	16.9	21.1	25.1	28.8	32.0	34.8
70	0.06	0.06	0.07	0.15	0.29	0.46	0.63	0.94	1.52	2.41	3.68	5.30	7.24	9.97	13.0	16.0	18.8	21.5	23.8
75	0.06	0.06	0.07	0.08	0.17	0.28	0.39	0.60	0.86	1.23	1.75	2.42	3.23	5.02	7.03	9.07	11.1	12.9	14.7
80	0.06	0.06	0.07	0.07	0.09	0.12	0.20	0.32	0.44	0.56	0.72	0.90	1.10	2.02	3.12	4.25	5.39	6.50	7.55
85	0.06	0.06	0.07	0.07	0.07	0.08	0.08	0.11	0.16	0.22	0.29	0.36	0.44	0.74	1.07	1.41	1.77	2.12	2.45
90	0.06	0.06	0.07	0.07	0.07	0.08	0.08	0.09	0.10	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.19	0.20

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.09V I:0.6267A P:15.10W PF:1.0000 Freq:0Hz Lamp Flux:256.894x1 lm		
NAME: DISNEY	TYPE:三合一+3030-2D	WEIGHT:
SPEC.:3000K	DIM.: RGB+W3000K	SERIAL No.:2019112610
MFR.: EVERFINE	SUR.:1.22*0.01	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.20	0.19	0.19	0.18	0.18	0.17	0.16	0.14	0.12	0.10	0.09	0.07	0.07	0.07	0.07	0.07	0.07	0.07	
-85	1.81	1.53	1.24	0.96	0.69	0.45	0.38	0.31	0.25	0.18	0.13	0.08	0.07	0.07	0.07	0.07	0.07	0.07	
-80	5.73	4.77	3.78	2.80	1.85	1.05	0.87	0.71	0.57	0.44	0.32	0.22	0.16	0.12	0.09	0.07	0.07	0.07	
-75	11.7	10.0	8.28	6.47	4.69	3.09	2.32	1.67	1.17	0.82	0.57	0.40	0.30	0.22	0.14	0.09	0.07	0.07	
-70	19.9	17.5	15.0	12.3	9.54	7.01	5.11	3.53	2.32	1.47	0.92	0.62	0.47	0.33	0.22	0.12	0.07	0.07	
-65	30.1	27.1	23.8	20.1	16.3	12.4	8.96	6.11	3.90	2.29	1.26	0.84	0.65	0.46	0.29	0.16	0.08	0.07	
-60	42.3	39.1	35.2	30.6	25.6	19.6	14.0	9.32	5.71	3.16	1.54	1.05	0.83	0.60	0.38	0.21	0.09	0.07	
-55	55.7	52.8	49.0	43.9	37.9	28.7	20.3	13.3	7.91	4.06	1.72	1.30	0.99	0.73	0.48	0.25	0.10	0.07	
-50	68.9	66.7	63.3	58.5	51.0	39.0	27.7	18.1	10.5	5.07	2.33	1.58	1.16	0.86	0.57	0.30	0.11	0.07	
-45	80.8	78.9	76.0	71.7	62.2	48.7	35.3	23.1	13.2	6.10	3.24	1.95	1.34	0.97	0.65	0.35	0.12	0.07	
-40	91.1	89.3	86.5	82.5	70.9	56.8	42.1	28.0	15.9	8.04	4.39	2.42	1.53	1.08	0.73	0.39	0.14	0.07	
-35	100	98.3	95.4	90.0	79.1	64.5	48.1	32.1	18.3	10.7	5.71	2.97	1.74	1.18	0.80	0.44	0.15	0.07	
-30	108	106	103	97.6	87.9	73.2	54.8	35.9	22.9	13.5	7.11	3.53	1.94	1.27	0.86	0.48	0.16	0.07	
-25	114	112	109	105	96.9	82.8	62.5	42.4	27.2	16.1	8.48	4.07	2.13	1.35	0.91	0.51	0.18	0.07	
-20	120	118	115	111	104	91.9	71.0	48.7	31.0	18.3	9.63	4.52	2.28	1.42	0.95	0.54	0.19	0.07	
-15	124	122	119	115	109	97.7	77.2	53.4	33.8	19.8	10.4	4.86	2.37	1.47	0.98	0.56	0.20	0.07	
-10	127	125	122	118	112	101	81.0	56.1	35.4	20.6	10.8	4.98	2.39	1.50	1.00	0.58	0.20	0.07	
-5	129	127	124	120	114	103	82.1	56.4	35.3	20.6	10.6	4.87	2.33	1.50	1.01	0.58	0.21	0.07	
0	130	128	125	121	115	103	80.5	54.2	33.7	19.6	9.97	4.55	2.21	1.49	1.01	0.59	0.21	0.07	
5	129	127	124	120	114	103	81.8	55.9	34.9	20.3	10.5	4.80	2.30	1.50	1.01	0.58	0.21	0.07	
10	127	126	123	118	112	101	80.1	55.0	34.6	20.1	10.5	4.84	2.33	1.49	1.00	0.58	0.20	0.07	
15	125	123	120	116	109	97.0	75.7	51.8	32.7	19.1	10.0	4.65	2.29	1.46	0.98	0.56	0.20	0.07	
20	121	119	116	112	104	90.4	68.7	46.6	29.6	17.4	9.13	4.28	2.19	1.42	0.95	0.54	0.19	0.07	
25	116	114	111	106	97.1	81.4	60.0	40.1	25.7	15.2	7.95	3.82	2.05	1.35	0.91	0.51	0.18	0.07	
30	110	108	105	99.1	88.2	72.2	52.9	33.8	21.4	12.5	6.62	3.31	1.88	1.28	0.86	0.48	0.17	0.07	
35	102	100	97.6	91.9	79.6	64.0	46.8	30.6	16.9	9.83	5.25	2.76	1.70	1.18	0.80	0.44	0.15	0.07	
40	93.3	91.5	88.6	84.4	71.5	56.4	40.9	26.5	14.7	7.34	4.02	2.28	1.52	1.09	0.73	0.40	0.14	0.07	
45	83.1	81.0	77.6	72.6	62.0	47.7	33.9	21.7	12.2	5.52	2.95	1.88	1.35	0.98	0.66	0.35	0.12	0.07	
50	71.2	68.3	64.0	58.2	49.6	37.2	26.1	16.7	9.57	4.62	2.19	1.56	1.17	0.87	0.58	0.30	0.11	0.07	
55	57.6	53.8	48.9	42.9	35.8	26.8	18.8	12.2	7.19	3.74	1.69	1.31	1.01	0.74	0.48	0.26	0.10	0.07	
60	43.8	39.8	35.0	29.6	23.8	18.0	12.7	8.49	5.23	2.95	1.52	1.07	0.85	0.61	0.39	0.22	0.09	0.07	
65	31.6	27.9	23.9	19.6	15.2	11.3	8.11	5.54	3.57	2.15	1.24	0.86	0.67	0.47	0.30	0.17	0.08	0.07	
70	21.2	18.3	15.3	12.1	8.96	6.27	4.59	3.21	2.15	1.41	0.91	0.64	0.49	0.34	0.23	0.12	0.08	0.07	
75	12.8	10.8	8.72	6.61	4.55	2.78	2.12	1.56	1.13	0.81	0.59	0.42	0.31	0.24	0.15	0.10	0.07	0.07	
80	6.47	5.33	4.17	3.03	1.94	1.03	0.87	0.72	0.58	0.45	0.33	0.25	0.18	0.13	0.10	0.08	0.07	0.07	
85	2.12	1.77	1.41	1.06	0.73	0.43	0.37	0.30	0.24	0.18	0.13	0.10	0.09	0.08	0.07	0.07	0.07	0.07	
90	0.19	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Leo
Test Date:2019-11-26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.400m [K=1.0000]
Remarks: