

PURE EDGE LIGHTING

TEST REPORT

SCOPE OF WORK

LED Performance Testing

MODEL NUMBER

ST5A-24V-3-2K6K

PROJECT NUMBER

G104797632

REPORT NUMBER

104797632CHI-016

ISSUE DATE

5/23/2022

REVISED DATE

None

TEST DATES

2022-05-10 through 2022-05-18.

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



REPORT NUMBER

104797632CHI-016

MODEL NUMBER(s)

ST5A-24V-3-2K6K

REPORT RENDERED TO:

PURE EDGE LIGHTING
1718 WEST FULLERTON AVE
CHICAGO, IL 60614
USA

STATEMENT OF LIMITATION

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01199885-2.

TEST STANDARDS

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI/IES LM-79-19 Optical and Electrical Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

IES TM-30-18: IES Method for Evaluating Light Source Color Rendition

In Charge of Testing:



Maximilian Carvajal
Engineer
Lighting Division

Reviewer:



Jeff Davis
N.A. Technical Lead
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 104797632CHI-016

ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH04282022112833	ST5A-24V-3-2K6K	LINEAR STRIP LIGHT	Production	4/28/2022

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	ST5A-24V-3-2K6K	1

SAMPLE PHOTOS - TESTED CONFIGURATIONS



SUMMARY

REPORT NO. 104797632CHI-016

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	ST5A-24V-3-2K6K
Product Description:	LINEAR STRIP LIGHT
LED Model No.:	LIANGAN/SMD2837
Driver Model No.:	DR-24V-1100-33D
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	1616.9	1571.5
Input Power (W) @ 120V (Vac)	15.56	15.74
Lumen Efficacy (lm/W)	103.9	99.8
Input Power Factor () @ 120V (Vac)	0.979	0.979

Criteria	Results
Input ATHD (%) @ 120V (Vac)	14.41
Correlated Color Temperature (K)	6357
Color Rendering Index - Ra ()	91.5
Color Rendering Index - R9 ()	62.9
Duv ()	0.0018
Chromaticity Coordinate (x)	0.315
Chromaticity Coordinate (y)	0.329
Chromaticity Coordinate (u')	0.200
Chromaticity Coordinate (v')	0.469

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 104797632CHI-016

Test Configuration	Tested Model No.	Pass/Fail/NA
1	ST5A-24V-3-2K6K	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (I)
Up	120.01	132.5	15.56	0.979

Light Output (lm)	Lumen Efficacy (lm/W)
1616.9	103.9

INTENSITY SUMMARY - CANDELA


Angle	0	22.5	45	67.5	90
0	536.4	536.4	536.4	536.4	536.4
5	530.9	528.4	531.5	537.1	552.8
10	526.9	522.6	525.5	531.6	546.9
15	517.1	513.6	515.9	521.3	536.4
20	505.8	500.2	503.0	507.4	521.8
25	489.2	482.8	486.0	489.8	503.4
30	467.5	462.1	464.7	468.2	480.7
35	443.2	435.9	439.7	442.5	454.2
40	415.0	406.8	409.9	413.4	423.9
45	382.2	374.0	377.3	380.4	389.5
50	346.8	338.1	340.4	343.8	351.4
55	306.5	298.3	299.0	302.9	309.4
60	261.6	253.3	254.6	258.4	263.6
65	212.7	205.7	207.5	210.2	214.6
70	162.4	156.2	157.7	160.1	163.7
75	112.6	106.4	108.0	109.3	111.8
80	65.1	60.4	61.1	61.5	63.7
85	25.7	22.7	23.4	23.7	24.2
90	0.0	0.0	0.0	0.0	0.0
95	0.0	0.0	0.0	0.0	0.0
100	0.0	0.0	0.0	0.0	0.0
105	0.0	0.0	0.0	0.0	0.0
110	0.0	0.0	0.0	0.0	0.0
115	0.0	0.0	0.0	0.0	0.0
120	0.0	0.0	0.0	0.0	0.0
125	0.0	0.0	0.0	0.0	0.0
130	0.0	0.0	0.0	0.0	0.0
135	0.0	0.0	0.0	0.0	0.0
140	0.0	0.0	0.0	0.0	0.0
145	0.0	0.0	0.0	0.0	0.0
150	0.0	0.0	0.0	0.0	0.0
155	0.0	0.0	0.0	0.0	0.0
160	0.0	0.0	0.0	0.0	0.0
165	0.0	0.0	0.0	0.0	0.0
170	0.0	0.0	0.0	0.0	0.0
175	0.0	0.0	0.0	0.0	0.0
180	0.0	0.0	0.0	0.0	0.0

Entire luminous intensity matrix found in .IES file

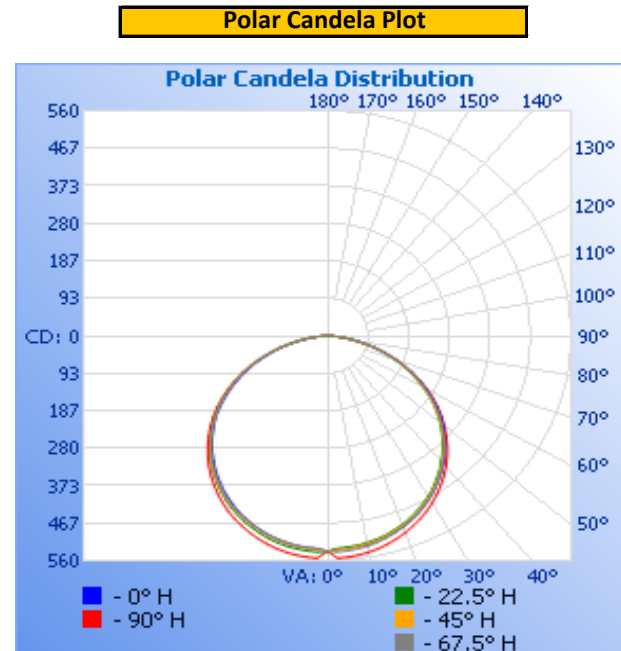

REPORT NO. 104797632CHI-016

ILLUMINANCE SUMMARY

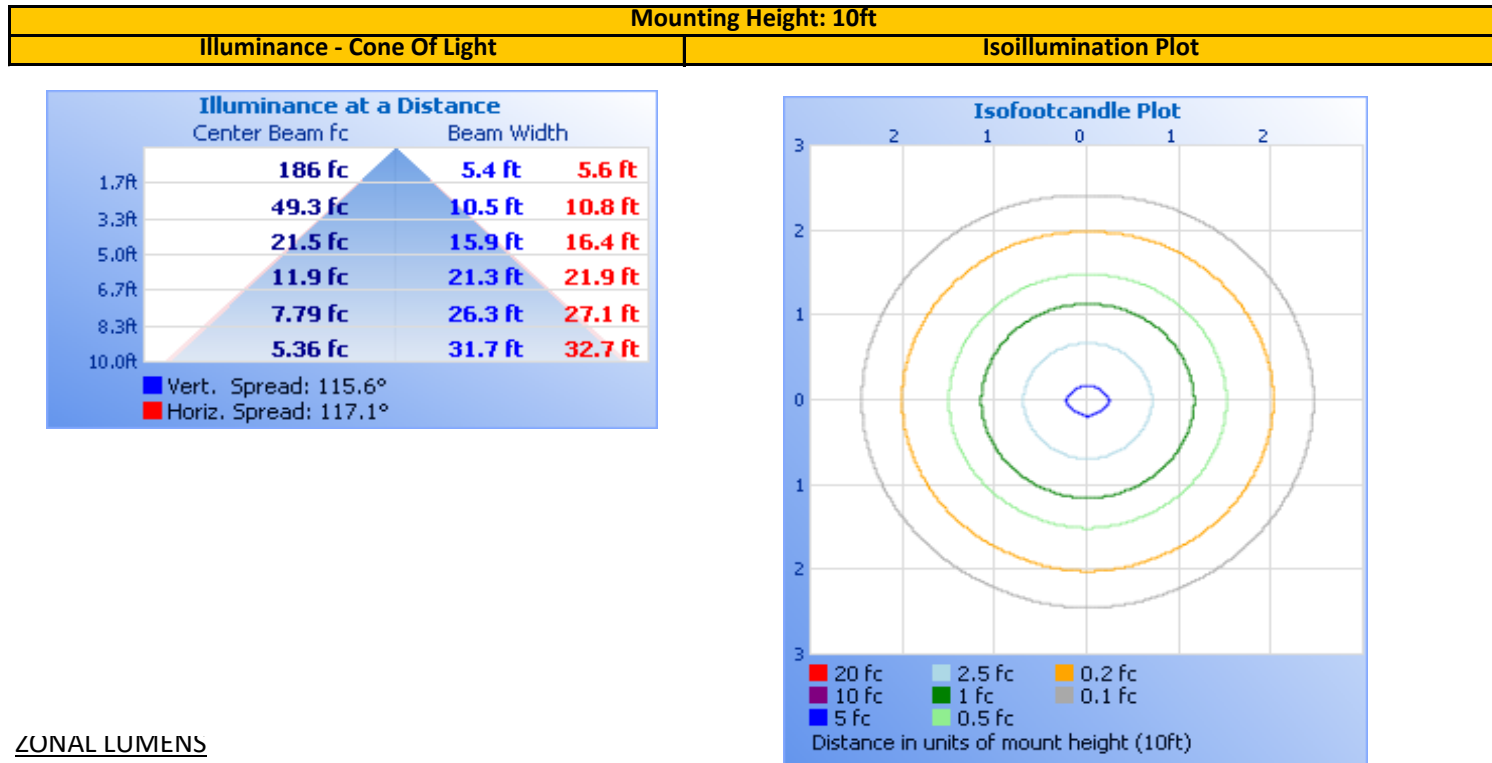

ZONAL LUMENS

Zonal Lumen Summary					
Zone	Lumens	Luminaire	Zone	Lumens	Total
0-30	422.9	26.2%	0-10	50.9	3.1%
0-40	699.4	43.3%	10-20	146.7	9.1%
0-60	1,262.6	78.1%	20-30	225.3	13.9%
60-90	354.4	21.9%	30-40	276.5	17.1%
70-100	146.6	9.1%	40-50	293.0	18.1%
90-120	0.0	0.0%	50-60	270.2	16.7%
0-90	1,616.9	100.0%	60-70	207.8	12.9%
90-180	0.0	0.0%	70-80	116.8	7.2%
0-180	1,616.9	100.0%	80-90	29.8	1.8%
			90-100	0.0	0.0%
			100-110	0.0	0.0%
			110-120	0.0	0.0%
			120-130	0.0	0.0%
			130-140	0.0	0.0%
			140-150	0.0	0.0%
			150-160	0.0	0.0%
			160-170	0.0	0.0%
			170-180	0.0	0.0%

INTEGRATING SPHERE TESTING

REPORT NO. 104797632CHI-016

Test Configuration	Tested Model No.	Pass/Fail/NA
1	ST5A-24V-3-2K6K	NA

PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation
Up

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (l)	Input ATHD (%)
120.00	133.9	15.74	0.979	14.41

Measured at 120(Vac)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra (l)	CRI - R9 (l)
1571.5	99.8	6357	91.5	62.9

Duv (l)	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
0.0018	0.315	0.329	0.200	0.469

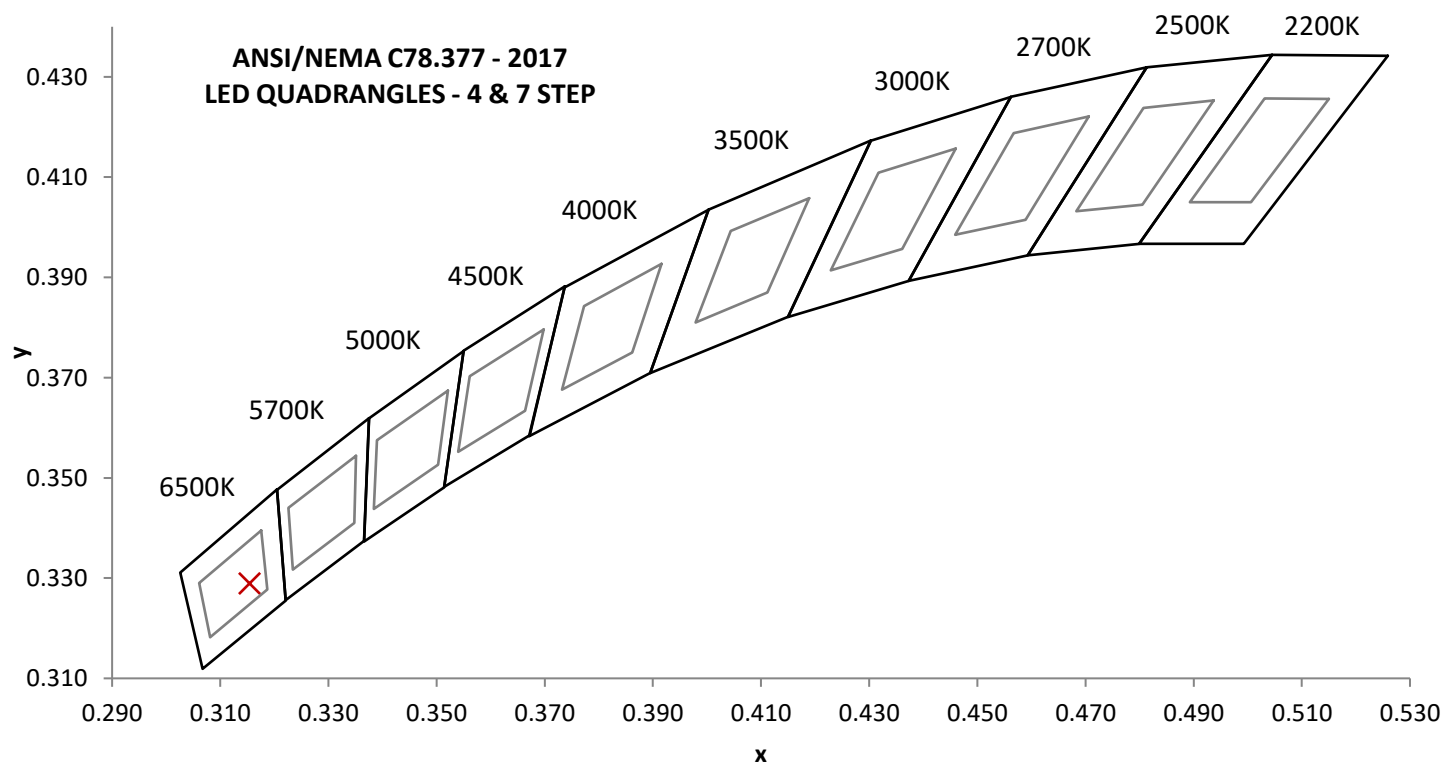


REPORT NO. 104797632CHI-016

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm		nm	mW/nm		nm	mW/nm		nm	mW/nm
350	0.2		460	31.0		570	20.7		680	7.9
355	0.3		465	26.4		575	20.4		685	7.1
360	0.2		470	21.2		580	20.0		690	6.4
365	0.2		475	15.5		585	19.6		695	5.7
370	0.2		480	14.3		590	19.3		700	5.0
375	0.2		485	14.3		595	19.0		705	4.4
380	0.3		490	14.6		600	18.7		710	3.9
385	0.3		495	15.6		605	18.3		715	3.4
390	0.4		500	17.0		610	18.0		720	3.0
395	0.5		505	18.1		615	17.6		725	2.6
400	0.6		510	19.0		620	17.2		730	2.2
405	0.7		515	19.7		625	16.7		735	1.9
410	0.8		520	20.3		630	16.2		740	1.7
415	1.0		525	20.7		635	15.5		745	1.4
420	1.5		530	21.1		640	14.8		750	1.2
425	2.4		535	21.3		645	14.0		755	1.1
430	4.3		540	21.4		650	13.2		760	0.9
435	7.9		545	21.5		655	12.4		765	0.8
440	14.5		550	21.5		660	11.4		770	0.7
445	29.0		555	21.5		665	10.5		775	0.6
450	49.4		560	21.3		670	9.6		780	0.5
455	45.9		565	21.0		675	8.8		---	---

Without correction of sample absorption.

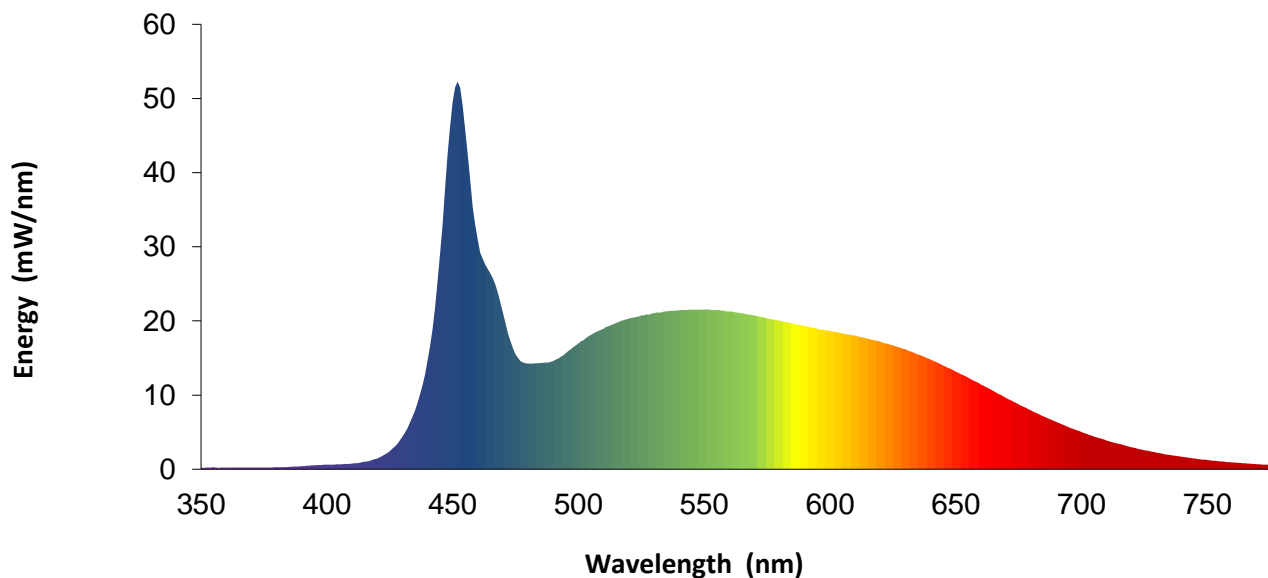

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

EQUIPMENT LIST

REPORT NO. 104797632CHI-016

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT310E	CHI0664	3/30/2022	3/30/2023
2	Omega Thermometer	DPI8-C24	146920	10/4/2021	10/4/2022
3	LSI High Speed Mirror Goniometer	6440T	146928	VBU	VBU
4	Newport Thermohygrometer	iServer	CHI0452	2/3/2022	2/3/2023
5	Chroma Power Supply	61604	CHI0371	VBU	VBU
8	Newport Humidity Recorder	iServer	146961	9/21/2021	9/21/2022
9	Labsphere Spectroradiometer	CDS2600	CHI0539	VBU	VBU
10	3 Meter Sphere	SPR600	CHI0088	VBU	VBU
11	Elgar AC Power Supply	CW1251	146112	VBU	VBU
12	Sorenson DC Power Supply	XFR150-8	146846	VBU	VBU
13	Yokogawa Power Meter	WT1600	146767	4/4/2022	4/4/2023
17	Omega thermometer	USB TC08	EQA002615	4/5/2022	4/5/2023
26	Xitron Power Analyzer	XT-2640	CHI0611	6/9/2021	6/9/2022

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---

Test Configuration	Tested Model No.	Pass/Fail/NA
1	ST5A-24V-3-2K6K	NA







ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: Pure Edge Lighting

Date: 5/18/2022

Model: ST5A-24V-3-2K6K

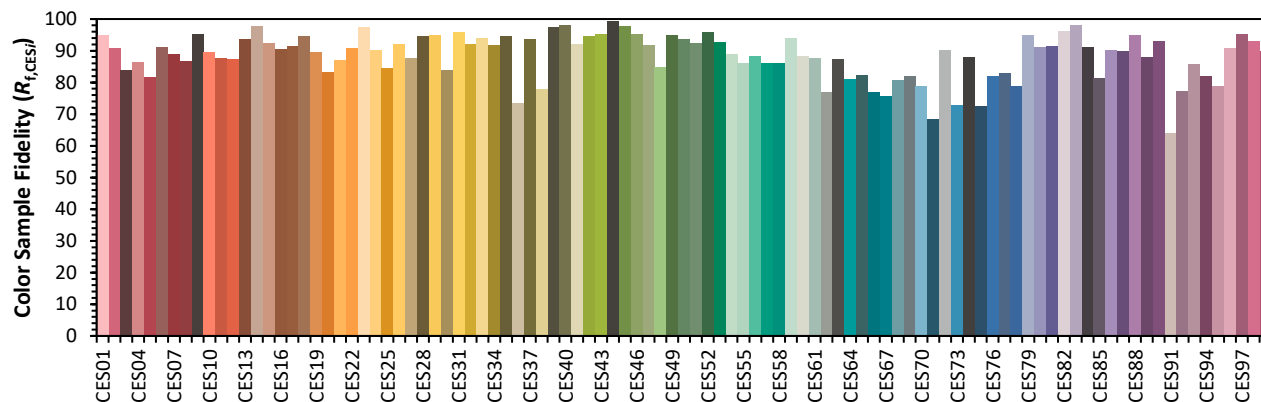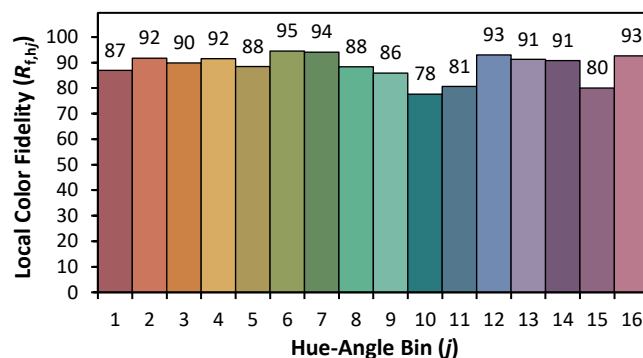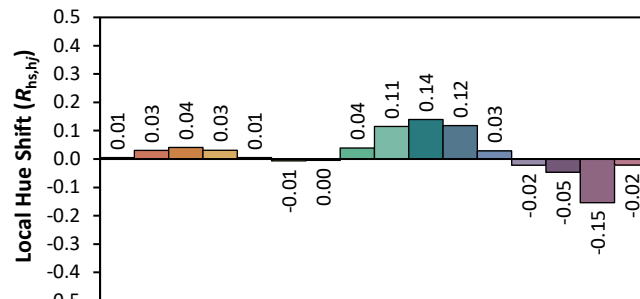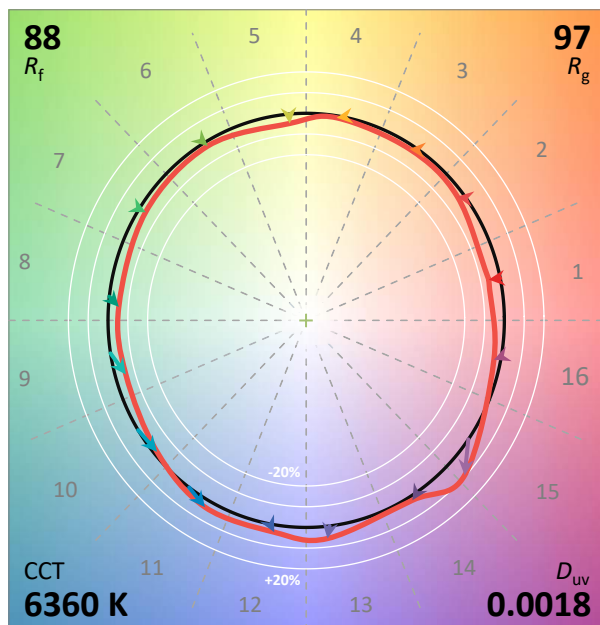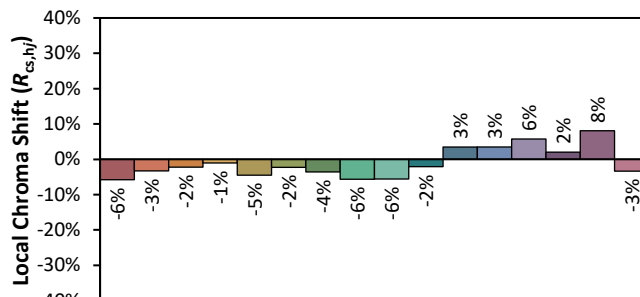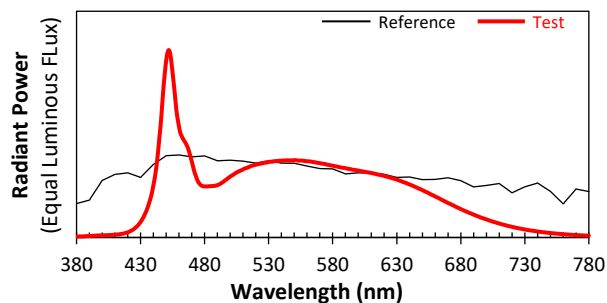

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

 x 0.3154 y 0.3288 u' 0.1998 v' 0.4686