




T-300-24

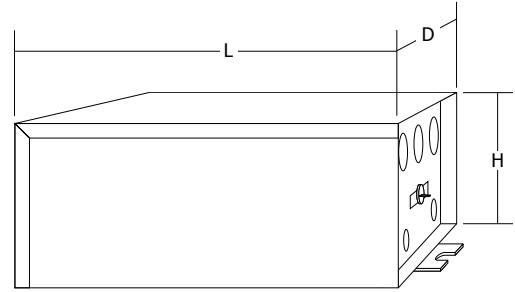

Description:

The 300 Watt 24 Volt Magnetic Remote Mount Transformer convert line voltage into 24 volt power and are protected by fast-acting circuit breakers. The safe-to-touch low voltage output powers Monorail systems up to 300 watts using 24 volt lamps.

Power Input:

- 120 volts AC 2.5 Amp
- 230 volt AC 1.3 Amp
- 277 volt AC 1.1 Amp

Power Output:

24 volts AC 300 watt 12.5 Amp

Installation:

Remote magnetic transformers must be installed in an accessible location, such as an attic or in a closet, up to 20 feet from the power feed canopy. Plug in version available.

Dimming:

600 Watt Magnetic Low Voltage Dimmer. Compatible dimmers are connected on the line voltage side of transformers. Some buzzing may occur at low levels and may be reduced with a de-buzzing coil.

Dimensions:

8.75"(L) x 4.4"(D) x 3.8"(H)
(22.2cm x 11.2cm x 9.7cm)


Weight:

8.41 lb (3.81 kg)

Ordering Code:

T	-	300-24	-	Standard 120V (leave blank)
T Remote Transformer		300-24 300 Watt 24 Volt		2 230V 50Hz 3 277V 60Hz P Plug-In

Compatible Power Feed Canopies					
<input type="checkbox"/>		MP Monorail Power Feed	4RD 4" Round Canopy	1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP Monorail Power Feed	4RD 4" Round Canopy	A 12" (3.7m) Adjustable Cable	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP Monorail Power Feed	4RD 4" Round Canopy	FE Feed End Wall	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP Monorail Power Feed	4RD 4" Round Canopy	ME Adjustable Monorail Feed End	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP Monorail Power Feed	2SQ 2" Square Canopy J-Box Included	1 1" (2.5cm)	SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP Monorail Power Feed	2SQ 2" Square Canopy J-Box Included	FE Feed End Wall	SN Satin Nickel PN Polished Nickel BZ Antique Bronze

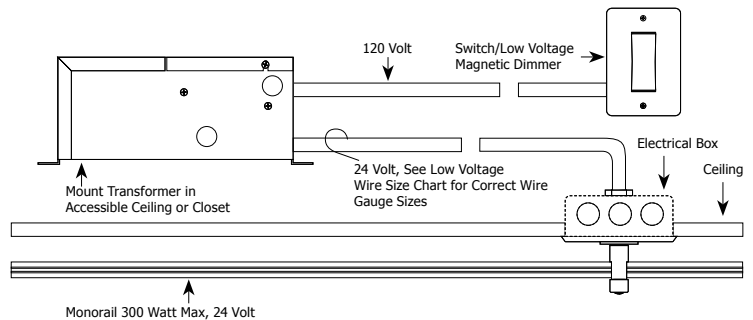

Low Voltage Feed Wire Size Chart

To determine the correct THHN wire sizes for a recommended 3% or less drop in voltage for each circuit based on the specified wattage. Lengths are the distance from the remote transformer to the system power feed connector, or power supply.

24 VOLT	5 ft.	6-15 ft.	16-20 ft.	21-40 ft.
300 watt	#12 GA	#12 GA	#10 GA	#6 GA