



300W/12V RECESSED IN WALL TRANSFORMER

MONORAIL 12V
300W
SINGLE FEED

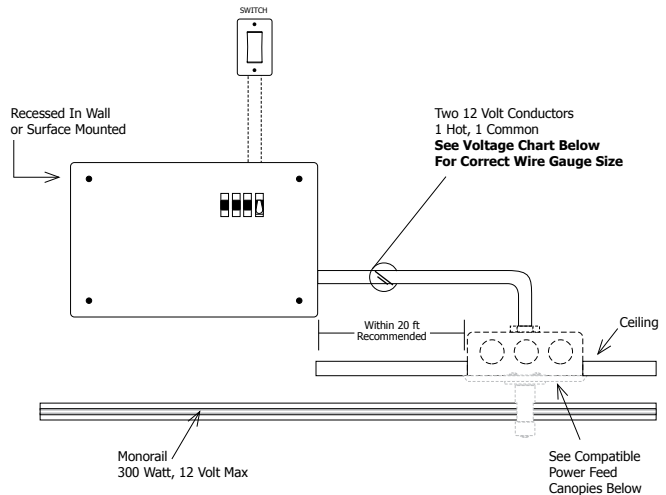

TR-300-12

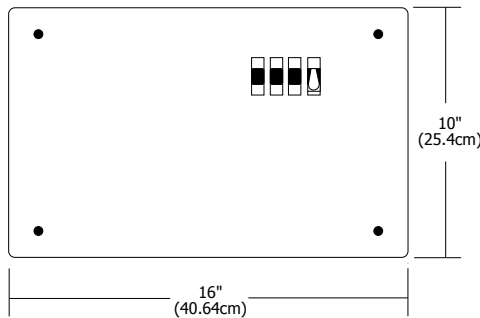

LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

12 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
300 Watt	#10 GA	#6 GA	#4 GA	#1 GA

Single-Feed Recessed In Wall Transformer 300W 12V Magnetic

Remote recessed single feed 300 watt magnetic transformer converts line voltage to 12 volt output. Fast acting circuit breaker on the 12 volt side will shut the system off in case of overload or short and can easily be reset. Can be recessed in the wall or surface mounted. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimming:

With 600 watt low voltage magnetic dimmer

Mounting Requirements:

Must be in accessible location

Weight:

16 lb (7.25 kg)

Ordering Code

TR -
 300 -
 12 -
 Standard 120V (leave blank)

TR Transformer Recessed
 300 300 Watt
 12 12 Volt
 P Plug-In
2 230V 50Hz
3 277V 60Hz

Compatible Power Feed Canopies				
<input type="checkbox"/>		MP - 4RD MP Monorail Power Feed 4" Round Canopy	1 1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP - 4RD MP Monorail Power Feed 4" Round Canopy	A A 12' (3.7m) Adjustable Cable	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP - 4RD MP Monorail Power Feed 4" Round Canopy	FE FE Feed End Wall	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP - 4RD MP Monorail Power Feed 4" Round Canopy	ME ME Adjustable Monorail Feed End	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP - 2SQ MP Monorail Power Feed 2" Square Canopy J-Box Included	1 1 1" (2.5cm)	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
<input type="checkbox"/>		MP - 2SQ MP Monorail Power Feed 2" Square Canopy J-Box Included	FE FE Feed End Wall	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze