



# FLEX STRIP LAMPS & LAMP ACCESSORIES




ETL/CSA/CE Listed.  
Designed to  
conform with  
UL2108 and  
NEC411 codes

NAME	ORDERING CODE	FINISH	DESCRIPTION
FS MR8/11	<b>FSMR8</b>	WHITE	Adapts 20W-30W MR8/11 lamp to the Festoon's socket.
FS MR16 HOLDER	<b>FSMR16</b>	WHITE	Adapts MR16 lamp up to 50W to the Festoon's socket. Adjustable lamp angle up to 120 degrees. *Lamps not included.


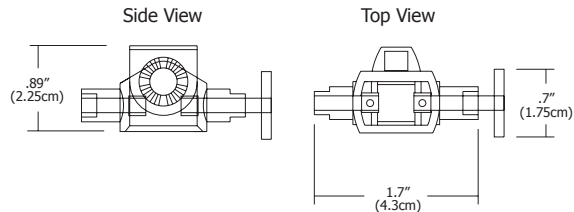


MR8/11

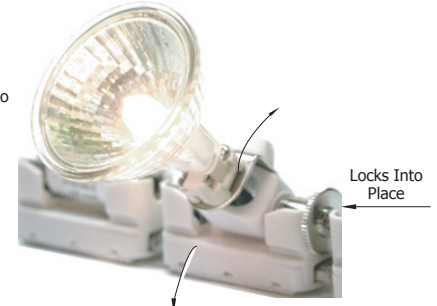

MR16

FS SIDE SOCKET	<b>FSSS</b>	WHITE	Adapts 20W Bi-Pin lamp to the Festoon's socket. Reflector keeps light in one direction at chosen angle. Good for under cabinets and in display cabinets. *Lamps not included.
----------------	-------------	-------	--

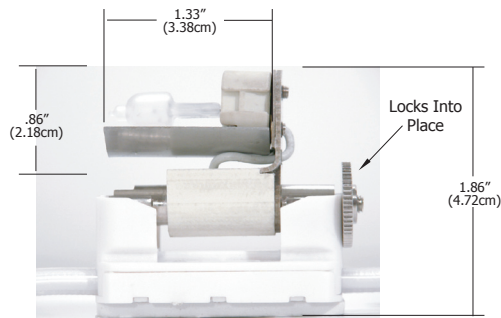

## XENON FESTOON LAMP



Actual Size

All Xenon Festoon (XF) lamps are frosted and offer long incandescent lamp life. Lamp spacing is 2.25" (5.75cm) on center with 5.3 sockets per foot.

- 5W has 20,000 hr lamp life. 3W has 10,000 hr. CRI 100.
- May be used with a magnetic or electronic transformer.
- **24 volt system advantage:** Allows length of strip to be twice as long before refeeding and still conform with UL1598 and NEC411 codes.

## Maximum Length Chart (Maximum Single Amp Circuit Run Before Refeeding)

Lamp Code	Volts/Watts	Color	Foot Candles*	Watts per Ft.	Lamp Life Hrs.	Max Length 25 Amp LV Circuit	Max Total Watts
<b>XF12V3W</b>	12V 3W	2800K	48 fc	16	10,000	18 ft 10 in (574.04cm)	300W
<b>XF12V5W</b>	12V 5W	2800K	70 fc	26.5	20,000	11 ft 4 in (345.44cm)	300W
<b>XF24V3W</b>	24V 3W	2800K	40 fc	16	10,000	37 ft 8 in (1148.08cm)	600W
<b>XF24V5W</b>	24V 5W	2800K	70 fc	26.5	20,000	22 ft 8 in (690.88cm)	600W

\*Foot Candle readings are from 12" (30.48cm) of Flex Strip with 5 lamps, 6" (15.24cm) away from meter

COMPANY:	FIXTURE TYPE:	DATE:
PROJECT:	CONSULTANT:	APPROVED BY: