

600W/24V SURFACE MOUNT MAGNETIC TRANSFORMER

MONORAIL 24V
SINGLE FEED 600W
MAGNETIC




Patent Pending



MT-600-24-SN shown



MT-600-24-P12-SN shown

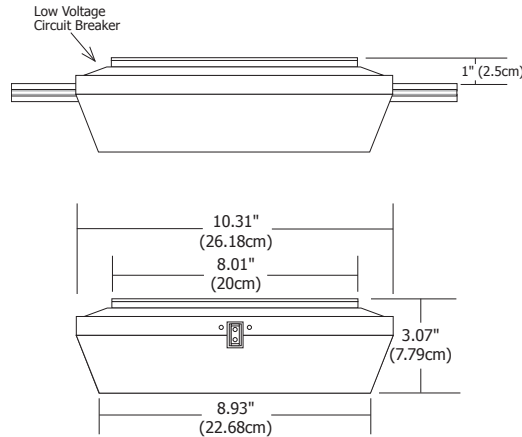

Single-Feed Surface Mount 600 Watt Magnetic Transformer

Monorail single-feed surface mount 600 watt magnetic transformer converts line voltage to 24 volts. The decorative transformer mounts to a standard 4" square electrical box with round plaster ring or octagon electrical box (not included). Standard side feeding transformer allows Monorail to be mounted 1" from the ceiling. Extended rigid stem, field cuttable versions available up to 96". Protected by fast acting 12 volt circuit breaker.

Dimming:

With 1000 watt low voltage magnetic dimmer

General Requirements:

1" Standoff is used with the surface mount transformer when it is not extended. Use the proper standoff size when extending surface mount transformer. Extendable 6" to 96" (15.2cm-243.8cm).

Transformer:

Maximum 600 watt, 24 volt load; 24 volt lamps must be used

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

20 lb (9.1 kg)

System	Power Type	Output Type	Finish	Input Type
MT	600	24	SN	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 300 Watt	24 24 Volt Single Feed	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

System	Power Type	Output Type	Length	Finish	Input Type
MT	600	24	P6	SN	Standard 120 Volt (leave blank)
MT Monorail Surface Mount Magnetic Transformer	600 600 Watt	24 24 Volt Single Feed	P6 6" (15.2cm) P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length	SN Satin Nickel PN Polished Nickel BZ Antique Bronze	2 230 Volt

PROJECT:

FIXTURE
TYPE:

DATE: