






Patent Pending



MT-600-D12-SN shown

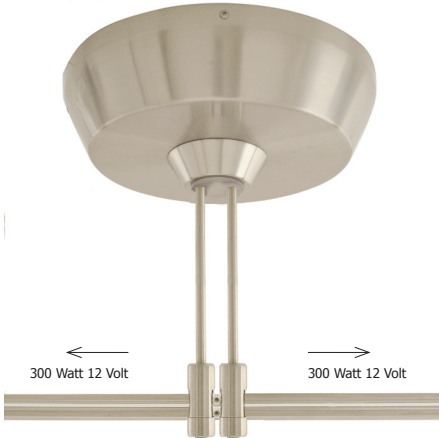

MT-600-D12-P12-SN shown

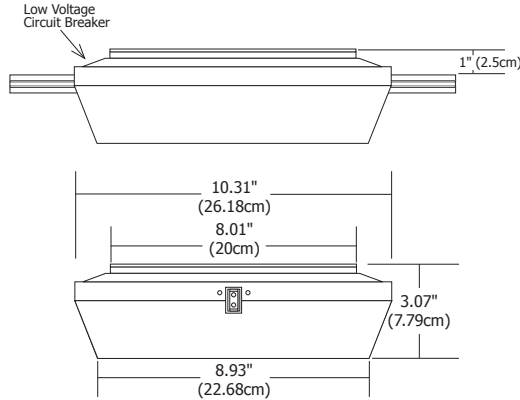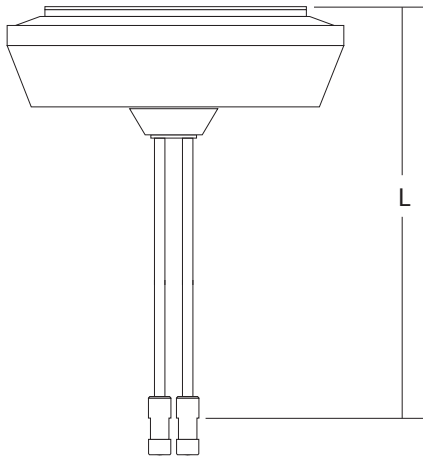

Dual-Feed Surface Mount 600 Watt Magnetic Transformer

Monorail dual-feed surface mount 600 watt magnetic transformer converts line voltage to two 300 watt 12 volts circuits. Isolating connectors are included to isolate the two power feeds. The decorative transformer mounts to a standard 4" square electrical box with round plaster ring or octagon electrical box (not included). Standard side feeding transformer allows Monorail to be mounted 1" from the ceiling. Extended rigid stem, field cuttable versions available up to 96". Protected by fast acting 12 volt circuit breaker.

Dimming:

With 1000 watt low voltage magnetic dimmer

General Requirements:

1" Standoff is used with the surface mount transformer when it is not extended. Use the proper standoff size when extending surface mount transformer. Extendable 6" to 96" (15.2cm-243.8cm).

Transformer:

Maximum 300 watt load per feed at 12 volt side of transformer.

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

20 lb (9.1 kg)

System	Power Type	Output Type	Finish	Input Type
MT	600	D12	SN	Standard 120 Volt (leave blank)
<small>MT Monorail Surface Mount Magnetic Transformer</small>	<small>600 600 Watt</small>	<small>D12 12 Volt Dual Feed</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small>	<small>2 230 Volt</small>

System	Power Type	Output Type	Length	Finish	Input Type
MT	600	D12	P6	SN	Standard 120 Volt (leave blank)
<small>MT Monorail Surface Mount Magnetic Transformer</small>	<small>600 600 Watt</small>	<small>D12 12 Volt Dual Feed</small>	<small>P6 6" (15.2cm) P12 12" (30.5cm) P24 24" (61cm) P36 36" (91.4cm) P48 48" (122cm) P96 96" (243.8cm) P_ Custom Length</small>	<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small>	<small>2 230 Volt</small>

PROJECT:

FIXTURE
TYPE:

DATE: