


175W/12V ELECTRONIC REMOTE TRANSFORMER

TRANSFORMER 12V 175W
SINGLE FEED
ELECTRONIC

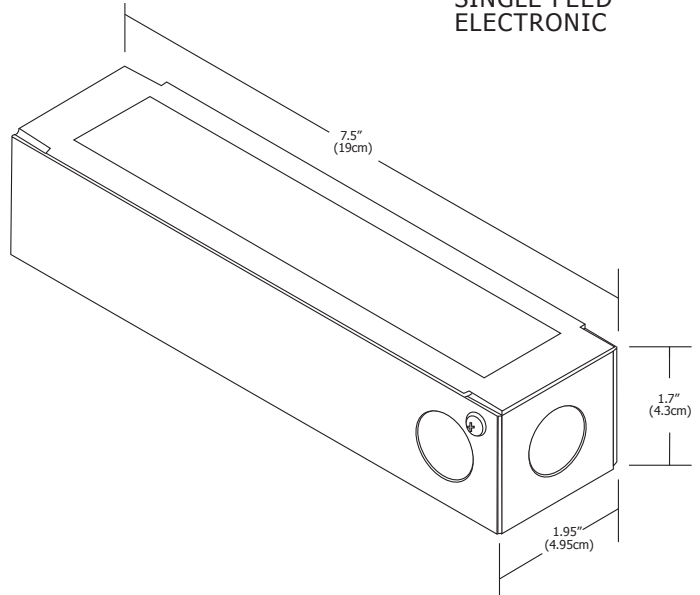

LOW VOLTAGE WIRE SIZE CHART

Use to decide the correct copper wire size for a recommended 3 percent voltage drop. The length shown is the length of wire from the transformer to the power feed canopy/J-Box.

12 Volt	5 ft. (1.5m)	6-15 ft. (1.8-4.6m)	16-20 ft. (4.9-6.1m)	21-40 ft. (6.4-12.2m)
175 Watt	#10 GA	#8 GA	#6 GA	#4 GA

Remote Transformer 175W 12V Electronic

Remote single feed 175 watt electronic transformer converts standard 120 volt line voltage to 12 volts. To be mounted in an accessible location. Consult Low Voltage Wire Size Chart for proper gauge wire to be used between remote transformer and power feed. Power feed or power feed canopy required, sold separately.

Dimming:

With 300 watt low voltage electronic dimmer
*LEDs are not dimmable with this transformer

Mounting Requirements:

Must be in accessible location

Weight:

.8 lb (.36 kg)

Ordering Code

TE	-	175	-	12	-	Standard 120V (leave blank)
TE Transformer Electronic		175 175 Watt		12 12 Volt		P Plug In

Compatible Power Feed Canopies

	MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	1 1 1" (2.5cm) 6 6" (15.2) 12 12" (30.5cm) 24 24" (61cm) 36 36" (91.4cm) 48 48" (122cm) 96 96" (243.8cm)	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	A A 12' (3.7m) Adjustable Cable	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	FE FE Feed End Wall	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP MP Monorail Power Feed	-	4RD 4" Round Canopy	-	ME ME Adjustable Monorail Feed End	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP MP Monorail Power Feed	-	2SQ 2" Square Canopy J-Box Included	-	1 1 1" (2.5cm)	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze
	MP MP Monorail Power Feed	-	2SQ 2" Square Canopy J-Box Included	-	FE FE Feed End Wall	-	SN SN Satin Nickel PN Polished Nickel BZ Antique Bronze

PROJECT:

FIXTURE
TYPE:

DATE: