

PURE EDGE LIGHTING

TEST REPORT

SCOPE OF WORK

LED Performance Testing

MODEL NUMBER

TUBS-SP-30K-WH

PROJECT NUMBER

G104430061

REPORT NUMBER

104430061CHI-003

ISSUE DATE

3/10/2021

REVISED DATE

None

TEST DATES

02/25/2021 through 03/03/2021.

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



REPORT NUMBER

104430061CHI-003

MODEL NUMBER(s)

TUBS-SP-30K-WH

REPORT RENDERED TO:

PURE EDGE LIGHTING
1718 WEST FULLERTON AVE
CHICAGO
USA

STATEMENT OF LIMITATION

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01100816-1.

TEST STANDARDS

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

IES TM-30-18: IES Method for Evaluating Light Source Color Rendition

In Charge of Testing:



Ian Smith
Engineer
Lighting Division

Reviewer:



Jeff Davis
NA Technical Lead
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 104430061CHI-003



ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH02182021102128	TUBS-SP-30K-WH	LED ACCENT LIGHT	Prototype	2/18/2021

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	TUBS-SP-30K-WH	1

SAMPLE PHOTOS - TESTED CONFIGURATIONS

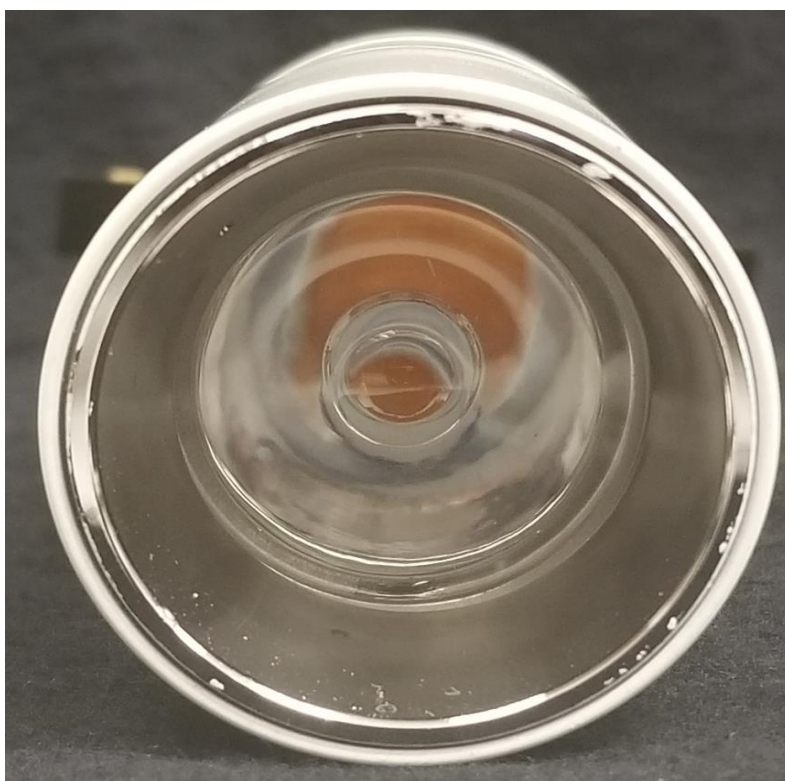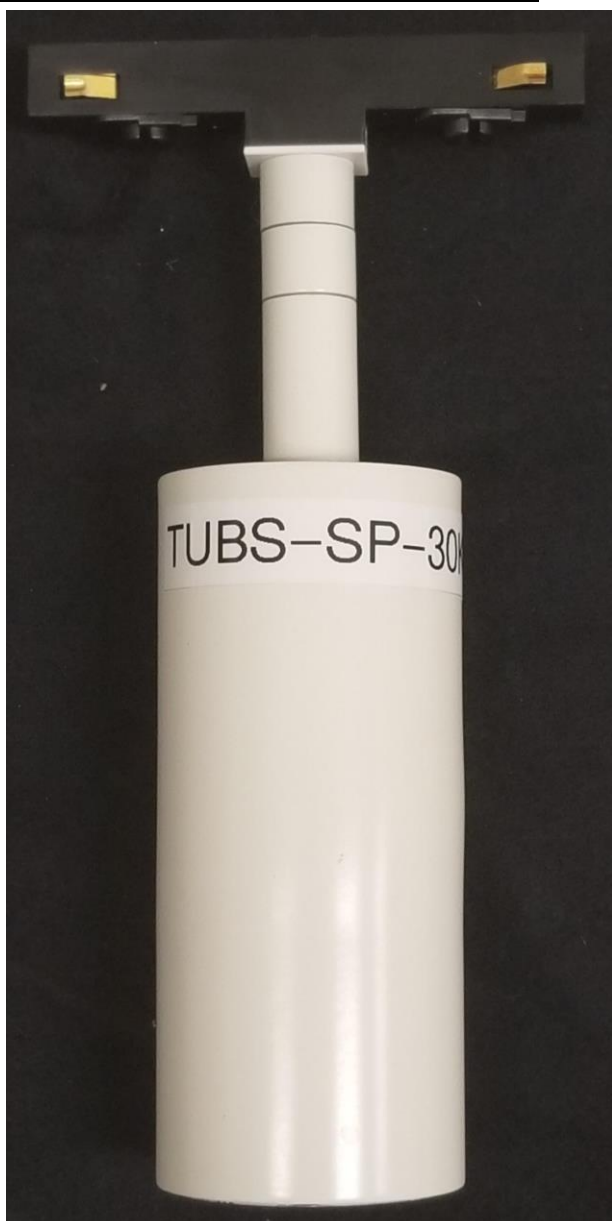

SUMMARY

REPORT NO. 104430061CHI-003

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	TUBS-SP-30K-WH
Product Description:	LED ACCENT LIGHT
LED Model No.:	LUMINUS/CXM-4-30-90-36-AC40-F5-3
Driver Model No.:	HUARI/DR-24V-1100-33D
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	633.2	642.6
Input Power (W) @ 120 (Vac)	11.16	11.14
Lumen Efficacy (lm/W)	56.7	57.7
Input Power Factor () @ 120 (Vac)	0.963	0.963

Criteria	Results
Input ATHD (%) @ 120 (Vac)	15.45
Correlated Color Temperature (K)	3020
Color Rendering Index - Ra ()	92.4
Color Rendering Index - R9 ()	62.6
Duv ()	0.0000
Chromaticity Coordinate (x)	0.435
Chromaticity Coordinate (y)	0.404
Chromaticity Coordinate (u')	0.250
Chromaticity Coordinate (v')	0.521

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 104430061CHI-003

Test Configuration	Tested Model No.	Pass/Fail/NA
1	TUBS-SP-30K-WH	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (I)
Up	120.00	96.6	11.16	0.963

Light Output (lm)	Lumen Efficacy (lm/W)
633.2	56.7

INTENSITY SUMMARY - CANDELA


Angle	0	22.5	45	67.5	90
0	6082	6082	6082	6082	6082
5	4653	4631	4627	4626	4671
10	2051	1999	1943	1897	1878
15	804	825	834	844	847
20	211	226	270	307	315
25	58	58	54	50	48
30	20	22	27	32	35
35	18	18	17	17	17
40	8	8	9	9	9
45	6	6	6	6	6
50	4	4	4	4	4
55	4	4	3	3	3
60	3	3	2	2	2
65	1	1	1	1	1
70	0	0	0	0	0
75	0	0	0	0	0
80	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0
95	0	0	0	0	0
100	0	0	0	0	0
105	0	0	0	0	0
110	0	0	0	0	0
115	0	0	0	0	0
120	0	0	0	0	0
125	0	0	0	0	0
130	0	0	0	0	0
135	0	0	0	0	0
140	0	0	0	0	0
145	0	0	0	0	0
150	0	0	0	0	0
155	0	0	0	0	0
160	0	0	0	0	0
165	0	0	0	0	0
170	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

Entire luminous intensity matrix found in .IES file

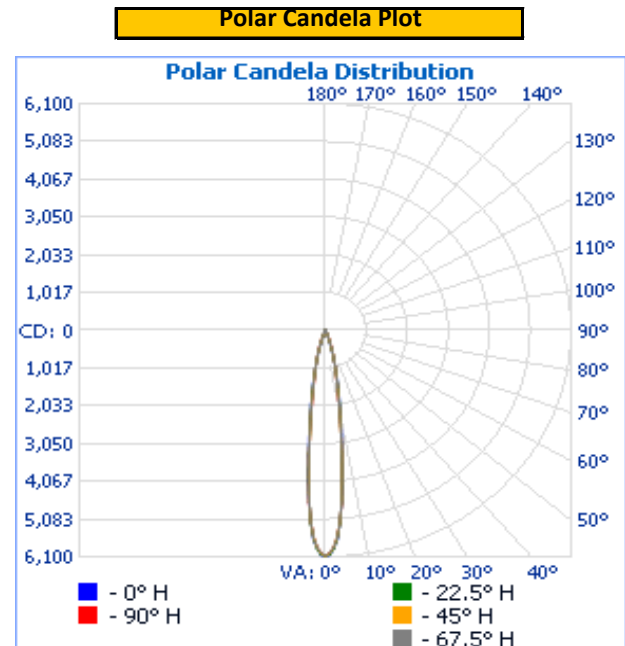

REPORT NO. 104430061CHI-003

ILLUMINANCE SUMMARY

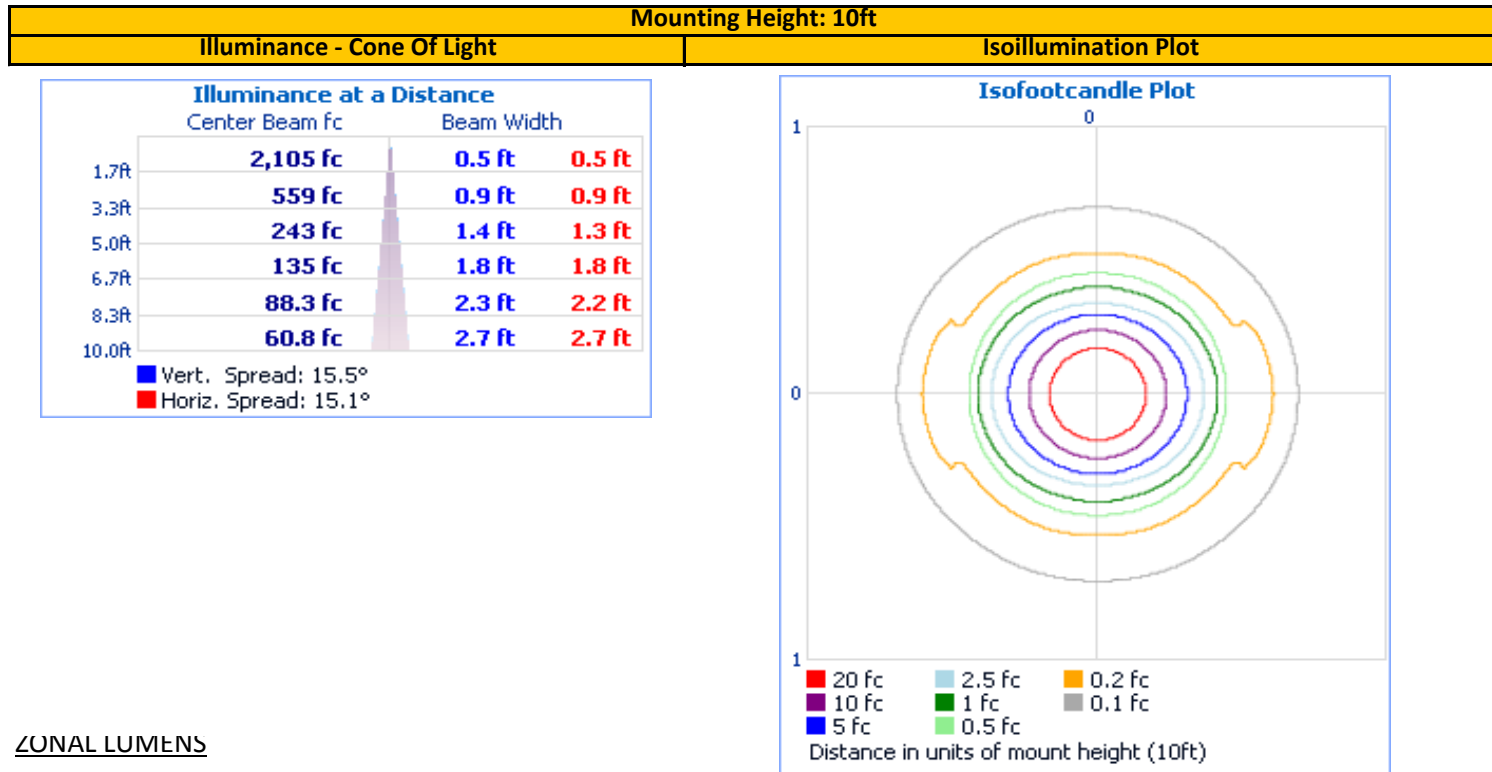

ZONAL LUMENS

Zonal Lumen Summary					
Zone	Lumens	Luminaire	Zone	Lumens	Total
0-30	613.3	96.8%	0-10	343.0	54.2%
0-40	624.2	98.6%	10-20	234.4	37.0%
0-60	631.6	99.8%	20-30	35.8	5.7%
60-90	1.6	0.2%	30-40	10.9	1.7%
70-100	0.4	0.1%	40-50	4.5	0.7%
90-120	0.0	0.0%	50-60	3.0	0.5%
0-90	633.2	100.0%	60-70	1.1	0.2%
90-180	0.0	0.0%	70-80	0.2	0.0%
0-180	633.2	100.0%	80-90	0.2	0.0%
			90-100	0.0	0.0%
			100-110	0.0	0.0%
			110-120	0.0	0.0%
			120-130	0.0	0.0%
			130-140	0.0	0.0%
			140-150	0.0	0.0%
			150-160	0.0	0.0%
			160-170	0.0	0.0%
			170-180	0.0	0.0%

INTEGRATING SPHERE TESTING

REPORT NO. 104430061CHI-003

Test Configuration	Tested Model No.	Pass/Fail/NA
1	TUBS-SP-30K-WH	NA

PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation
Up

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (l)	Input ATHD (%)
120.03	96.4	11.14	0.963	15.45

Measured at 120.03(Vac)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra (l)	CRI - R9 (l)
642.6	57.7	3020	92.4	62.6

Duv (l)	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
0.0000	0.435	0.404	0.250	0.521

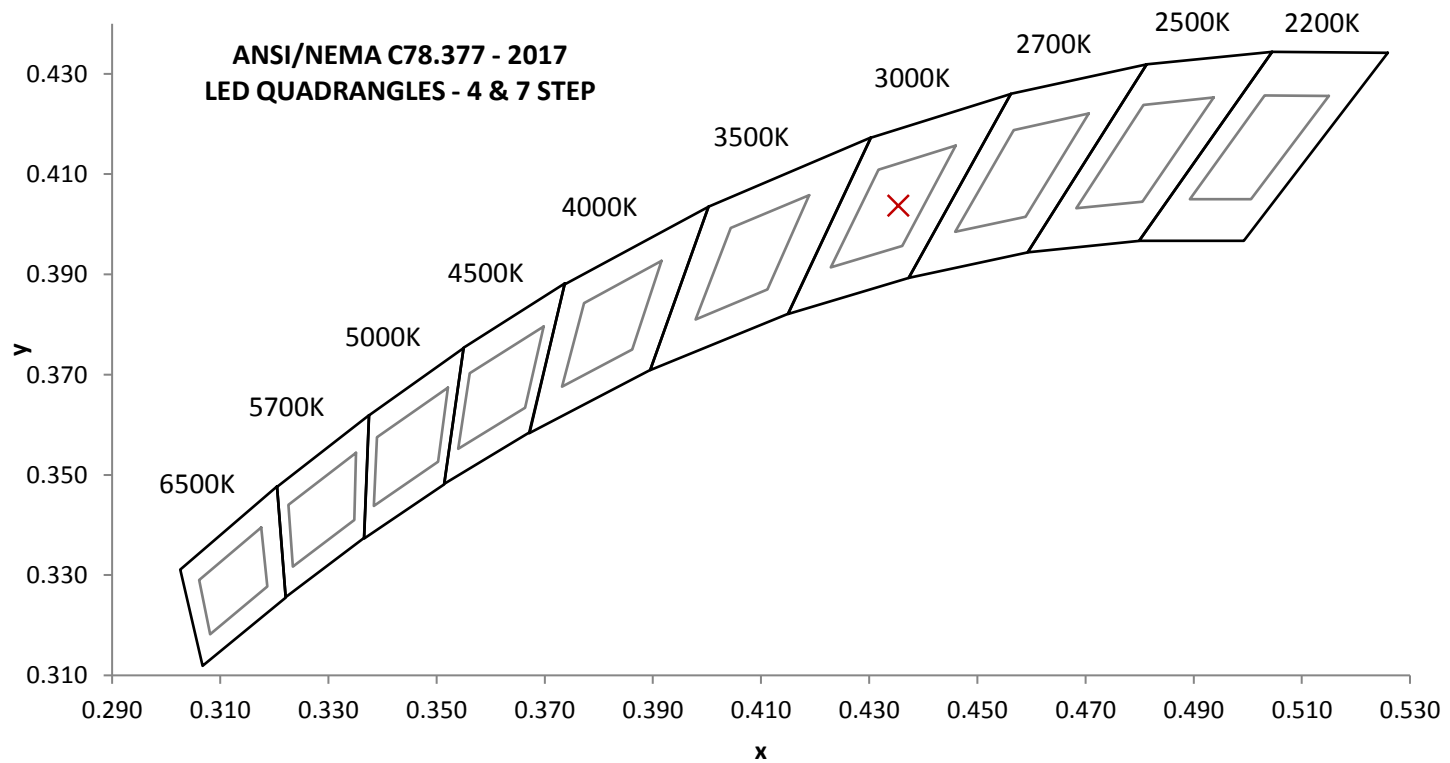


REPORT NO. 104430061CHI-003

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm		nm	mW/nm		nm	mW/nm		nm	mW/nm
350	0.1		460	3.7		570	8.3		680	6.1
355	0.1		465	3.0		575	8.6		685	5.5
360	0.1		470	2.6		580	8.9		690	4.9
365	0.1		475	2.2		585	9.2		695	4.4
370	0.1		480	2.2		590	9.5		700	3.9
375	0.1		485	2.5		595	9.9		705	3.4
380	0.1		490	3.0		600	10.2		710	3.0
385	0.1		495	3.6		605	10.5		715	2.7
390	0.1		500	4.2		610	10.8		720	2.3
395	0.1		505	4.7		615	11.0		725	2.0
400	0.1		510	5.1		620	11.1		730	1.7
405	0.1		515	5.5		625	11.1		735	1.5
410	0.2		520	5.8		630	11.0		740	1.3
415	0.4		525	6.1		635	10.8		745	1.1
420	0.7		530	6.3		640	10.5		750	1.0
425	1.1		535	6.6		645	10.1		755	0.8
430	1.5		540	6.9		650	9.7		760	0.7
435	2.2		545	7.1		655	9.2		765	0.6
440	3.0		550	7.4		660	8.6		770	0.5
445	4.2		555	7.6		665	8.0		775	0.5
450	5.3		560	7.9		670	7.3		780	0.4
455	5.0		565	8.1		675	6.7		---	---

Without correction of sample absorption.

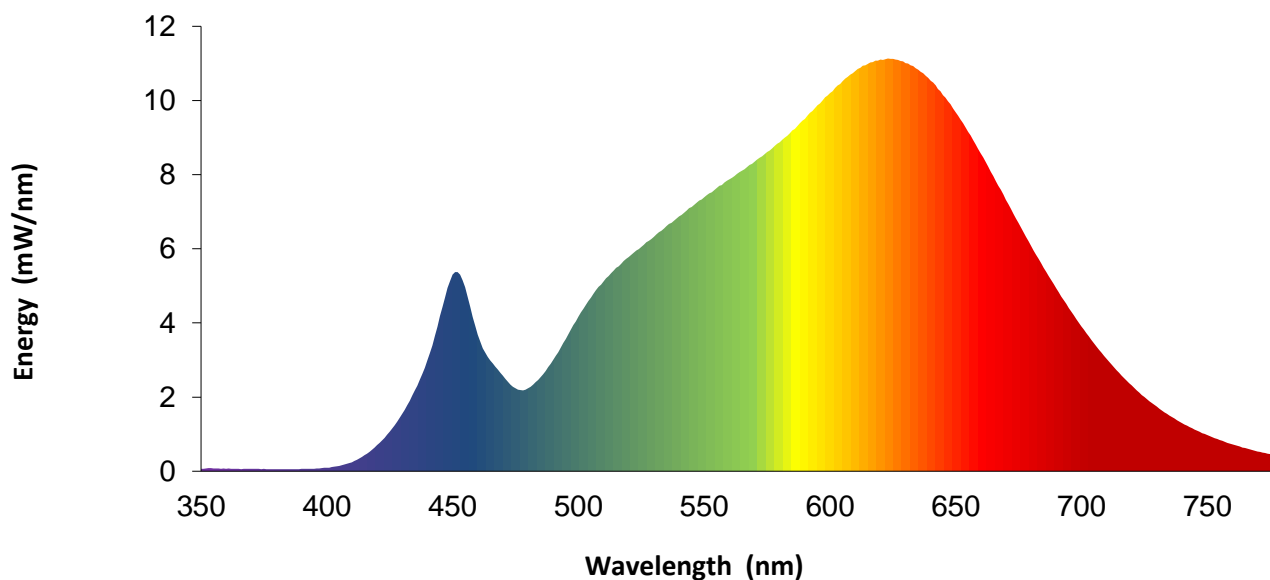

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

EQUIPMENT LIST

REPORT NO. 104430061CHI-003

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
2	Omega Thermometer	DPI8-C24	146920	10/1/2020	10/1/2021
3	LSI High Speed Mirror Goniometer	6440T	146928	VBUE	VBUE
4	Newport Thermohygrometer	iServer	146957	1/29/2021	1/29/2022
5	Pacific AC Power Supply	118-ACX	CHI0153	VBUE	VBUE
6	Newport Humidity Recorder	iServer	146961	9/3/2020	9/3/2021
7	Labsphere 2M Sphere & Spectroradiometer	CDS1100	146137	VBUE	VBUE
8	Elgar AC Power Supply	CW1251	146113	VBUE	VBUE
9	Sorenson DC Power Supply	XFR150-8	146847	VBUE	VBUE
10	Yokogawa Power Meter	WT1600	146767	4/6/2020	4/6/2021
11	Omega Thermometer	MDSi8	146873	7/1/2020	7/1/2021

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---

Test Configuration	Tested Model No.	Pass/Fail/NA
1	TUBS-SP-30K-WH	NA







ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: Pure Edge Lighting

Date: 3/3/2021

Model: TUBS-SP-30K-WH

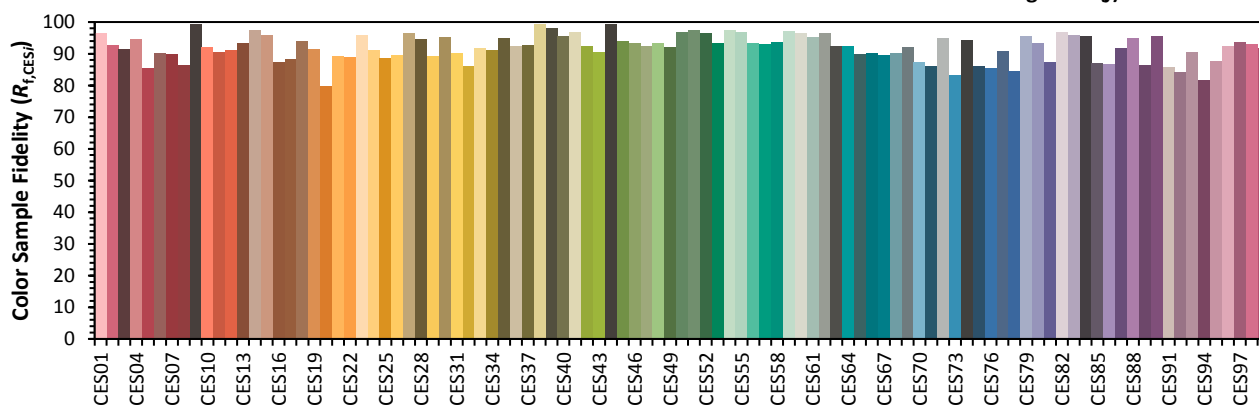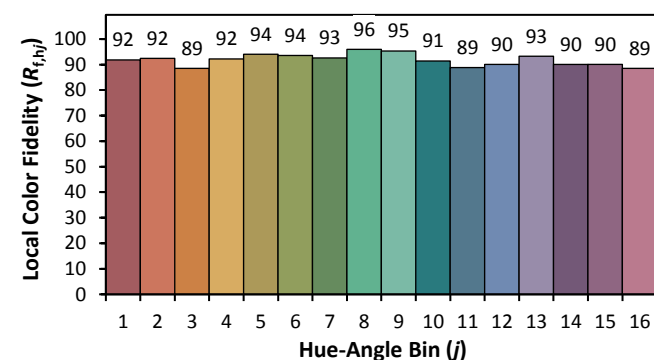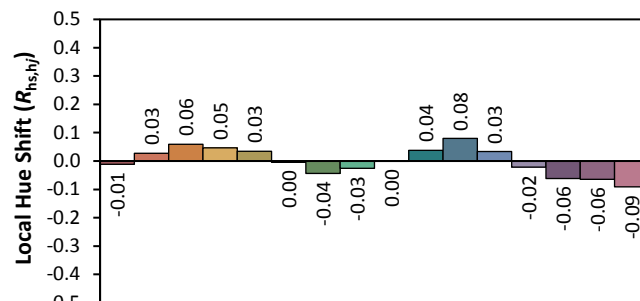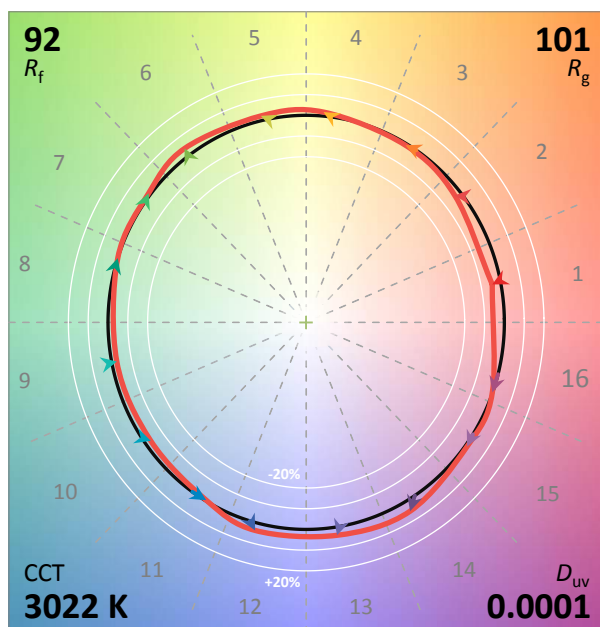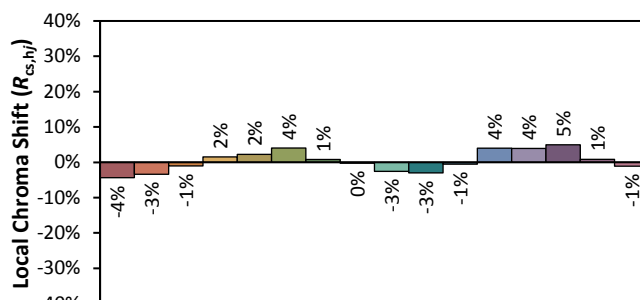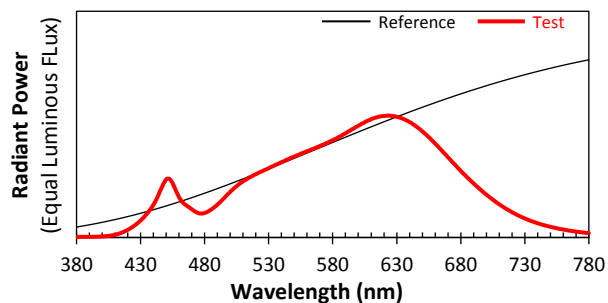

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

 x 0.4354 y 0.4037 u' 0.2498 v' 0.5210