

# PUREEDGE LIGHTING

## TEST REPORT

### SCOPE OF WORK

LED Performance Testing

### MODEL NUMBER

FJ24-ZOOM-ZZ1-30K-BK (Max Beam)

### PROJECT NUMBER

G104797632

### REPORT NUMBER

104797632CHI-004rev1

### ISSUE DATE

1/20/2022

### REVISED DATE

1/27/2022

### TEST DATES

2022-01-20.

### DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



**REPORT NUMBER**

104797632CHI-004rev1

**MODEL NUMBER(s)**

FJ24-ZOOM-ZZ1-30K-BK (MAX BEAM)

**REPORT RENDERED TO:**

PUREEDGE LIGHTING  
1718 W. FULLERTON AVE,  
CHICAGO, IL 60614  
USA

**STATEMENT OF LIMITATION**

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

**AUTHORIZATION**

The testing performed was authorized by signed quote number QU-0119885-0.

**TEST STANDARDS**

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI/IES LM-79-19 Optical and Electrical Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

IES TM-30-18: IES Method for Evaluating Light Source Color Rendition

In Charge of Testing:



Maximilian Carvajal  
Engineer  
Lighting Division

Reviewer:



Jeff Davis  
N.A. Technical Lead  
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## SAMPLE INFORMATION

REPORT NO. 104797632CHI-004REV1

### ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH01182022074347-002	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)	TRACK HEAD	Production	1/18/2022

### TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)	1

### SAMPLE PHOTOS - TESTED CONFIGURATIONS



## SUMMARY

REPORT NO. 104797632CHI-004REV1

### PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)
Product Description:	TRACK HEAD
LED Model No.:	LUMINUS/CXM-4-30-90-36-AC40-F5-3
Driver Model No.:	HUARI/DR-24V-2000-60D
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	883.8	873.6
Input Power (W) @ 120 (Vac)	18.20	18.16
Lumen Efficacy (lm/W)	48.6	48.1
Input Power Factor () @ 120 (Vac)	0.977	0.977

Criteria	Results
Input ATHD (%) @ 120 (Vac)	17.25
Correlated Color Temperature (K)	3128
Color Rendering Index - Ra ()	92.4
Color Rendering Index - R9 ()	61.2
Duv ()	-0.0014
Chromaticity Coordinate (x)	0.426
Chromaticity Coordinate (y)	0.397
Chromaticity Coordinate (u')	0.247
Chromaticity Coordinate (v')	0.517
Input Power (W) @ (Vac)	
Input Power Factor () @ (Vac)	
Input ATHD (%) @ (Vac)	

## TEST METHODS

### SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

### INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

### TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

**TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING**

**REPORT NO. 104797632CHI-004REV1**

Test Configuration	Tested Model No.	Pass/Fail/NA
1	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)	NA

**PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)**


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (I)
Up	120.02	155.3	18.20	0.977

Light Output (lm)	Lumen Efficacy (lm/W)
883.8	48.6

**INTENSITY SUMMARY - CANDELA**

Angle	0	22.5	45	67.5	90
0	1186.9	1186.9	1186.9	1186.9	1186.9
5	1170.4	1184	1181.2	1174.7	1173
10	1120.5	1135.2	1130.9	1129.2	1125.1
15	992.3	997.9	1000.9	997.9	993.1
20	844.9	842.3	843.3	843.8	839.9
25	702.4	688.8	686.6	683.5	682.7
30	501.6	489.7	485.7	483.7	480.9
35	283.4	271.2	269.2	271.2	270.6
40	101.2	89.3	89.4	88.4	91
45	18.9	18.4	18.4	17.9	17.9
50	5.5	5.1	4.9	4.7	4.6
55	2	1.7	1.5	1.5	1.5
60	0.8	0.7	0.6	0.6	0.6
65	0.4	0.3	0.3	0.3	0.3
70	0.3	0.2	0.2	0.2	0.2
75	0.2	0.2	0.2	0.2	0.2
80	0.1	0.1	0.1	0.1	0.1
85	0	0	0	0	0
90	0	0	0	0	0
95	0	0	0	0	0
100	0	0	0	0	0
105	0	0	0	0	0
110	0	0	0	0	0
115	0	0	0	0	0
120	0	0	0	0	0
125	0	0	0	0	0
130	0	0	0	0	0
135	0	0	0	0	0
140	0	0	0	0	0
145	0	0	0	0	0
150	0	0	0	0	0
155	0	0	0	0	0
160	0	0	0	0	0
165	0	0	0	0	0
170	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0



Entire luminous intensity matrix found in .IES file

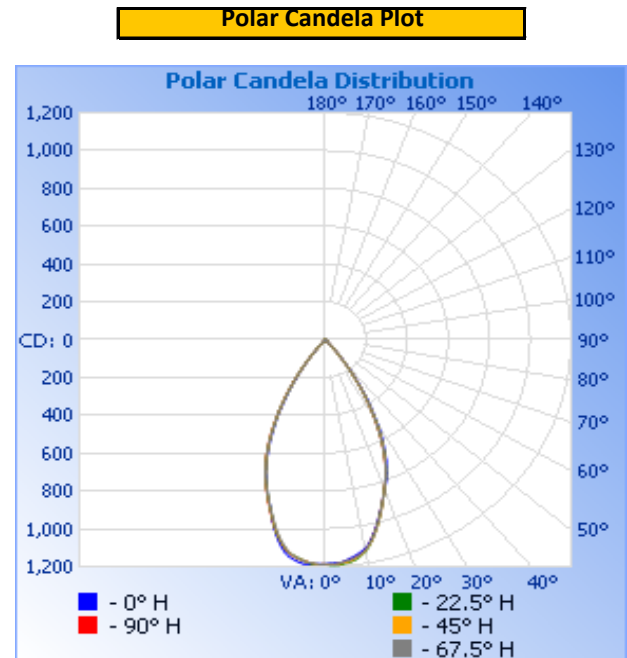

**REPORT NO. 104797632CHI-004REV1**

ILLUMINANCE SUMMARY

Mounting Height: 10ft	
Illuminance - Cone Of Light	Isoillumination Plot

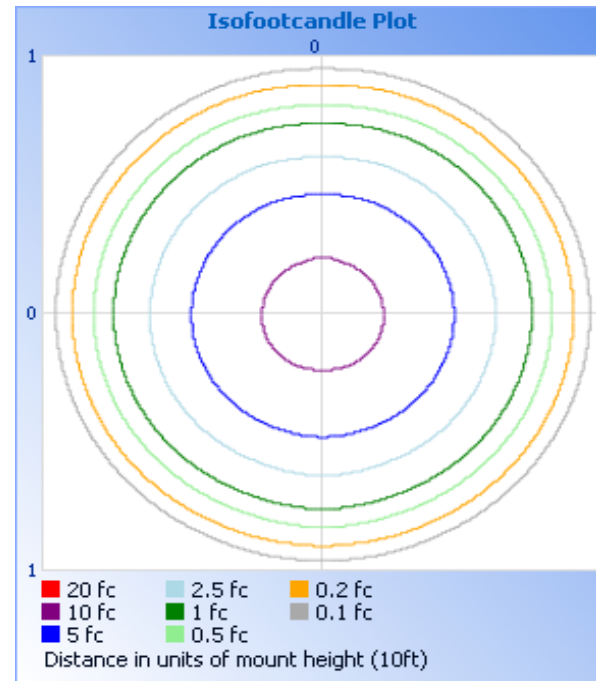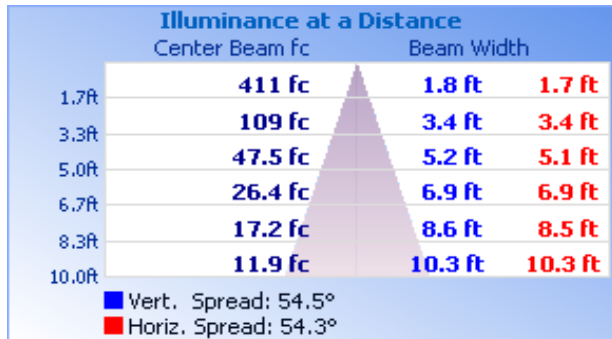

ZONAL LUMENS

**Zonal Lumen Summary**

Zone	Lumens	Luminaire
0-30	694.0	78.5%
0-40	860.9	97.4%
0-60	883.2	99.9%
60-90	0.6	0.1%
70-100	0.2	0.0%
90-120	0.0	0.0%
0-90	883.8	100.0%
90-180	0.0	0.0%
0-180	883.8	100.0%

Zone	Lumens	Total	Zone	Lumens	Total
0-10	110.8	12.5%	90-100	0.0	0.0%
10-20	276.0	31.2%	100-110	0.0	0.0%
20-30	307.2	34.8%	110-120	0.0	0.0%
30-40	166.9	18.9%	120-130	0.0	0.0%
40-50	20.5	2.3%	130-140	0.0	0.0%
50-60	1.8	0.2%	140-150	0.0	0.0%
60-70	0.4	0.0%	150-160	0.0	0.0%
70-80	0.2	0.0%	160-170	0.0	0.0%
80-90	0.0	0.0%	170-180	0.0	0.0%



**INTEGRATING SPHERE TESTING**

**REPORT NO. 104797632CHI-004REV1**

Test Configuration	Tested Model No.	Pass/Fail/NA
1	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)	NA

**PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)**


Base Orientation
Up

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor (I)	Input ATHD (%)
119.99	155.0	18.16	0.977	17.25

Measured at 119.99(Vac)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra (I)	CRI - R9 (I)
873.6	48.1	3128	92.4	61.2

Duv (I)	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
-0.0014	0.426	0.397	0.247	0.517

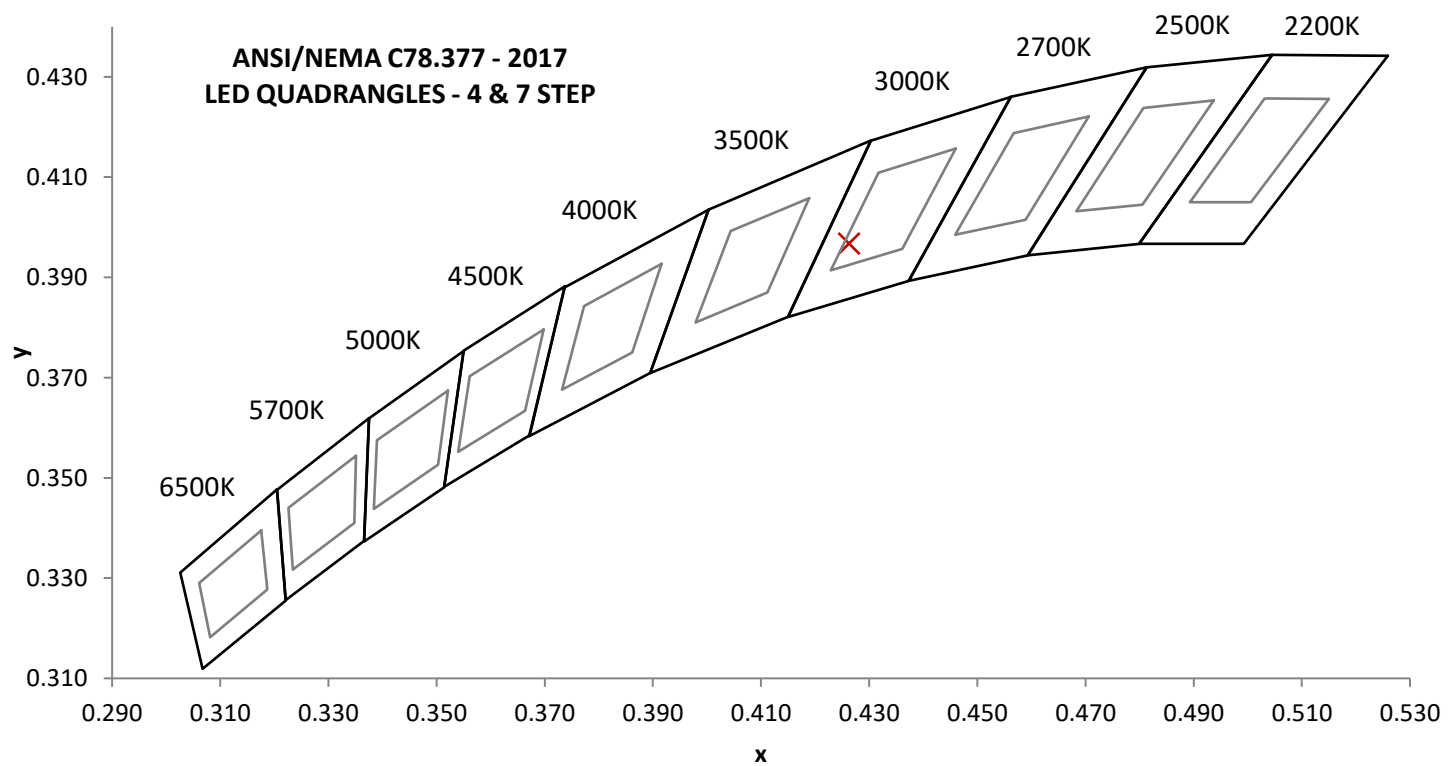


REPORT NO. 104797632CHI-004REV1

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm		nm	mW/nm		nm	mW/nm		nm	mW/nm
350	0.1		460	6.9		570	12.1		680	8.5
355	0.1		465	5.4		575	12.6		685	7.7
360	0.1		470	4.7		580	12.9		690	7.0
365	0.1		475	4.0		585	13.4		695	6.2
370	0.1		480	3.8		590	13.8		700	5.5
375	0.1		485	4.1		595	14.3		705	4.9
380	0.1		490	4.7		600	14.8		710	4.3
385	0.1		495	5.3		605	15.2		715	3.8
390	0.1		500	6.1		610	15.5		720	3.4
395	0.2		505	6.8		615	15.6		725	2.9
400	0.2		510	7.5		620	15.7		730	2.6
405	0.2		515	8.0		625	15.6		735	2.2
410	0.4		520	8.4		630	15.4		740	1.9
415	0.6		525	8.9		635	15.0		745	1.7
420	0.9		530	9.2		640	14.6		750	1.5
425	1.5		535	9.7		645	14.0		755	1.3
430	2.2		540	10.0		650	13.4		760	1.1
435	3.3		545	10.4		655	12.7		765	0.9
440	4.6		550	10.7		660	11.9		770	0.8
445	6.2		555	11.1		665	11.1		775	0.7
450	8.2		560	11.5		670	10.2		780	0.6
455	8.6		565	11.8		675	9.3		---	---

Without correction of sample absorption.

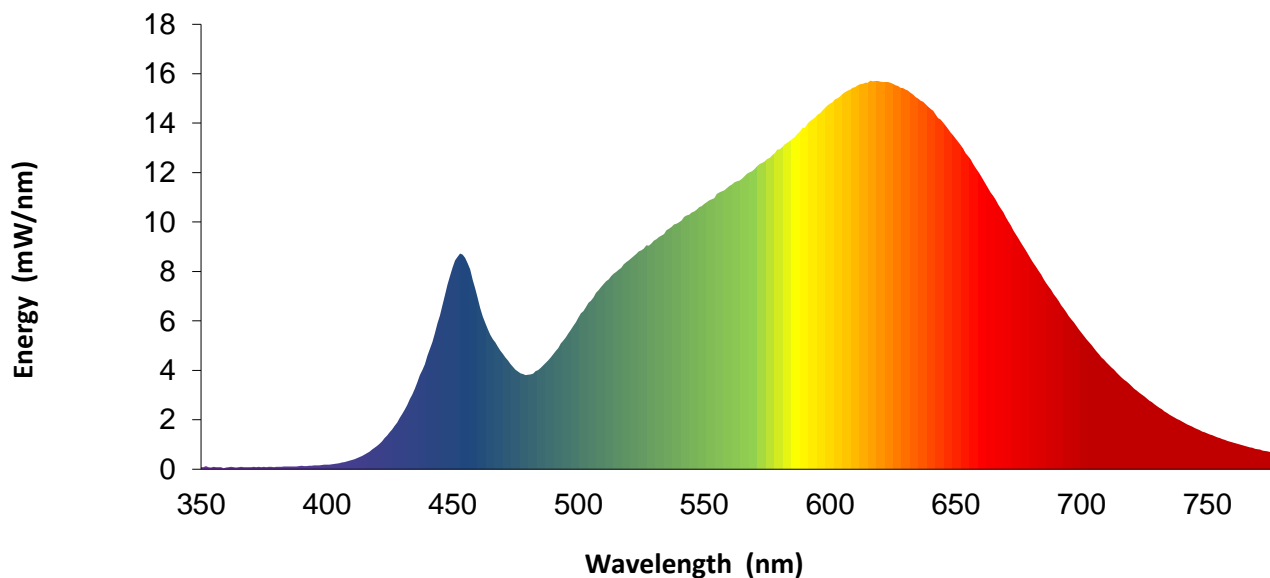

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only



**EQUIPMENT LIST**

**REPORT NO. 104797632CHI-004REV1**

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT210	146919	7/1/2021	7/1/2022
2	Omega Thermometer	DPI8-C24	146920	10/4/2021	10/4/2022
3	LSI High Speed Mirror Goniometer	6440T	146928	VBU	VBU
4	Newport Thermohygrometer	iServer	146379	4/13/2021	4/13/2022
5	Chroma Power Supply	61604	CHI0371	VBU	VBU
8	Newport Humidity Recorder	iServer	146961	9/21/2021	9/21/2022
9	Labsphere Spectroradiometer	CDS2600	CHI0539	VBU	VBU
10	3 Meter Sphere	SPR600	CHI0088	VBU	VBU
11	Elgar AC Power Supply	CW1251	146112	VBU	VBU
12	Sorenson DC Power Supply	XFR150-8	146846	VBU	VBU
13	Yokogawa Power Meter	WT1600	146767	4/8/2021	4/8/2022
17	Omega thermometer	USB TC08	EQAH002615	4/6/2021	4/6/2022
26	Xitron Power Analyzer	XT-2640	CHI0611	6/9/2021	6/9/2022

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

**REVISION HISTORY**

#	Revision Date	Updated By	Reviewed By	Description of Change
1	1/27/2022	Max Carvajal <i>MC</i>	Jeff Davis <i>JD</i>	Change to Model Number
---	---	---	---	---
---	---	---	---	---

Test Configuration	Tested Model No.	Pass/Fail/NA
1	FJ24-ZOOM-ZZ1-30K-BK (Max Beam)	NA







## ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: PureEdge Lighting

Date: 1/20/2022

Model: FJ24-ZOOM-ZZ1-30K-BK (Max Beam)

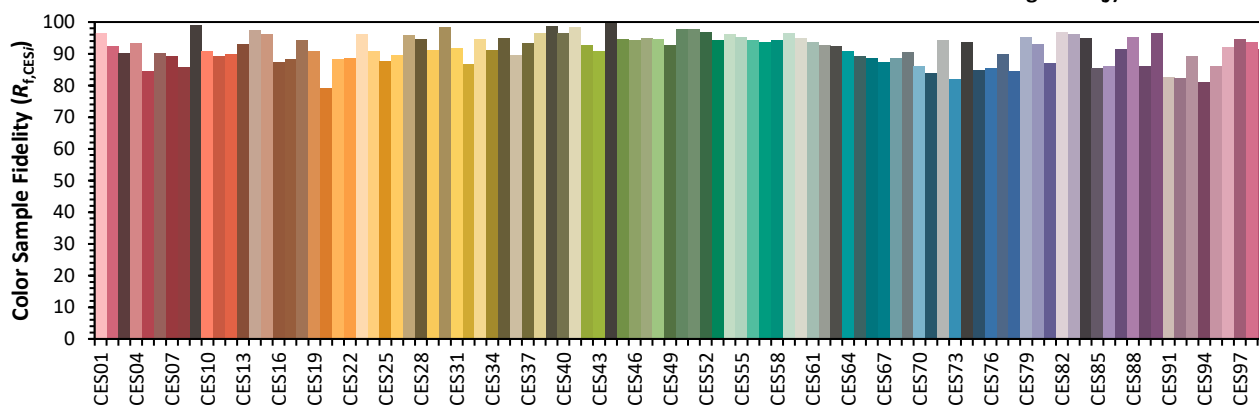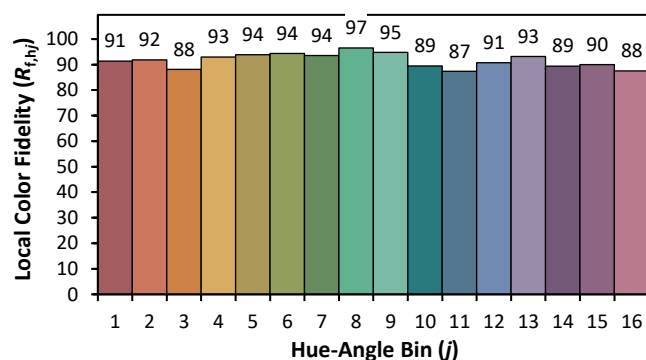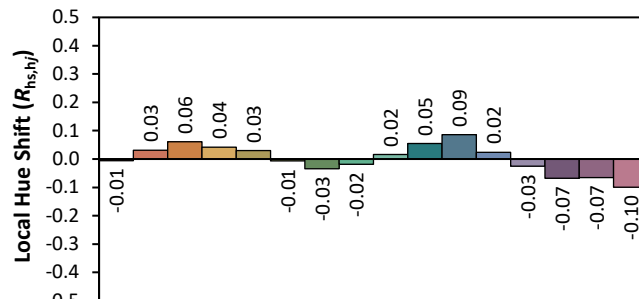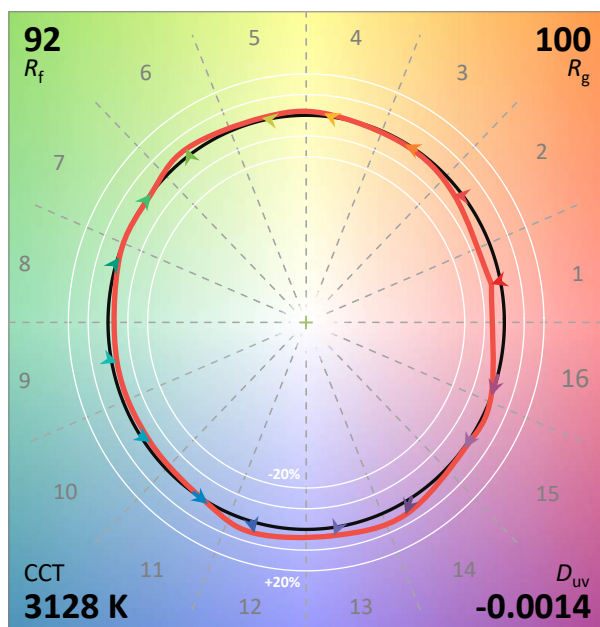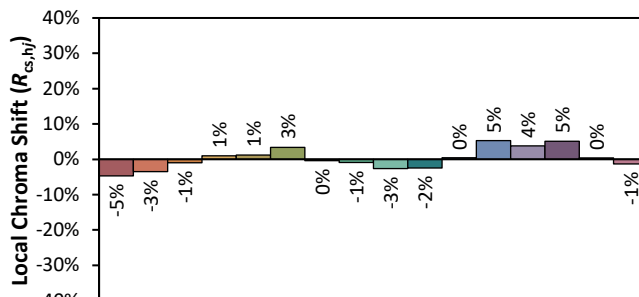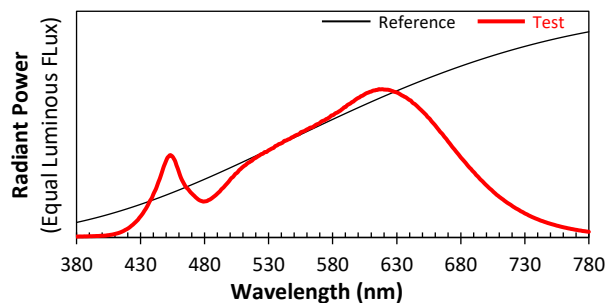

**Notes:** This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4263

y 0.3967

u' 0.2468

v' 0.5169