

Monorail Remote Mount Kit with 600W 12V dual feed magnetic transformer includes everything you need for a complete system — just add fixtures. Kit includes remote mount 600 watt 12 volt dual feed magnetic transformer and power canopy (isolating connectors included), Monorail, appropriate quantities of 1" standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

Length:

4, 8, 12, 16, 20, 24, 28 or 32 feet
 1.2, 2.4, 3.7, 4.9, 6.1, 7.3, 8.5 or 9.8 meters

Dimming:

With 1000 watt low voltage magnetic dimmer

Standard Mounting:

Rail mounts 1" (2.5cm) from ceiling. For 6"- 96" (15.2cm - 243.8cm) power and standoff lengths, see below.

Transformer:


Maximum 300 watt load per feed for 12 volt dual feed system.

Finish:


Satin Nickel, Polished Nickel or Antique Bronze

Weight:

23 - 28 lb (10.4 - 12.6 kg)

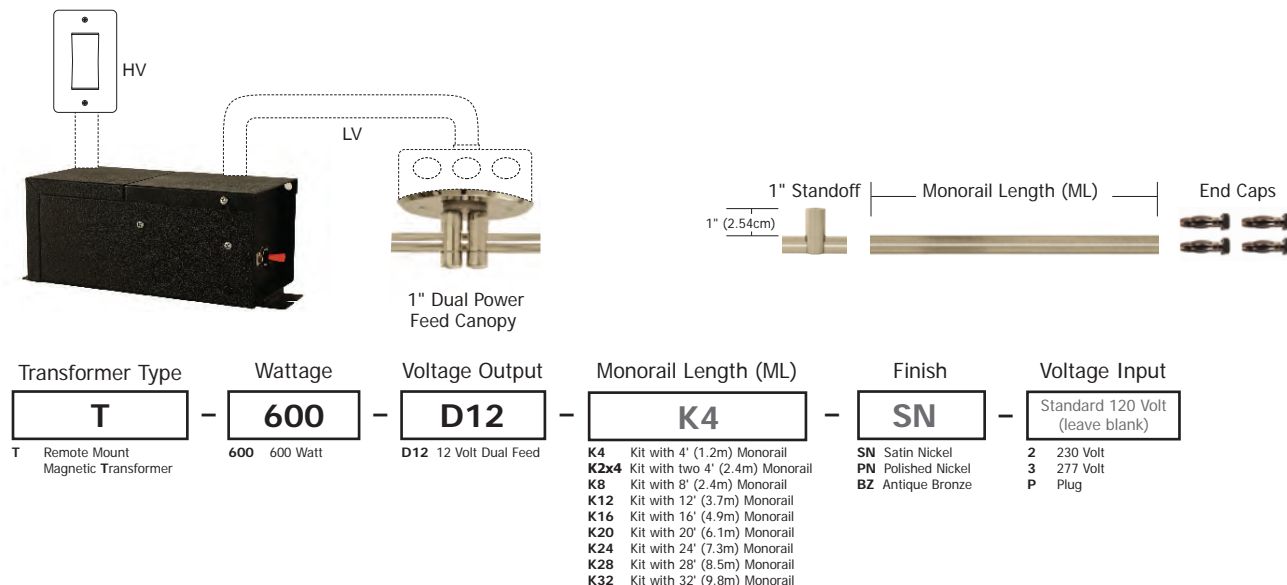

Monorail Remote Kit-Dropped with 600W 12V dual feed magnetic transformer includes everything you need for a complete system — just add fixtures. Kit includes remote mount 600 watt 12 volt dual feed magnetic transformer and power canopy (isolating connectors included), Monorail, appropriate quantities of standoffs for every 3 feet of rail and 2 pairs of end caps. Fast acting circuit breaker on 12 volt side of transformer will shut the system off in case of overload or short and can be easily reset. Satin nickel, polished nickel or antique bronze finish.

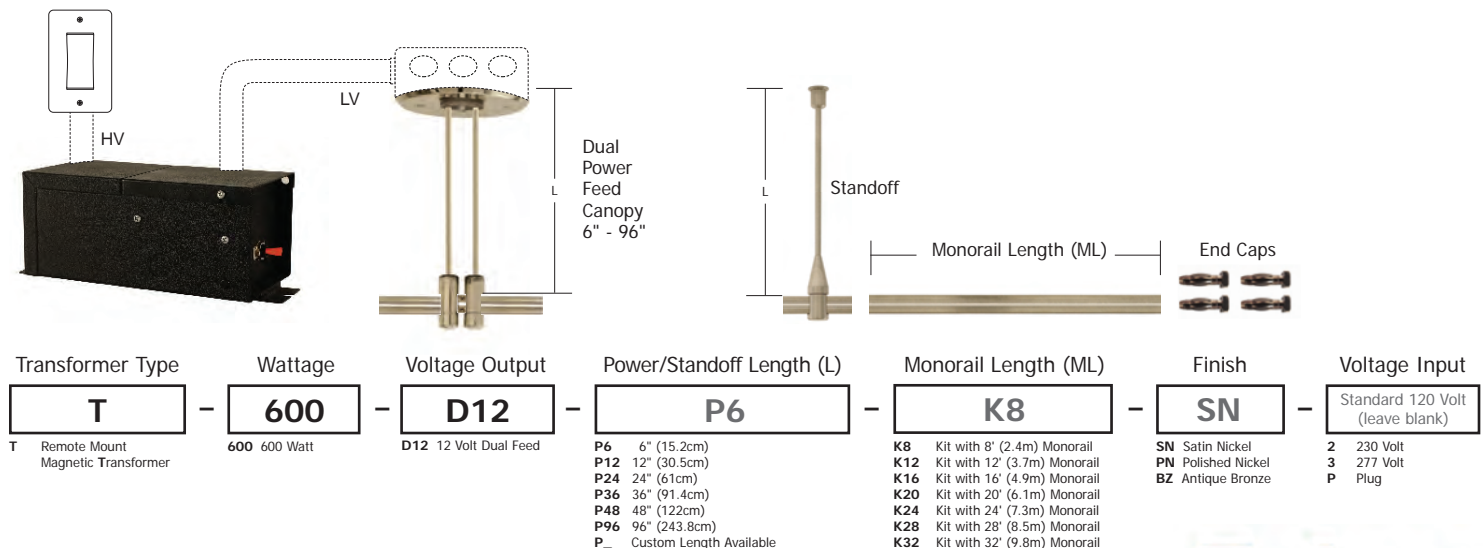

PROJECT:

 FIXTURE
 TYPE:

DATE: