




## Installation Instructions for Blocco and Coupe LED


### IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.
- This product is ceiling-mount only.
- This product can be dimmed with an electronic low voltage dimmer.

**SAVE THESE INSTRUCTIONS!**




### Install the Mounting Plate and Housing

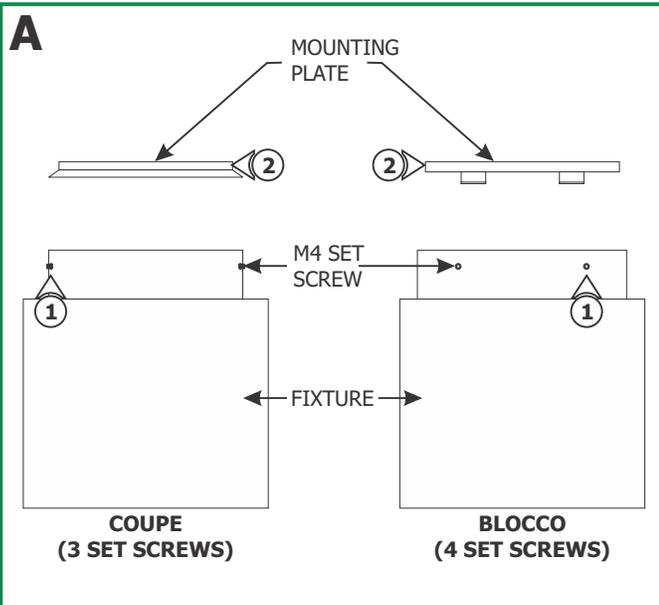


**NOTE:** Before beginning any electrical work, ensure that power to the junction box is turned **OFF**.

- 1: Loosen the M4 set screws using the 2mm Allen wrench.
- 2: Remove the mounting plate from the fixture.

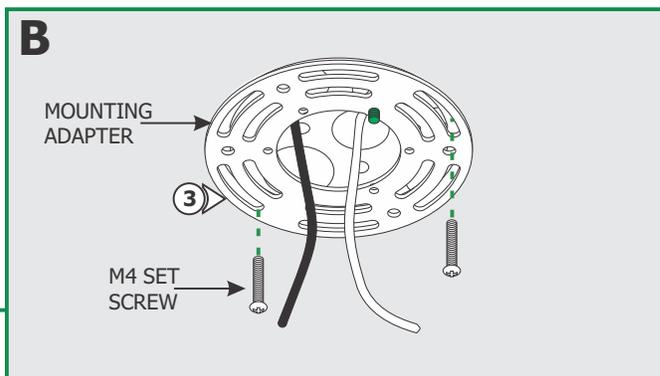


- 3: If required, secure the mounting adapter to the electrical holes with the two #8-32 screws provided.

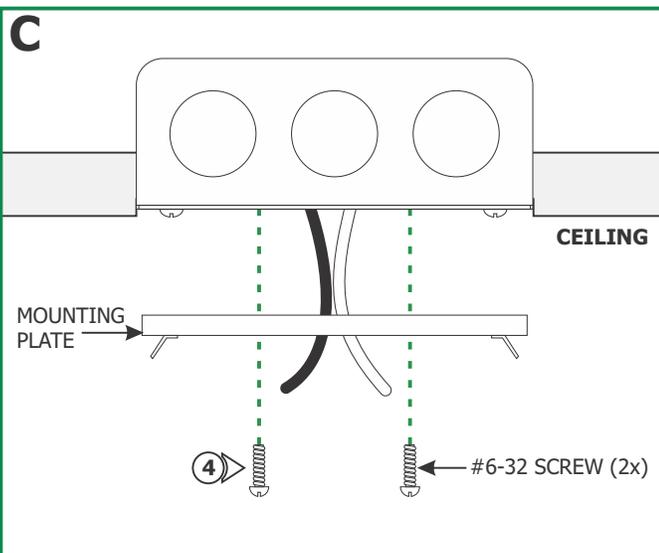


- 4: Feed the power wires through the center hole of the mounting plate and secure the plate to the mounting adapter using supplied 6-32 screws.

**D**

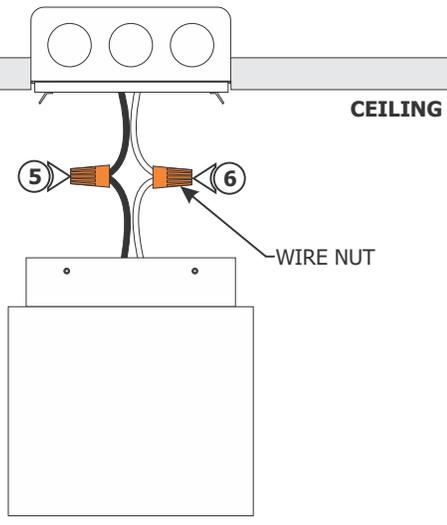

- 5:** Connect the black 120VAC hot wire to the black wire from the fixture power supply using a wire nut.
- 6:** Connect the white 120VAC neutral wire to the white wire from the fixture power supply using a wire nut.


**E**

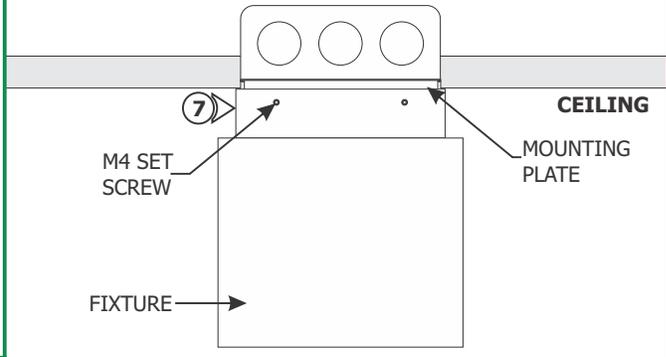

**NOTE:** Contains integrated LED consuming a total of 30 Watts

- 7:** Place the fixture to the mounting plate and secure by tightening the M4 set screws using a 2mm Allen wrench.

**F**

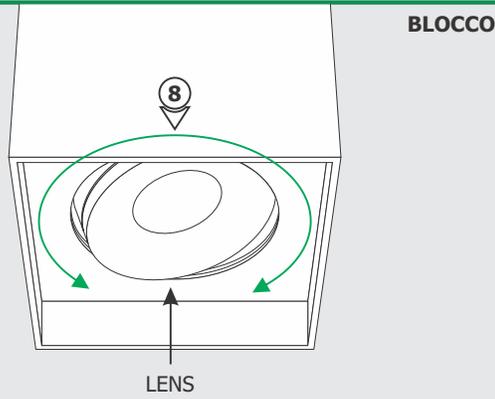

- 8:** If necessary, rotate and tilt the lens assembly.
- NOTE:** Lens assembly rotates 360° and tilts maximum 20°.

