



1718 W. Fullerton Chicago, IL 60614  
 Ph: 773.770.1195 • Fax: 773.935.5613  
 www.PureEdgeLighting.com • info@PureEdgeLighting.com  
 © 2016 PureEdge Lighting. All Rights Reserved.


## Installation Instructions for Pipeline Wall Vanity - Center Feed

P2WDP-\_-C4R-\_-


### IMPORTANT INFORMATION

- This instruction shows a typical installation.
- This product is wall mount only.
- This product is dimmable with a low voltage electronic dimmer.
- This product mounts to a standard junction box with plaster ring or octagon box.

**SAVE THESE INSTRUCTIONS!**





### Section One: Install the Fixture

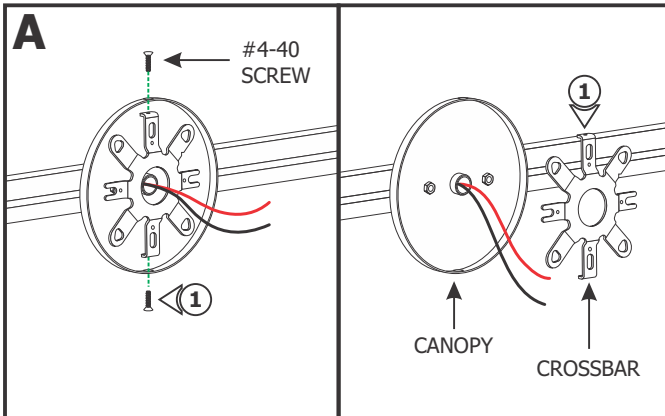

**NOTE:** Before beginning any electrical work, ensure that the power to the junction box is off.

- 1:** Remove the two #4-40 screws using a 1/16" Allen wrench to remove the crossbar off of the canopy.


- 2:** Connect the neutral wire from the 120VAC circuit to the white wire of the power supply with a wire nut.
- 3:** Connect the hot wire from the 120VAC circuit to the black wire of the power supply using a wire nut.
- 4:** Place the power supply and wires inside the junction box.

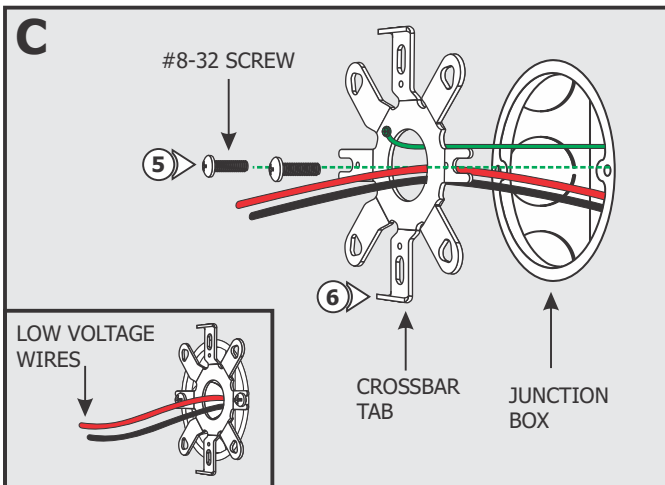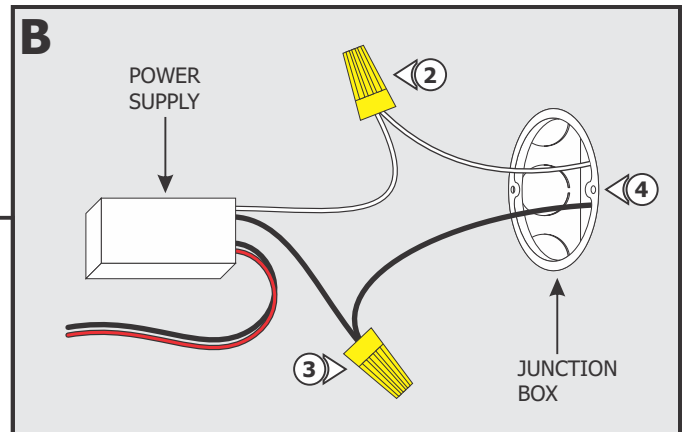

- 5:** Feed the low voltage wires from the power supply through the crossbar center hole.

- 6:** Align the crossbar tabs vertically and mount the crossbar to the junction box holes with the two #8-32 screws provided.

**NOTE:** Make sure the crossbar is grounded in accordance to local electrical codes.


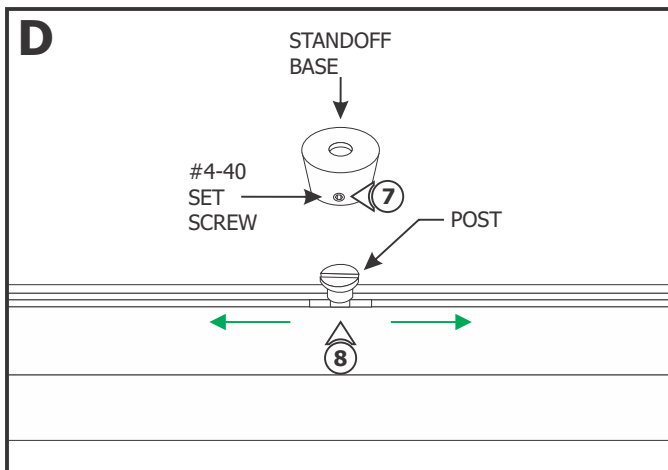


**7:** Loosen (**Do Not Remove**) the #4-40 set screw on the standoff base using a 0.05" Allen wrench to remove it from the fixture.

**8:** It is recommended to have the posts near the end of the fixture to keep the fixture aligned. Adjust the standoff positions by loosening the post and sliding it across the channel. Tighten the post to secure it in place.

**9:** Repeat steps 7 and 8 for the other standoff post.

**10:** Measure the distance between the center of the canopy and each standoff post. Mark the locations of the standoff posts on the wall from the center of the junction box.

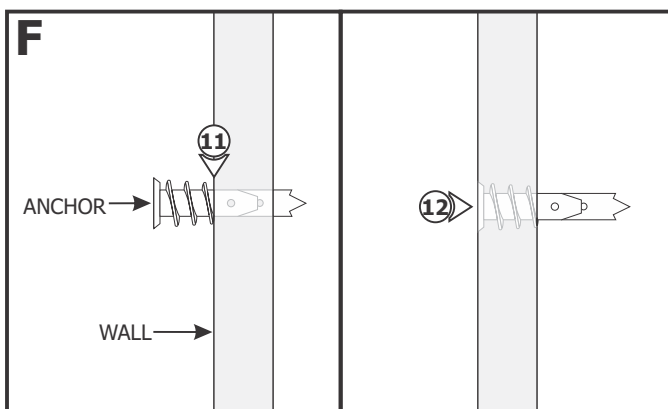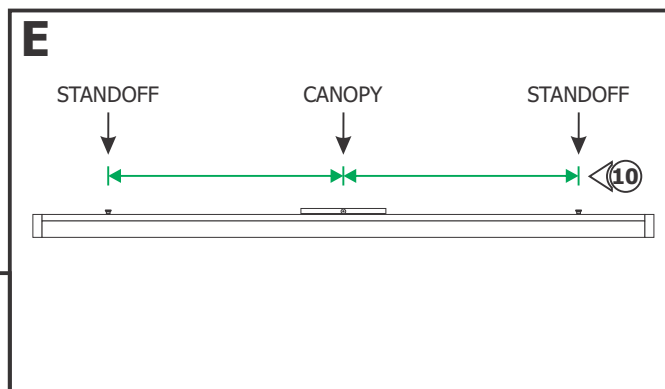


**11:** Tap the anchor onto the marked location up to the threaded portion with a hammer.


**12:** Screw in the threaded portion of the anchor with a Phillips screwdriver.

**13:** Feed the #8 screw through the standoff base into the anchor.

**14:** Tighten the #8 screw completely into the anchor.



**15:** Repeat steps 11 through 14 for the other standoff.

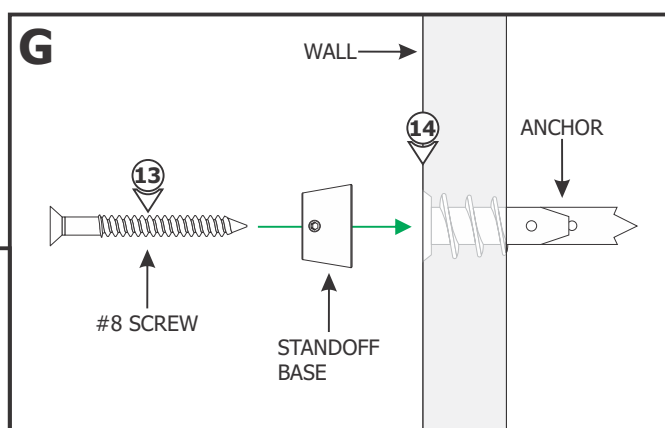

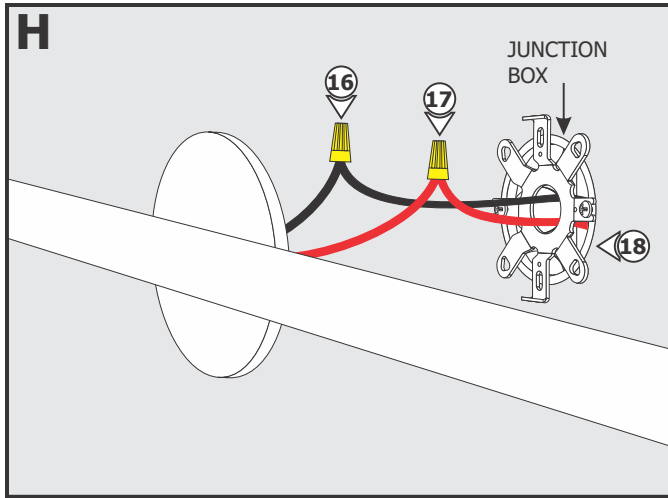

- 16:** Connect the low voltage -24VDC black wire from the power supply to the -24VDC black wire from the fixture using a wire nut.
- 17:** Connect the low voltage +24VDC red wire from the power supply to the +24VDC red wire from the fixture using a wire nut.
- 18:** Place all the wires and wire nut connections inside the junction box.

- 19:** Align the posts on the fixture with the standoff bases and secure with the #4-40 set screws.

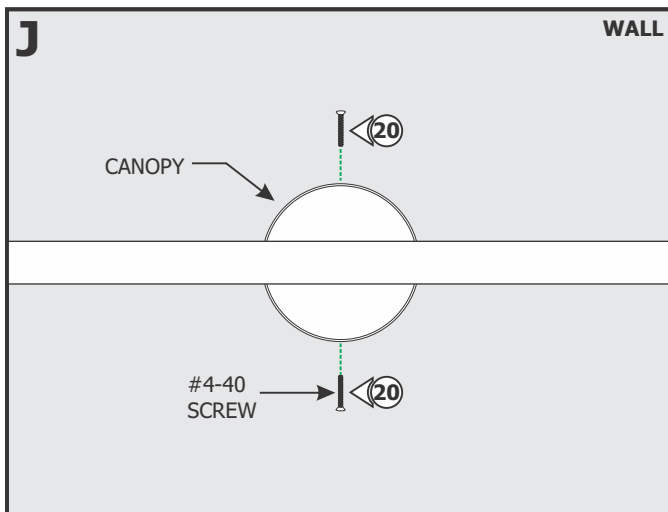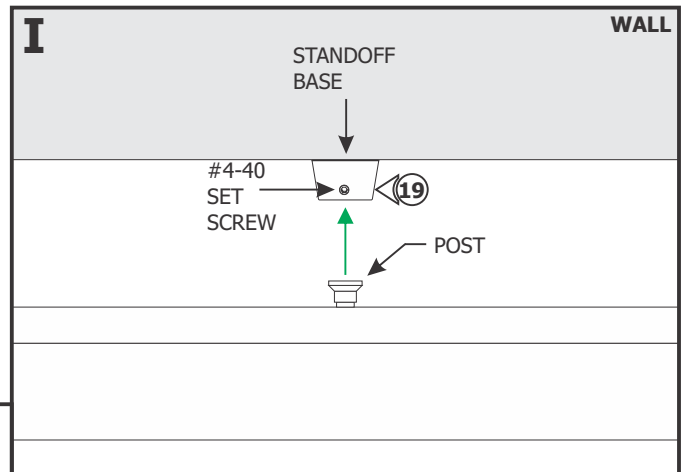

- 20:** Align the canopy holes with the crossbar holes and secure the fixture to the crossbar with the provided #4-40 screws using a 1/16" Allen wrench.