


# Installation Instructions for CHANNEL L-SHIELD FOR CIRRUS WALL WASH AND WALL GRAZER


## IMPORTANT INFORMATION

- These instructions show a typical installation.
- Use this product with Cirrus Wall Wash and Wall Grazer only.


**SAVE THESE INSTRUCTIONS!**

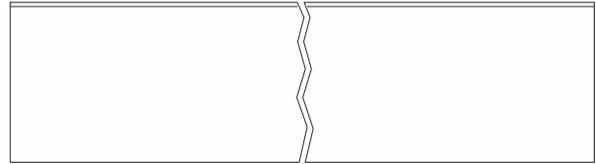


## Prepare And Install L-Shield

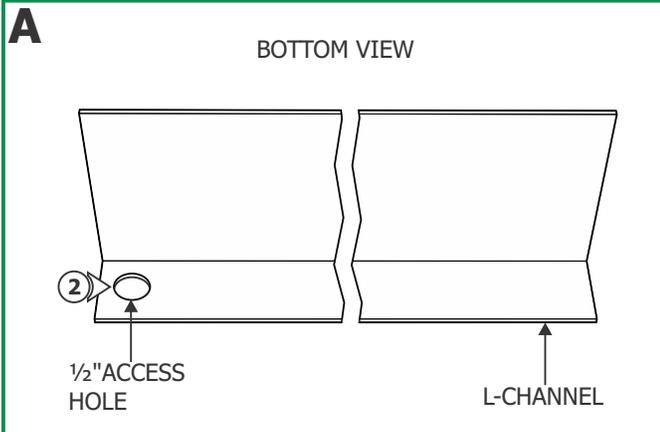

- 1: Locate and install junction box. Refer to instructions included with the channel.
- 2: Mark and drill a 1/2" hole into the channel where the junction box is installed. This will be used to feed the power connector to the remote power supply wires.

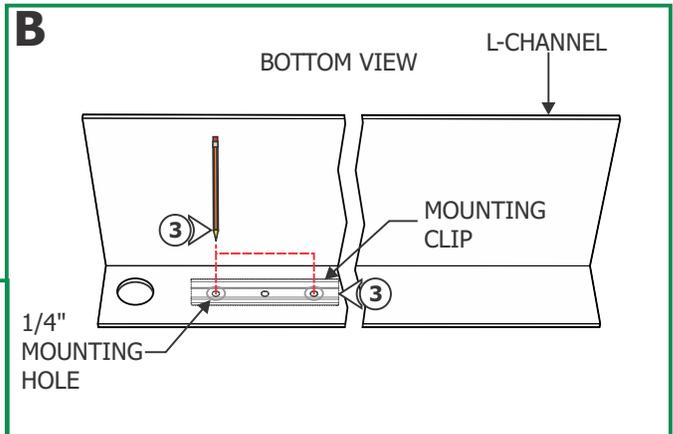


- 3: Mark the location of each mounting and locking clip per the instructions included with the channel.
- 4: Drill two 1/4" holes through the L-Channel for each mounting or locking clip location. Repeat as needed.

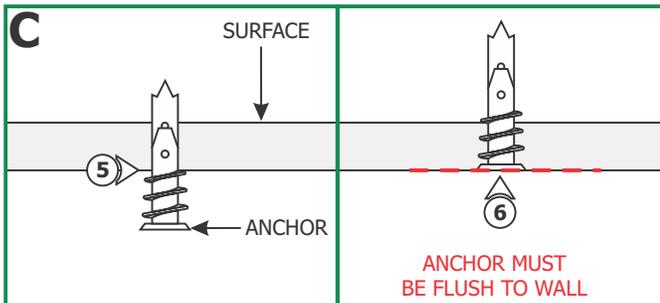


**NOTE:** Steps 5 and 6 are for drywall mounting. Omit these steps if mounting the clips to a wood surface directly.

- 5: Using the L-Channel, mark the locations of the mounting clips. Tap drywall anchors onto the marked points up to the threaded portion with a hammer.
- 6: Screw in the threaded portion of the anchors with a Phillips screwdriver.

- 7: Thread the power connector wires through the 1/2" access hole.
- 8: Connect the red power connector wire to the red power supply wire using a wire nut.
- 9: Connect the black power connector wire to the black power supply wire using a wire nut.

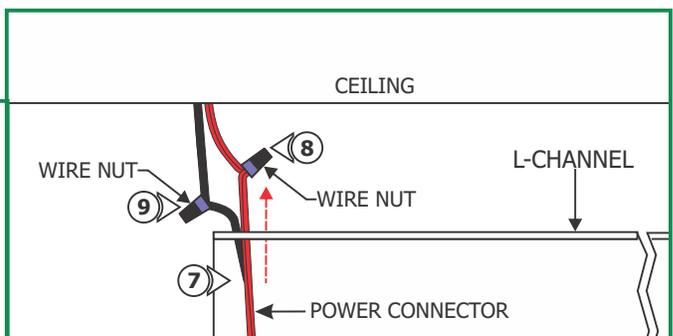

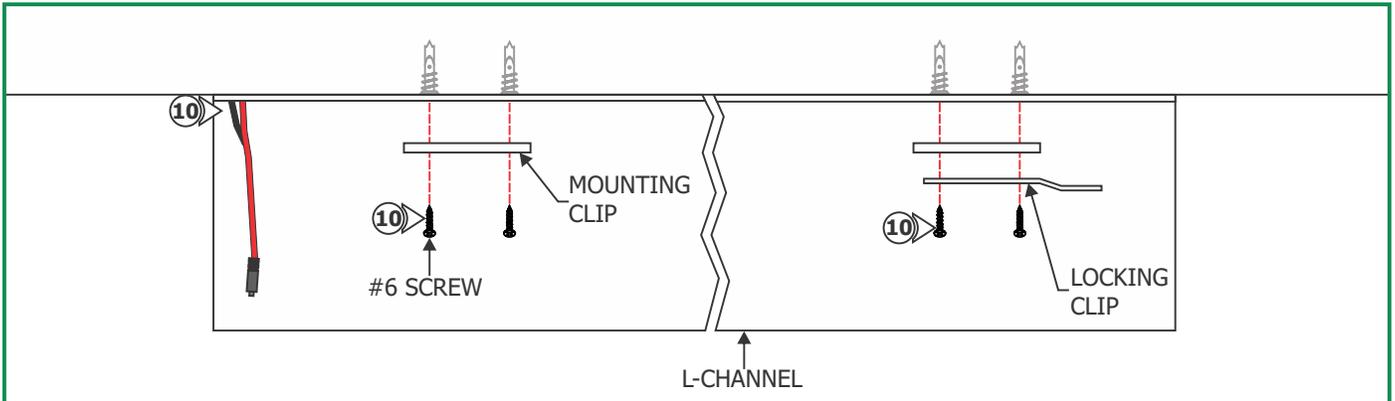

**10:** Insert the power connections into the junction box.

**11:** Align the L-Channel with the drywall anchors. Screw the mounting/locking clips to the drywall anchors using two #6 screws.

**12:** Refer to the installation instructions for the channel to complete the installation.