**CPL2-12-_-P**

904-CPL2-12-P-01

ETL LISTED
Intertek

Installation Instructions for **Cody2 12" Plug-In Picture Light**
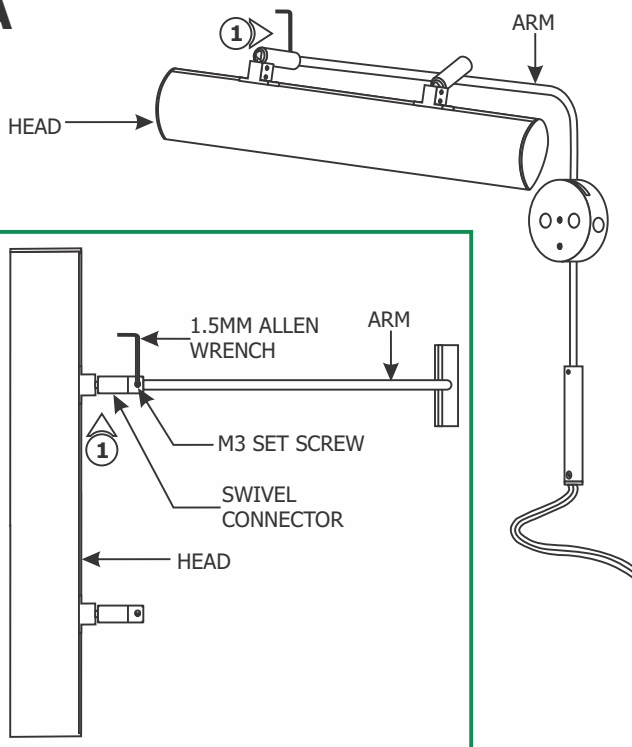
IMPORTANT INFORMATION

- This product is ETL listed for indoor location.
- This product is wall mounted only.
- This instruction shows a typical installation.

SAVE THESE INSTRUCTIONS!

Install the Fixture

A

HEAD — ARM

1.5MM ALLEN WRENCH — ARM

M3 SET SCREW

SWIVEL CONNECTOR

HEAD

1: Rotate the Cody2's head perpendicular to the arm making sure the arm is completely inserted into the head swivel connector. Tighten the M3 set screw on the swivel connector with the provided 1.5mm Allen wrench to secure the head in place.

B

MOUNTING BRACKET — JOINING ARM

HEAD

1.5MM ALLEN WRENCH — ARM

M3 SET SCREW
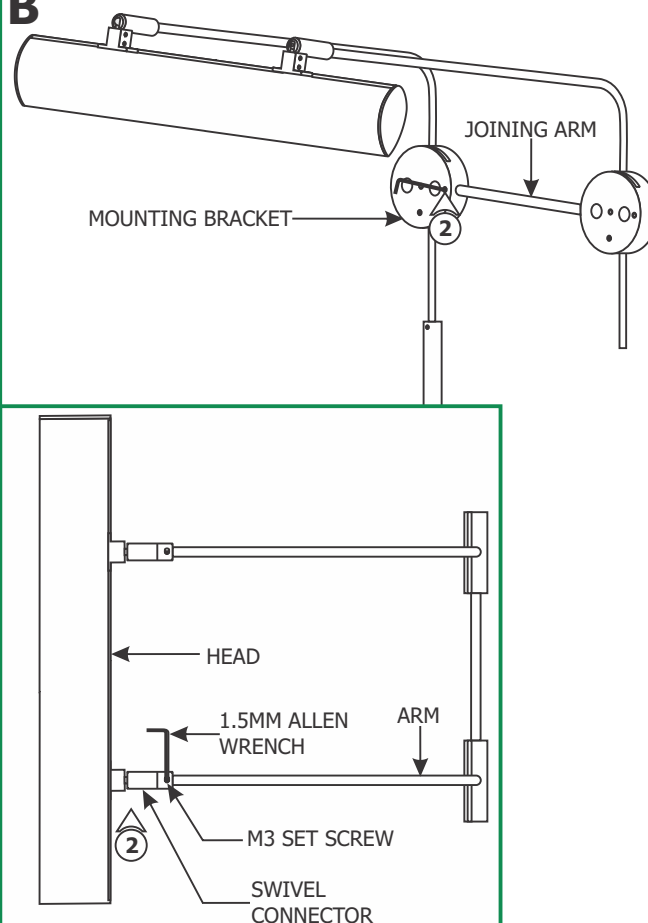
SWIVEL CONNECTOR

2: Insert the loose arm assembly (provided in the box) into the other swivel connector and insert the joining arm into the mounting bracket of the first arm. Tighten the M3 set screw on the swivel connector and mounting bracket with the 1.5mm Allen wrench.

C

MOUNTING BRACKET

ANCHOR
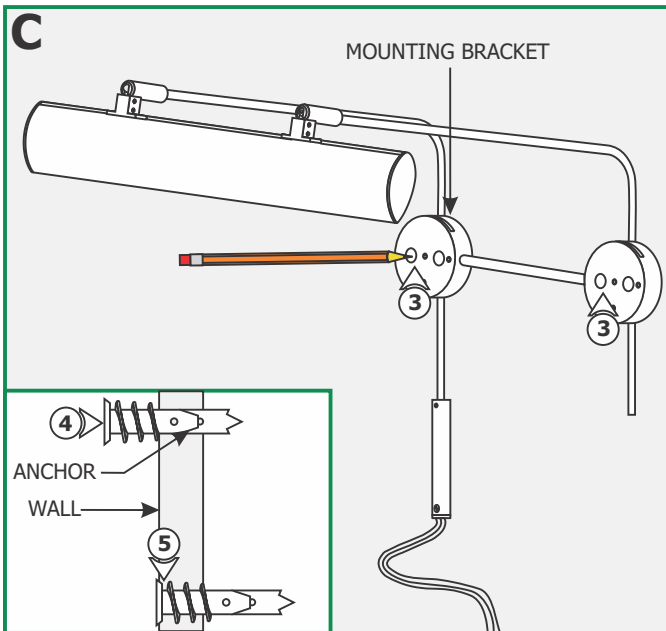
WALL

NOTE: The Cody2 12" plug-in comes with 9' of cord and plug-in power supply. Make sure there is a power outlet near to where Cody2 12" will be mounted

3: Hold the mounting bracket against the wall where Cody2 12" will be mounted. Level the mounting bracket and mark the bracket holes on the wall.

4: Tap the anchors onto the marked points into the wall up to the threaded portion with a hammer.

5: Screw the threaded portion of the anchors in with the a Phillips screwdriver.

6: Line up the mounting bracket holes with the anchors and secure the fixture to the anchors with the four #8 screws provided.

D

ANCHOR

MOUNTING BRACKET

#8 SCREW

E

ARM

2MM ALLEN WRENCH

M4 SET SCREW
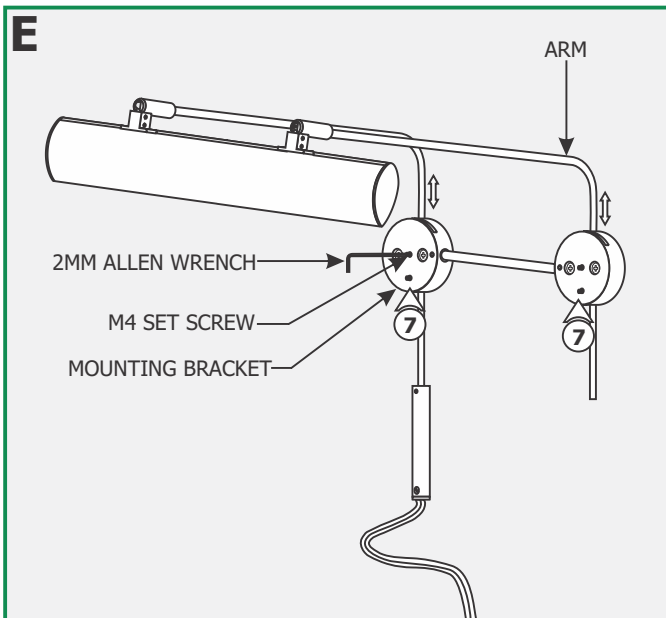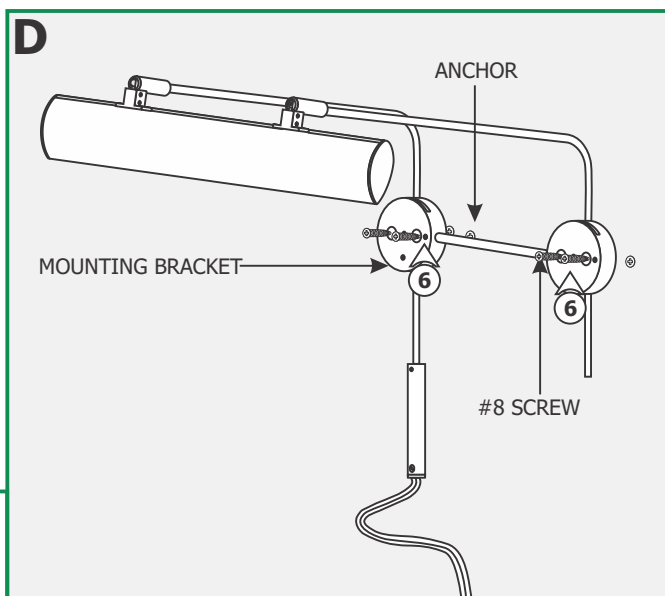
MOUNTING BRACKET

**7:** To adjust the height, loosen the four M4 set screw on the mounting brackets with the provided 2mm Allen wrench. Adjust the Cody2 to the desired height by sliding it up or down. Tighten the four M4 set screws with the 2mm Allen wrench.

F

CORD

CABLE CLIP

8
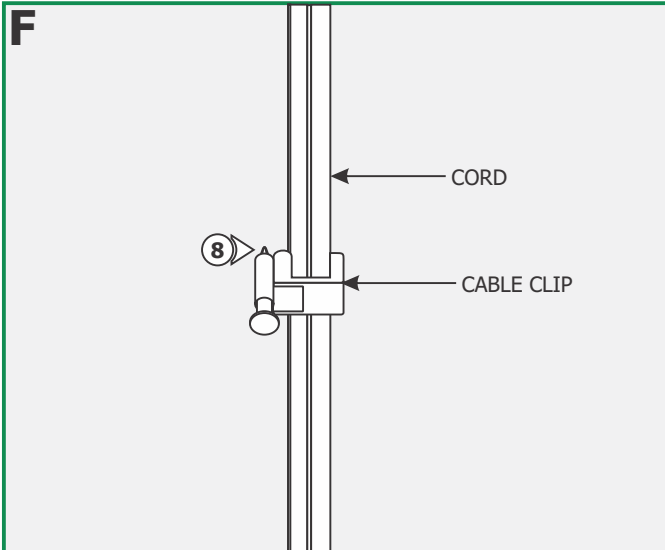
8: Use the provided cable clips to secure the cord to the wall, or use a cable cover (not provided)

G

MOUNTING BRACKET SLOT

FRAME CABLE

9

9
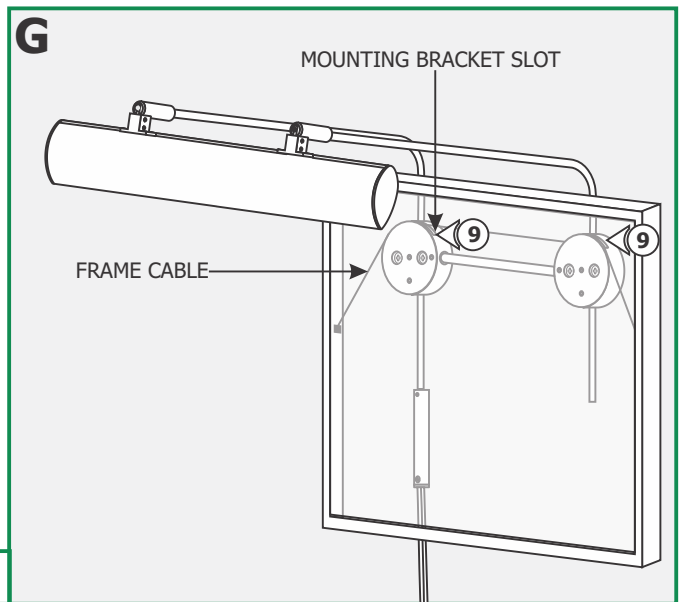
9: Hang the frame cable into the two mounting bracket slots.

H

FIXTURE HEAD

PICTURE

10
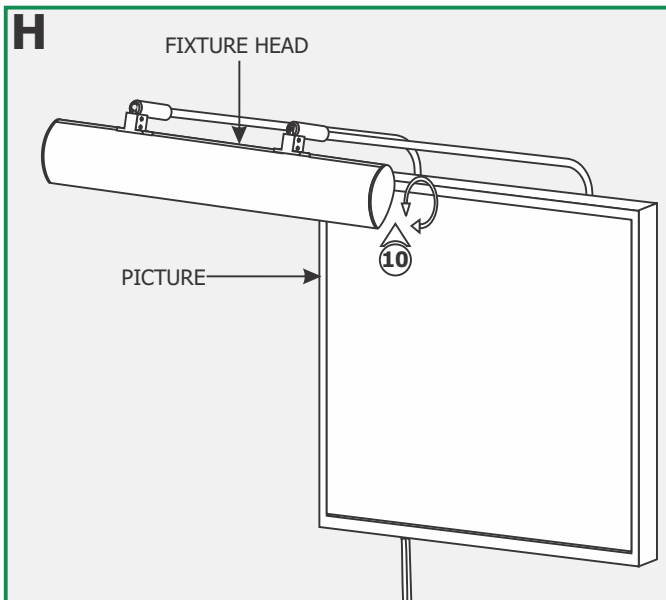
10: Rotate the fixture head to properly wash the picture with light.

NOTE: The Cody2 12" contains **12** watt integrated LED lamps. These lamps are rated for 50,000 hours.

I

PLUG-IN SWITCH (OPTIONAL)

PLUG-IN POWER SUPPLY

120 VAC POWER OUTLET

11
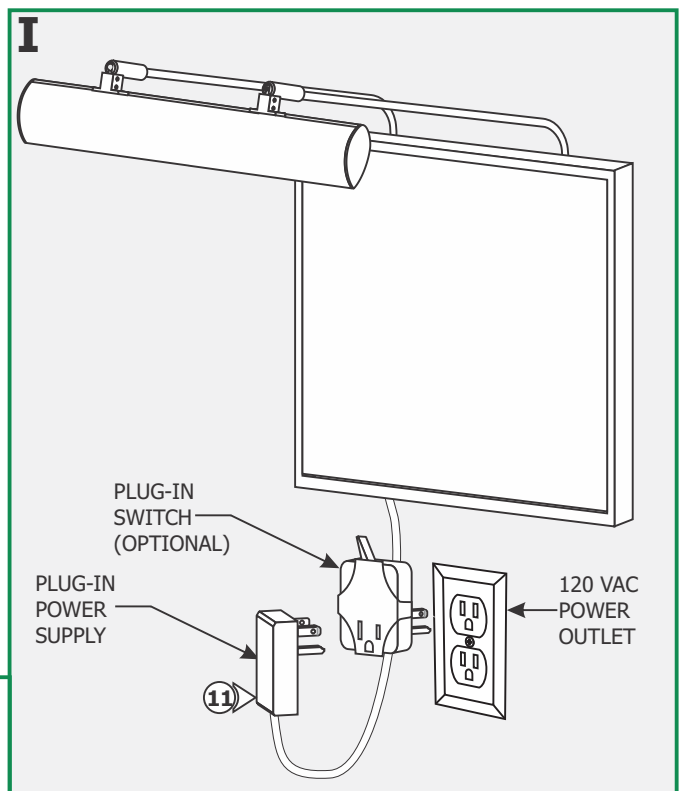
11: Use the plug-in switch (optional) in line with the plug-in power supply and outlet to turn the fixture on and off. DO NOT install any other switch to the cord. This may result in damage to the LEDs.