




1718 W. Fullerton Chicago, IL 60614  
 Ph: 773.770.1195 • Fax: 773.935.5613  
 www.PureEdgeLighting.com • info@PureEdgeLighting.com  
 © 2016 PureEdge Lighting. All Rights Reserved.

## Installation Instructions for **Fast Jack Power Round & Square 4" Flat Canopies**

FJP-4\_--


### IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.
- This product is dimmable with a standard ELV dimmer.
- The product can be installed to a 4" electrical box with round plaster ring, or to an octagon electrical box.
- Minimum electrical box volume must be 6 cubic inches (98 cubic centimeters).

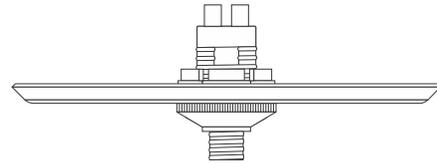


**SAVE THESE INSTRUCTIONS!**


### Install the Canopy

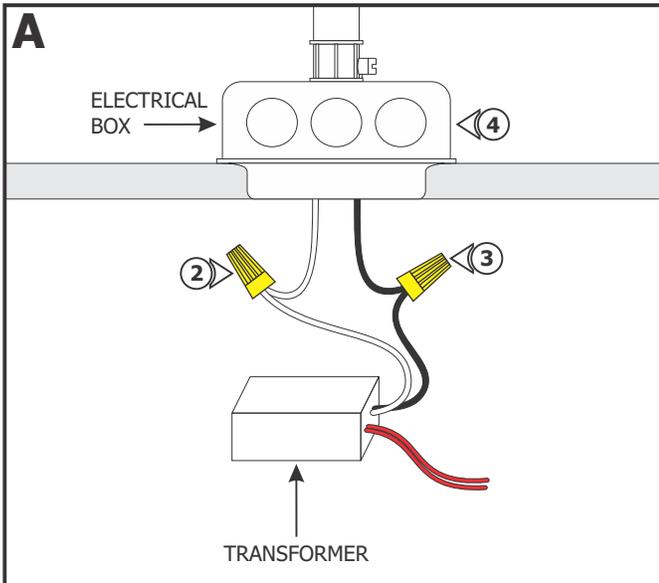

- 1: Turn the power to the electrical box off.
- 2: Connect the white transformer wire to the neutral power wire with a wire nut.
- 3: Connect the black transformer wire to the hot power wire with a wire nut.
- 4: Place the transformer and transformer wires inside the electrical box.

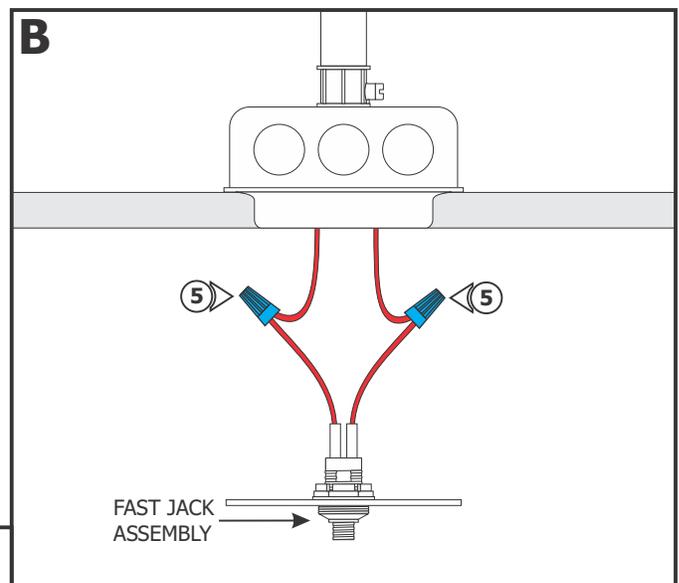



- 5: Connect each Fast Jack assembly wire to one low voltage transformer wire with a wire nut.

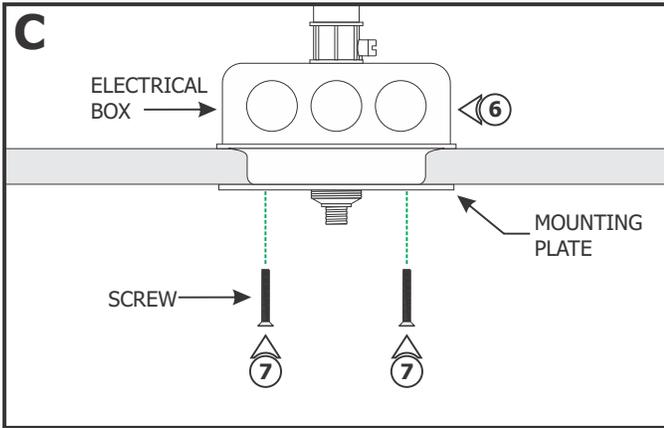

**6:** Place all wires inside the electrical box.

**7:** Secure the Fast Jack assembly mounting plate to the electrical box by tightening the two provided screws.

**8:** Place the canopy onto the Fast Jack port assembly against the electrical box and secure it in place by tightening the knurled cap to the Fast Jack port. **Make sure the knurled cap is not cross threaded.**

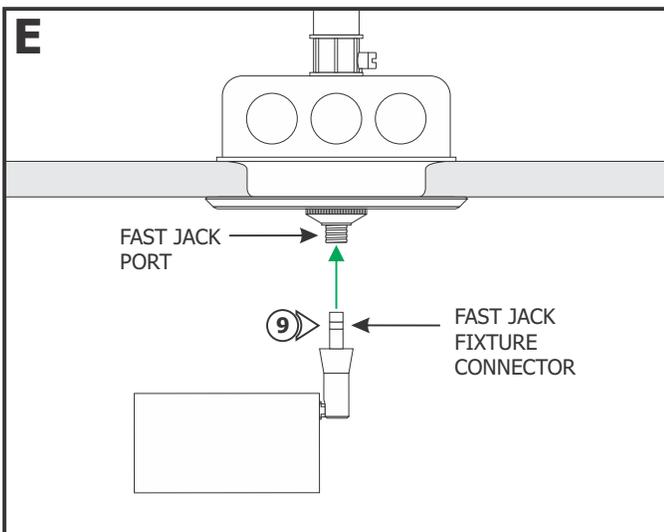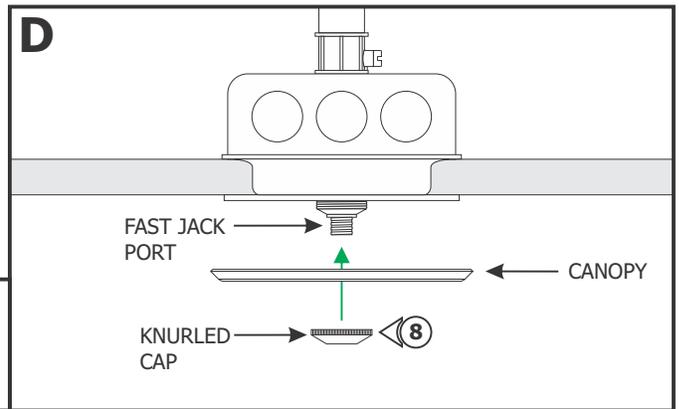

**CAUTION: Risk of Fire: Max** load of Fast Jack canopy is **75 watt.**

**9:** Use fingers to tighten the Fast Jack fixture connector into the Fast Jack canopy port.