

## Installation Instructions for Pre-Bent Monorail


### IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.
- Monorail is bendable horizontally to a radius as small as 6".
- The product is intended to be used with Edge Lighting Monorail systems only.

**SAVE THESE INSTRUCTIONS!**




## Connect the Pre-Bent Monorail Sections with the Conductive Connectors

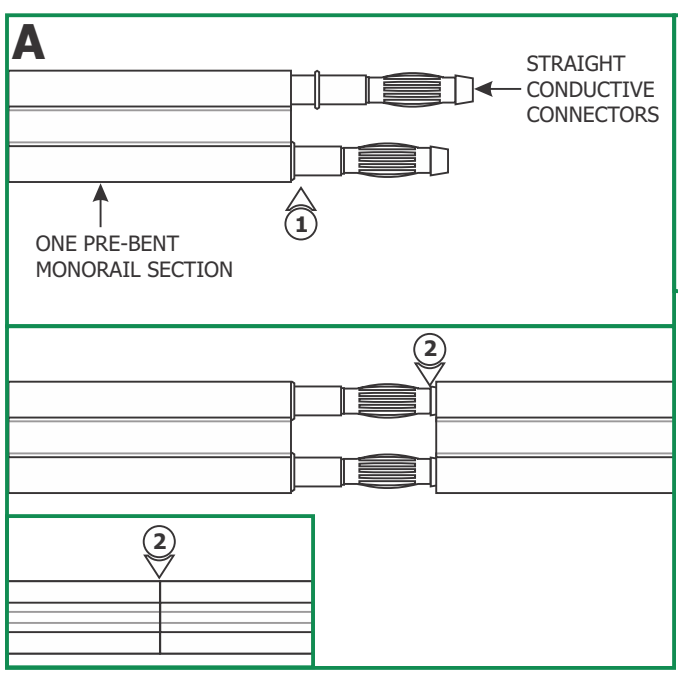


- 1:** Push the Monorail conductive connector pins completely into one pre-bent Monorail section. **Make sure this Monorail section is secured with the standoffs (Refer to the instructions provided with the standoffs).**
- 2:** Push the other pre-bent Monorail section completely onto the Monorail straight conductive connector pins and simultaneously connect the pre-bent Monorail to the standoffs.

## Connect the Pre-Bent Monorail section with the Isolating Connectors


- 1:** Push the straight isolating connectors completely into one pre-bent Monorail section end. **Make sure this pre-bent Monorail section is secured with the standoffs (Refer to the instructions provided with the standoffs).**

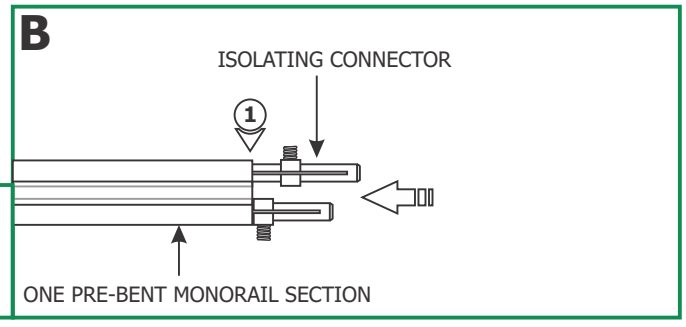

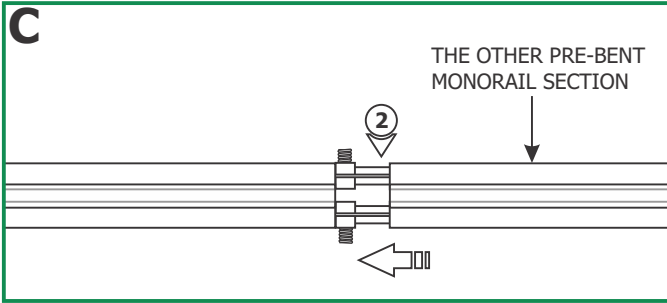


**2:** Push the other pre-bent Monorail section entirely onto the isolating connectors and simultaneously connect the pre-bent Monorail to the standoffs.


**3:** Tighten the #6-32 set screw on each of the isolating connectors firmly with the 1/16 Allen wrench. **Do not over tighten the set screws as this may strip the threads.**

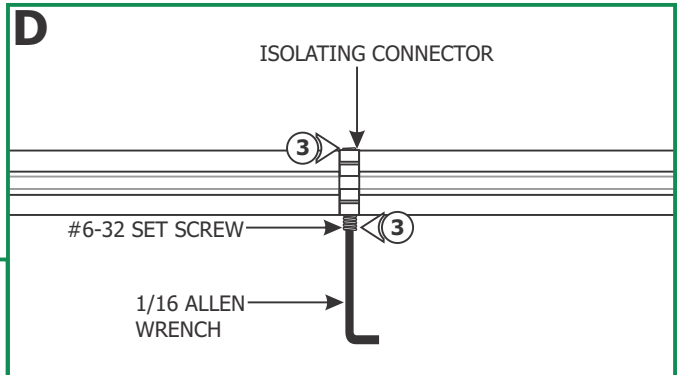

## Connecting a Pre-Bent Circle Sections

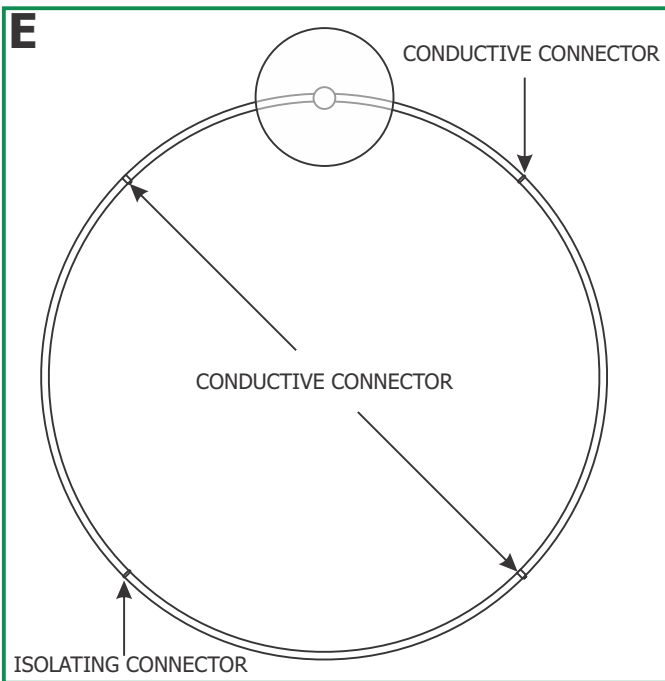

**1: For the Single Power Feed Connection-** Use one set of isolating connectors and the appropriate sets of conductive connectors provided to connect the pre-bent Monorail sections together as a circle.

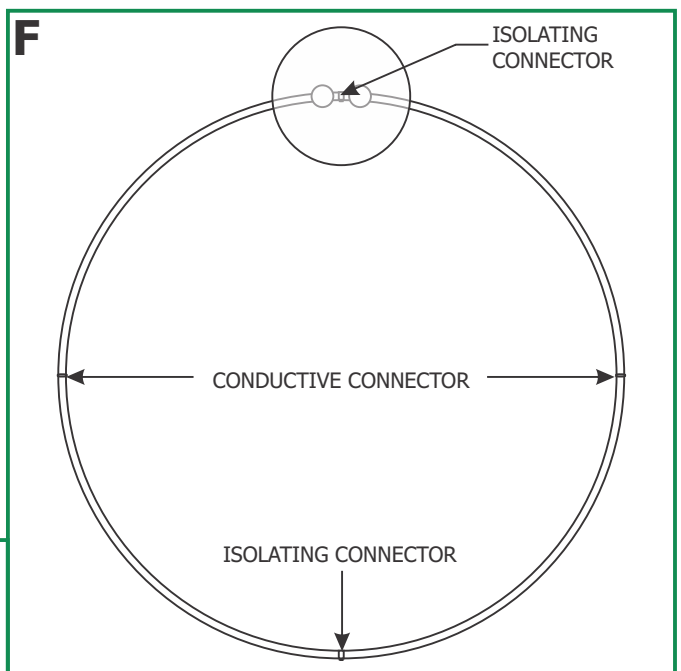

**2: For the Dual Power Feed Connection-** Use two sets of isolating connectors and the appropriate sets of conductive connectors provided to connect the pre-bent Monorail sections together as a circle.