




**MTE-150L-12-SN**

**Description:**

The **LED** Surface Mount 150 Watt Electronic Transformer provides a decorative element and powers the Monorail from an electrical box within range of the system. The compact, lightweight transformer converts 120 volts to safe-to-touch 12 volt power. The short-circuit protected transformer can be reset at wall switch in the event of a short or overload.

Rail attaches to one or both side-feed contacts using push-in conductive connectors (included). An insert is provided to cover unused side-feed contact. The transformer powers a total of 150 watt **LED** and/or halogen load of Monorail up to 20 feet long. Use with 1" Rigid Standoffs. For extending rail from the ceiling, up to 96", use Adjustable Power Feed MP-ME-96-SN (PN-BZ).

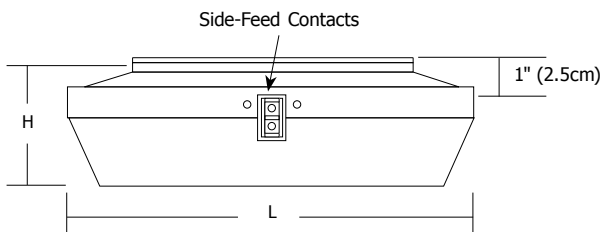

**Power Input:**

120 volts AC 1.25 amp

**Power Output:**

12 volt AC, 150 Watt 12.5 amps

**Dimmer Used:**

300 Watt Electronic Low Voltage Dimmer

**General Requirements:**

1" Standoff is used with the surface mount transformer.

**Dimensions:**

7.47"(L) x 2.36"(H)  
(18.97cm x 6cm)

**Finish:**

Satin Nickel, Polished Nickel or Antique Bronze

**Weight:**

4 lb (1.8 kg)

System		Power/Voltage Output		Finish
<b>MTE</b>	-	<b>150L-12</b>	-	<b>SN</b>
<small>MTE Monorail Transformer Electronic Surface Mount</small>		<small>150L-12 150 LED Watt 12 Volt</small>		<small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small>