




MTE-300-12-SN

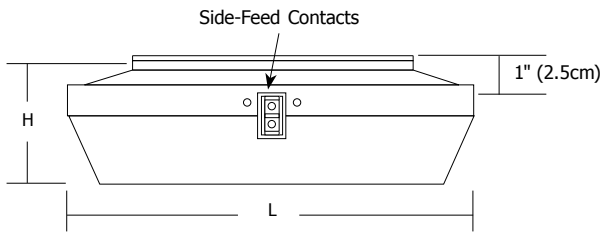

Description:

The Surface Mount 300 Watt Electronic Transformer provides a decorative element and powers the Monorail from an electrical box within range of the system. The compact, lightweight transformer converts 120 volts to safe-to-touch 12 volt power. The short-circuit protected transformer can be reset at wall switch in the event of a short or overload.

Rail attaches to one or both side-feed contacts using push-in conductive connectors (included). An insert is provided to cover unused side-feed contact. The transformer powers a total of 300 watt halogen load of Monorail up to 30 feet long. Use with 1" Rigid Standoffs. For extending rail from the ceiling, up to 96", use Adjustable Power Feed MP-ME-96-SN (PN-BZ).

Power Input:

120 volts AC 2.5 amp

Power Output:

12 volt AC + DC, 300 Watt 25 amps

Dimmer Used:

600 Watt Electronic Low Voltage Dimmer

General Requirements:

1" Standoff is used with the surface mount transformer.

Dimensions:

7.47"(L) x 2.36"(H)
(18.97cm x 6cm)

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Weight:

4 lb (1.8 kg)

System		Power/Voltage Output		Finish
MTE	-	300-12	-	SN
MTE Monorail Transformer Electronic Surface Mount		300-12 300 Watt 12 Volt		SN Satin Nickel PN Polished Nickel BZ Antique Bronze

