



MTE-RC-150-12-WH-SN
Monorail 150 Watt, 12 Volt Recessed Mount Electronic Transformer in Satin Nickel with White Canopy Finish.

Description:

The Recessed Can to Monorail Retrofit (with Transformer & Canopy). The electronic transformer canopy retrofits an existing 6" - 6 1/2" diameter recessed downlight into a transformer that powers a Monorail system mounted 1" from ceiling. Not extendable.

Power Input:

120 volts AC 1.25 amp

Power Output:

12 volts AC 150 watt 12.5 amp

Dimmer Used:


300 Watt Electronic Low Voltage Dimmer

General Requirements:

1" Standoff is used with Recessed Mount Retrofit transformer.

Dimensions:

7.8"(L) x 1"(H)
(19.7cm x 2.5cm)

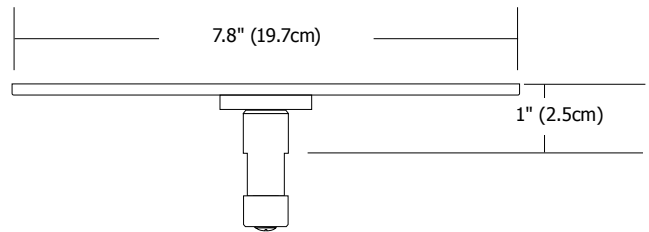

Finish:

Satin Nickel, Polished Nickel or Antique Bronze

Retrofit Compatibility:

The Retrofit Monorail Transformer Canopy is compatible with: Juno IC2, TC2 and TC2R; HALO H7T and H7RT; Cooper Lighting H27RT; Capri (Thomas) Lighting PR75ASIC/TPR75ASIC/DY6431; Progress Lighting P7TG, P8TG and PIO8-TG cans.

Edge Lighting is not affiliated with nor endorsed by any of the companies listed above.

| | | | | |
|--|--------------------------------|--|-------------------------|---|
| System | Type | Power / Voltage Output | Canopy Finish | Finish |
| MTE | RC | 150 -12 | WH | SN |
| <small>MTE Monorail Transformer Electronic</small> | <small>RC Recessed Can</small> | <small>150-12 150 watt 12 volt</small> | <small>WH White</small> | <small>SN Satin Nickel PN Polished Nickel BZ Antique Bronze</small> |