


INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES

24VDC, LUTRON ECOSYSTEM

Tunable White uses one or two power supplies, dependent on the controller or dimmer(s) used. Lutron Hi-Lume® can be used in both single or dual power formats, dependent on the controller or dimmer(s).

LUTRON HI-LUME® PREMIER .1% ECOSYSTEM®		
ORDERING CODES	2-WIRE ECOSYSTEM LTEA4U1UKL-CV240	3-WIRE ECOSYSTEM L3DA4U1UKL-CV240
SPECIFICATIONS		
MAXIMUM LOAD	5W-40W	5W-40W
INPUT VOLTAGE	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC
DIMENSIONS	4" X 4.89" X 2.62"	4" X 4.89" X 2.62"
CLASSIFICATION	CLASS 2	CLASS 2
T-BAR MOUNTING	NA	NA
DIMMING AND CONTROLS		
RADIO RA2	•	•
HOMEWORKS QS	•	•
PHPM-3F-120	•	•
PHPM-3F-DV	•	•
BCI-0-10	•	•

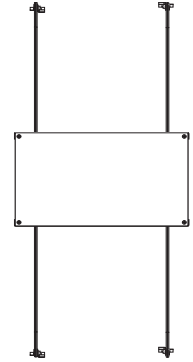


T-BAR Mounting Kit: Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4' of 14 gauge pair Teflon cables with quick secure connectors.

Ordering Code: L3D0-96W24V-U-TB


*Tunable White Color Temperature is compatible with 0-10V, ELV, DMX, and Lutron Hi-Lume® Power Supplies.

WIRING DIAGRAM: DMX Control with Lutron Grafik Eye Control Unit - PSB-100W-24VDC-2XK

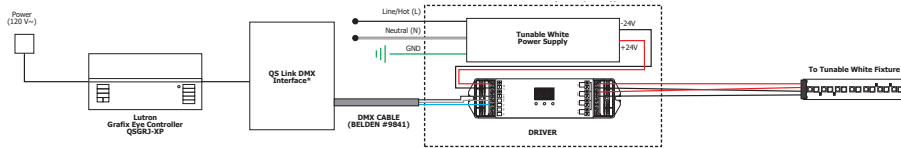

*PureEdge does not provide or sell this product

WIRING DIAGRAM: 0-10V Dimming with Lutron Grafik Eye Control Unit or Wall box controller - PSB-96W-010-24VDC-2XK

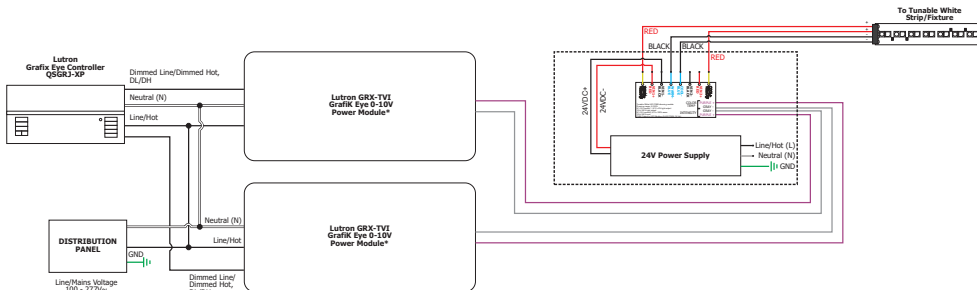

*PureEdge does not provide or sell this product

*PureEdge does not provide or sell this product

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--