


DALI TO WIZ INTERFACE

DALI TO WIZ INTERFACING MODULE

ASSEMBLED IN AMERICA

REV 07.15.25

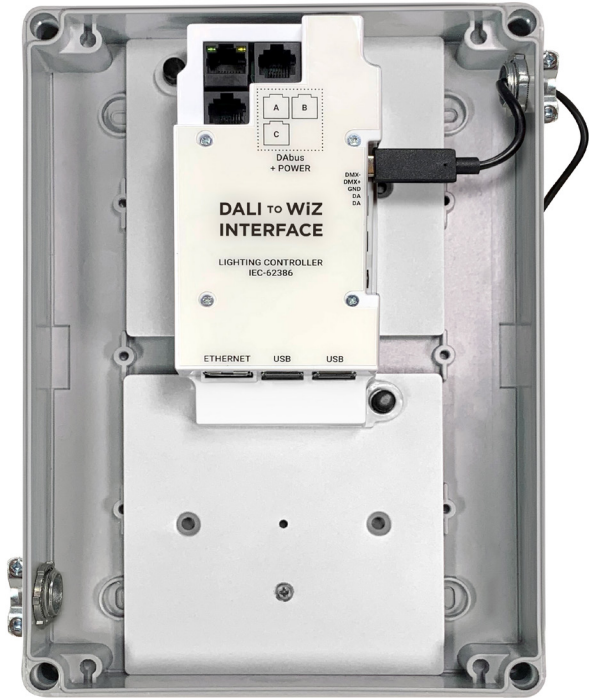

DESCRIPTION

This DALI to WIZ Interface allows for WIZ Pro-Enabled devices like the Pure Smart TruColor RGBTW smart bulbs to be controlled by any control/home-automation system with DALI compatibility. This could be a DALI gateway/interface, a DALI console, or a standalone DALI controller. The DALI to WIZ interface takes the DALI input and output a wireless Wi-Fi signal locally on the WLAN to the WIZ enabled device(s). The devices can then be named, addressed, and/or zoned however the application necessitates.

FEATURES

- Assign user defined names to each lamp or group
- Synchronize names and status with Alexa
- Create, edit and view scenes and groups
- Turn devices on/off, set brightness, color temp, manual set colors for tunable white or full color mixing
- Create schedules
- Detect power outages and manage as needed

APPLICATIONS

Indoor, Dry locations only

POWER INPUT (POWER SUPPLY INCLUDED)

USB-C Input (5v, 3A)

EFFICIENCY

90%

AMBIENT OPERATING TEMPERATURE

-20° C to 45° C

LIFETIME


50,000 hours

INSTALLATION

40 feet but can be extended with additional Wi-Fi access points.


CONNECTIVITY

Ethernet, Wifi 802.11 a/b/g/n, DALI, WIZ bulbs - up to 1000 bulbs

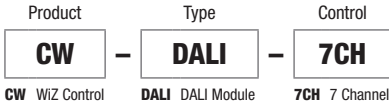

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

NETWORK TOPOLOGY & WIRING DIAGRAMS

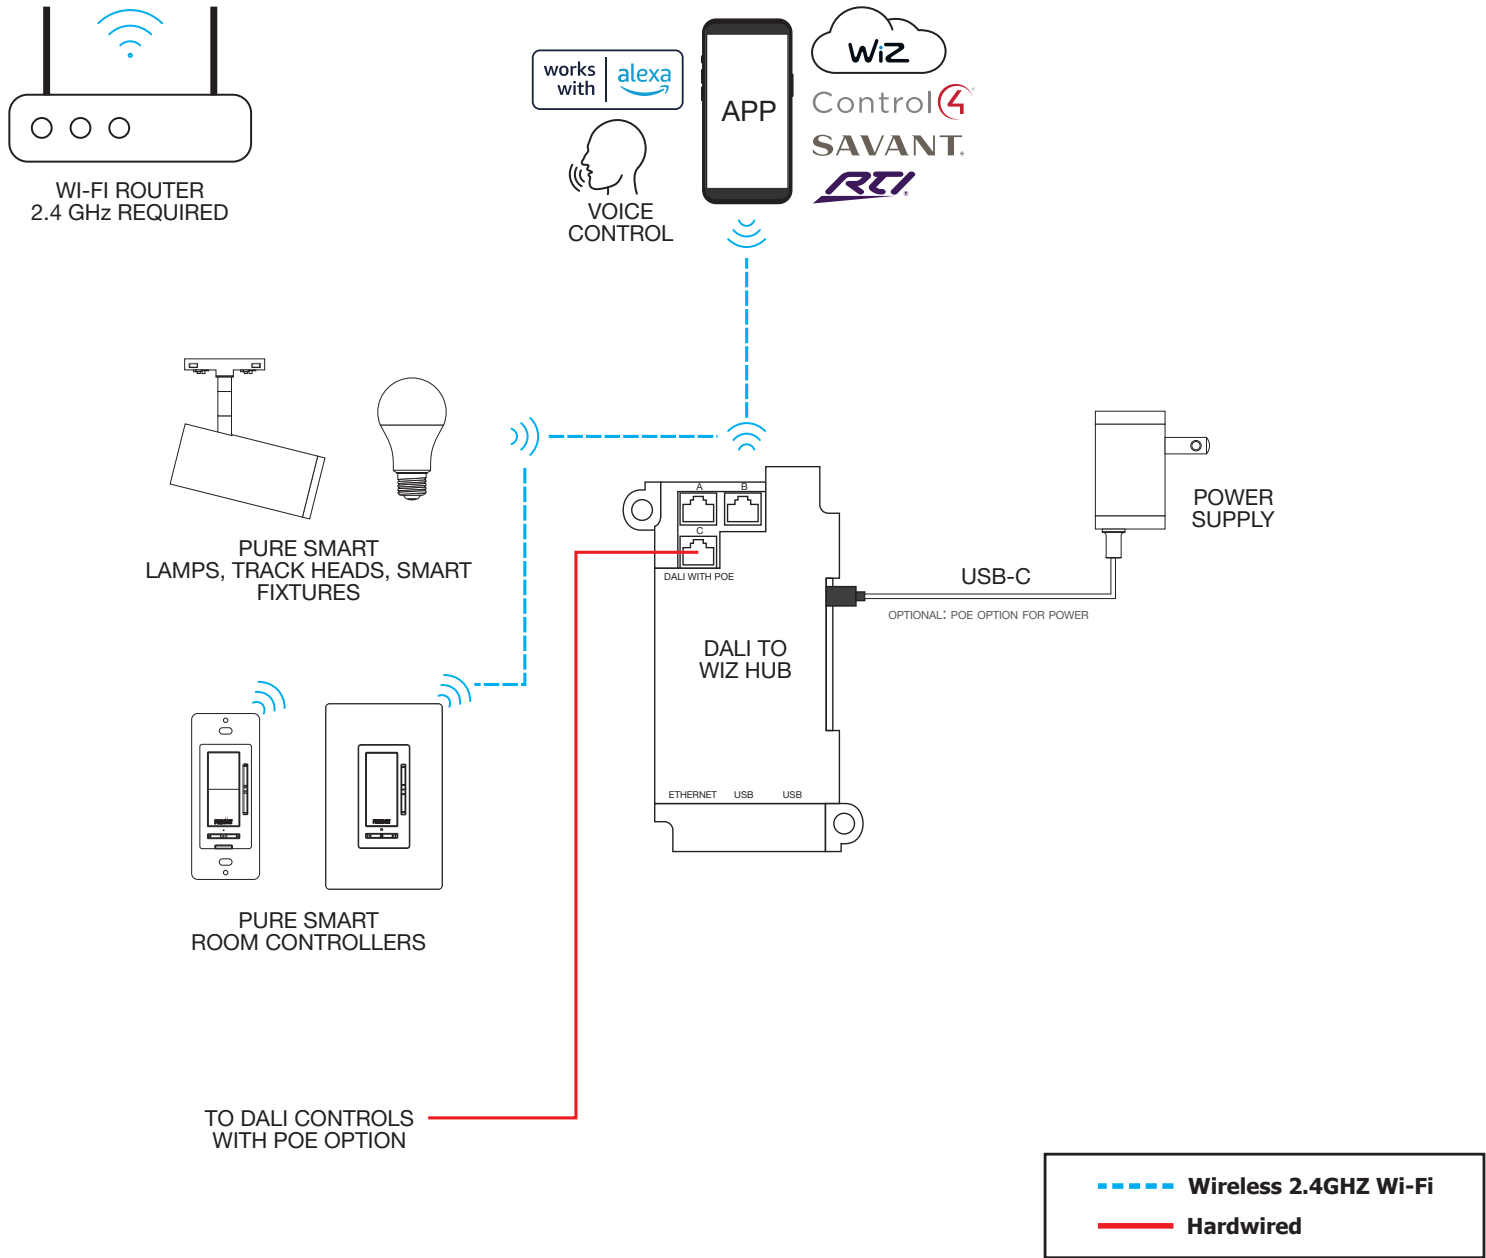

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--