

INDOOR POWER SUPPLIES

24VDC WITH DALI DRIVER



DESCRIPTION

Accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 100 watts. The integrated DALI Driver receives signals from a DALI-compatible controller (sold separately, by others). This controls color mixing and intensity for Static White, Static Color, RGB, RGB+W, Tunable White, and RGBTW. For static CCT, it controls light intensity for up to four separate systems. Power Supply features short circuit and overload protection. Indoor applications only.

POWER INPUT

120-277VAC, 50/60Hz

POWER OUTPUT

Class 2; 24 volts DC 100 watts maximum

EFFICIENCY

90%

COMPATIBLE CONTROLLERS

DALI-compatible controller (Sold separately, by others)

STANDARD MOUNTING

Surface mounted with knock-outs for conduit access

T-BAR MOUNTING KIT

Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4' of 14 gauge pair Teflon cables with quick secure connectors.

IN-WALL MOUNTING KIT

Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

APPLICATIONS

Indoor Location*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

COMPLIANCE

Assembled in the USA, ETL, RoHS, CE


Product	Wattage	Voltage	Type	Options
PSB	96W	24VDC	DALI	STANDARD (Leave Blank)
PSB Power Supply with Enclosure Box	96W 96 Watts 2X96W 2x96 Watts 3X96W 3x 96 Watts 4X96W 4x 96 Watts	24VDC 24 Volts	DALI DALI	IW In-Wall Kit TB T-Bar CP Chicago Plenum

INDOOR POWER SUPPLIES


24VDC WITH DALI DRIVER

100W


Top View

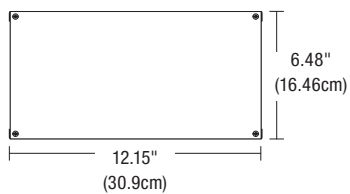


Side View



T-BAR GRID CEILING

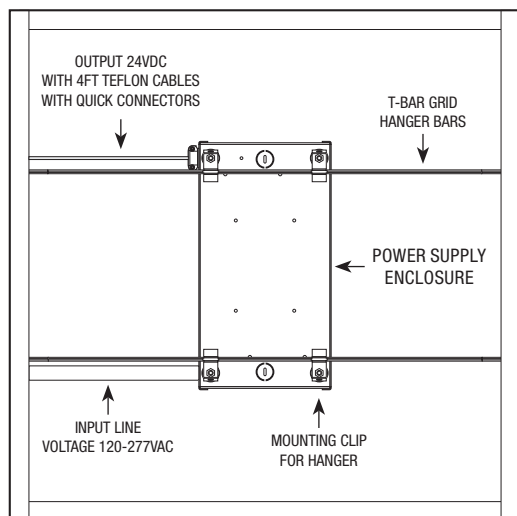

IN WALL KIT

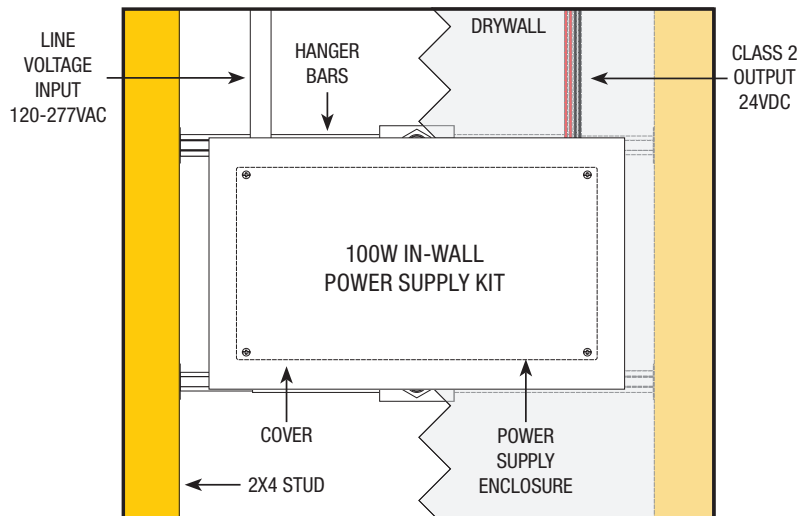

WIRING DIAGRAMS

STATIC WHITE

