



100W/24VDC OUTPUT, 57VDC INPUT POWER SUPPLY WITH DMX/DALI DRIVER, 1-4 CHANNELS



Top View

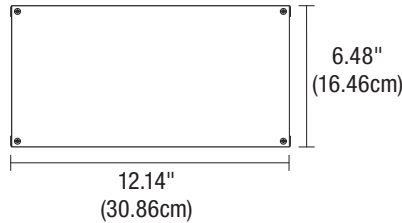

Side View

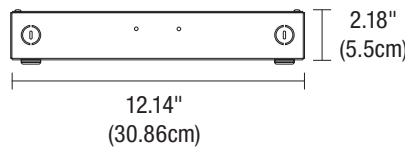

DESCRIPTION

Accepts input voltage in a range of 30 - 90VDC and outputs 24VDC power up to 100 watts. The integrated DC to DC Driver receives signals from any DMX or Dali controllers to control single color, Tunable, RGB, RGBW color mixing and light intensity. Standard static color temperature (when a single channel out of four is used). Indoor applications only.

APPLICATIONS

Indoor
To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. Not to be used with track heads or warm dim options.

POWER INPUT

30-90 volts DC

POWER OUTPUT

Class 2, 24 volts DC 4.16A 100 watt maximum

DIMENSIONS

12.18" x 6.5" x 2.18"

COMPATIBLE DMX CONTROLLERS



Touch Screen Controller with Power Supply (CTP), Color Dial Controller with Power Supply (CDP), DMX 1 Zone RGBW Touch Controller (CDMX1-RGBW), or Tunable White Touch Controller (CDMX1-2XK).

DALI CONTROLS TO BE SUPPLIED BY OTHERS

Product	Wattage	Dimming	Voltage	Options
PSB	100W	DD	24VDC	5
PSB Power Supply with Enclosure Box	100W 100 Watt	DD DMX or DALI	24VDC 24 Volt DC Output	5 30-90 VDC Input

100W/24VDC OUTPUT, 57VDC INPUT POWER SUPPLY WITH DMX/DALI DRIVER, 1-4 CHANNELS

DALI WIRING

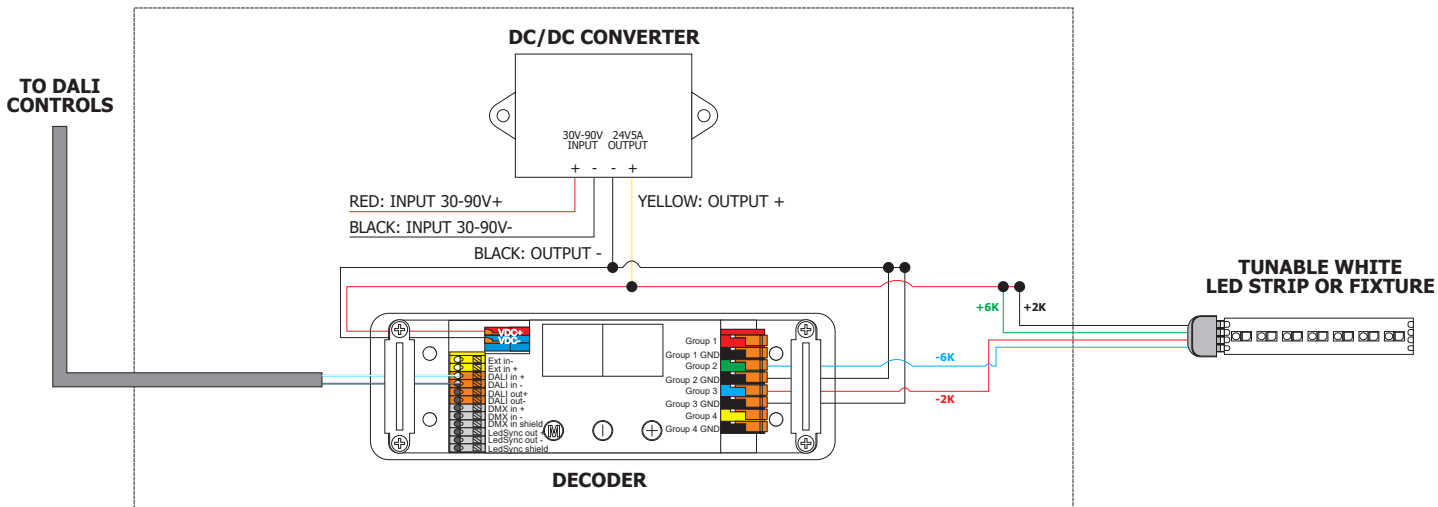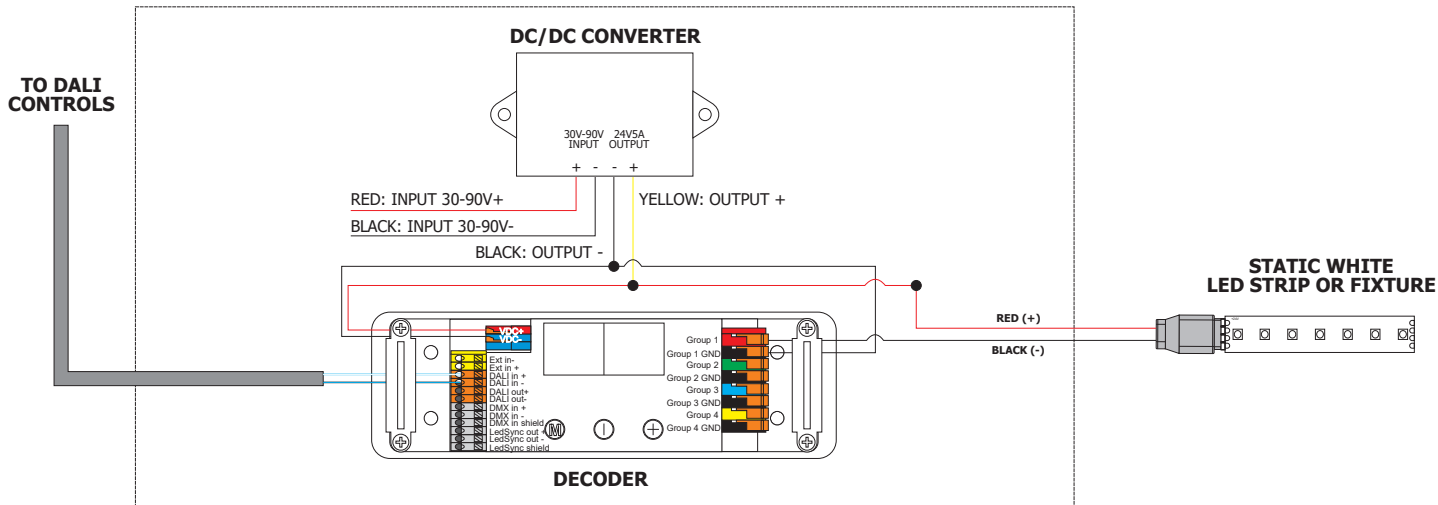

100W/24VDC OUTPUT, 57VDC INPUT POWER SUPPLY WITH DMX/DALI DRIVER, 1-4 CHANNELS

DMX WIRING

DMX

