



DESCRIPTION

Accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power at 100 and 2x100 watts. The integrated DALI-2™ Driver receives signals from a DALI-2™-compatible controller (sold separately, by others). This controls color mixing and intensity for Static White and Warm Dim fixtures. Power Supply features short circuit and overload protection. Indoor applications only.

POWER INPUT

120-277VAC, 50/60Hz

POWER OUTPUT

Class 2; 24 volts DC 2x4.16A at 100 and 2x100 watts maximum

EFFICIENCY

90%

COMPATIBLE CONTROLLERS

DALI-compatible controller (Sold separately, by others)

STANDARD MOUNTING

Surface mounted with knock-outs for conduit access

T-BAR MOUNTING KIT

Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4' of 14 gauge pair Teflon cables with quick secure connectors.

IN-WALL MOUNTING KIT

Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

APPLICATIONS

Indoor Location*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

COMPLIANCE


Assembled in the USA, ETL, CE

Product	Wattage	Type	Voltage	Options
PSB	100W	DALI2	24VDC	STANDARD (Leave Blank)
PSB Power Supply with Enclosure Box	100W 100 Watts 2X100 2x100 Watts	DALI2 DALI-2™	24VDC 24 Volts	IW* In-Wall Kit TB T-Bar CP Chicago Plenum *100 watt only


INDOOR POWER SUPPLIES

24VDC WITH INTEGRATED DALI-2™ DRIVER


100W

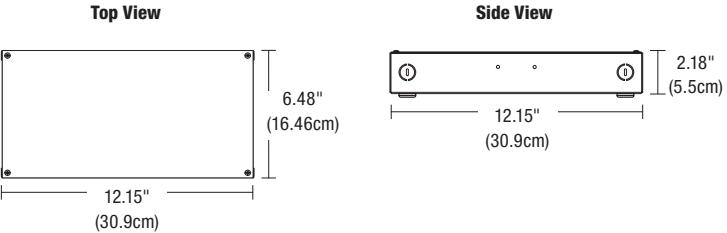

2X100W

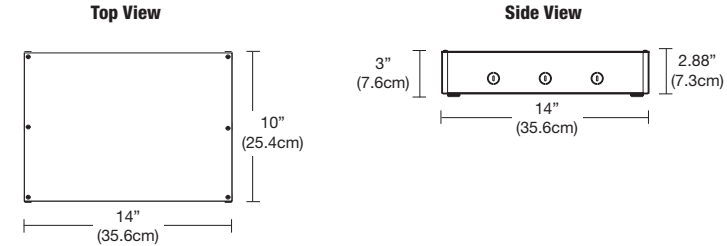

T-BAR GRID CEILING

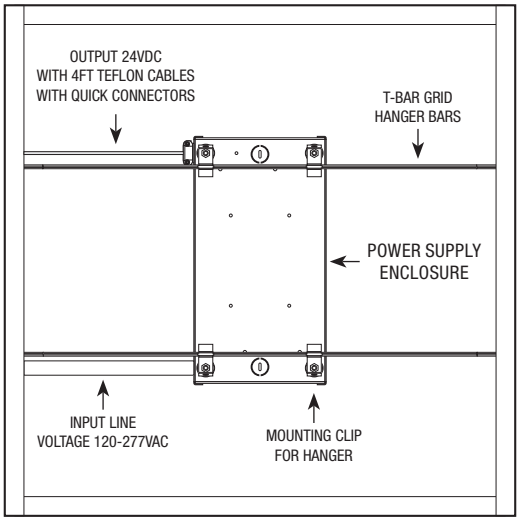

IN WALL KIT

