

**DESCRIPTION:**

Accepts input voltage of 120VAC and outputs 24VDC power up to 2x60 watts. Can be used as a dimmable or non-dim Power Supply\*. Power Supply features short circuit and overload protection. Indoor applications only.

\*Electrical Panels using Siemens/Murray AFCI breakers are not compatible with this ELV transformer. Use 0-10 Volt power supplies with this breaker.

\*\*ELV power supplies are not compatible with nLight, use only 0-10 volt or Uni driver power supplies

**APPLICATIONS: Indoor\***

\*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

**POWER INPUT:**

120 volts AC, 50/60Hz

**POWER OUTPUT:**

Class 2; 24 Volts DC 2 x 2.5A, 2x60 watts maximum

**DIMENSIONS:**



12.15" x 6.48" x 2.18"

**COMPATIBLE DIMMERS:**

Legrand: Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio RA 2

2X60W, 24VDC Low Voltage Wire Size Chart: 3% Voltage Drop

WIRE LENGTH (FT)	UP TO 53'	54'-82'	83'-137'
WIRE SIZE	14 AWG	12 AWG	10 AWG

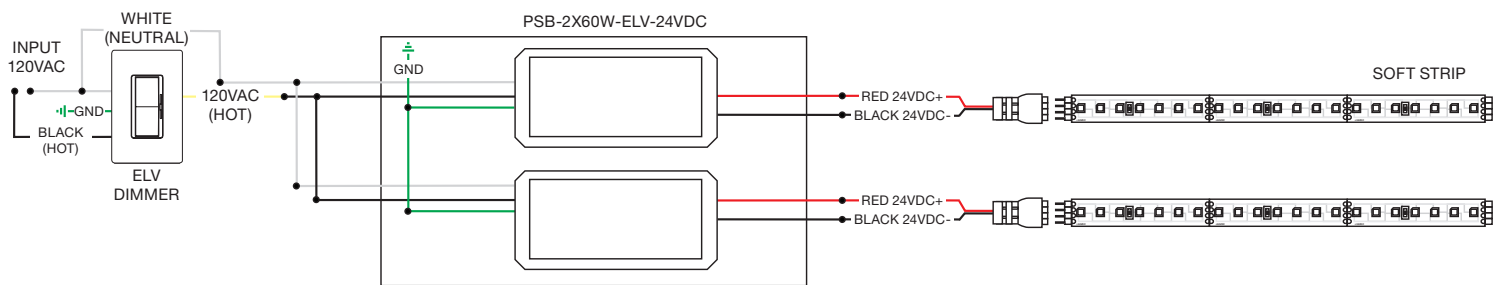

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------