

SCRIBBLE 360 MIYO, 24VDC REMOTE POWER

STATIC WHITE, WARM DIM, TUNABLE & TRUCOLOR RGBTW

ASSEMBLED IN AMERICA

REV 03.25.26



1D Diffused Flex

DESCRIPTION

Scribble 360 MIYO (Make-It-Your-Own) Suspension is a flexible, architectural lighting system that blends form and function to create continuous, 360-degree illumination without pixelation. Its sculptural, minimal design provides a striking visual element while delivering exceptional color rendering for a clean, uninterrupted glow.

Designed to offer both a sophisticated aesthetic and an inviting ambiance, Scribble 360 enhances interiors with its fluid, seamless flow. Choose from Static White, Warm Dim (27D & 30D), Tunable White (2K4K & 27K6), or TruColor RGBTW; our premier light engine with a wide spectrum from 1500K-6500K and exceptional color rendering (96+ CRI). TruColor RGBTW takes Tunable White to the next level. With the addition of the red, green, and blue channels to the tunable white, we're able to achieve a level of quality, performance, and accuracy that was previously unattainable. TruColor RGBTW can be controlled with either DMX or WiZ Pro wireless controls. With flexible configuration options and precision engineering, Scribble 360 serves as both a functional lighting solution and a design statement, making it the perfect solution for a wide range of applications. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

LUMEN PERFORMANCE AT 3000K 5W PER FOOT (1D)

LUMEN OUTPUT	775 lm/ft	EFFICIENCY	138 lm/watt
CRI	93+	Rg	98
BEAM ANGLE	360°	BEAM TOLERANCE	+/- 30CCT

SPECIFICATIONS

DIMENSIONS	DIA: 1C & 1D = 0.9"
INPUT	24VDC with 5" leads
POWER SUPPLIES	Remote 24VDC power supply required
POWER CONSUMPTION	5 or 7 watts per foot
MAX LENGTH	40' at 5 watts, 26' at 7 watts
BENDING	6" minimum radius
MATERIAL	UV Resistant Silicon
OPERATING TEMPERATURE	-4° F (-20° C) to 122° F (+50° C)
AVERAGE LED LIFE	50,000 hrs
WARRANTY	5 Year pro-rated

COMPLIANCE

*Title 24 JA8 compliant for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Assembled in USA.

LAMP

- Static White Color Temperatures ranging from **2400K** through **4000K**
- Warm Dim: **27D & 30D** dim down to 1800K, resembling halogen light sources
- Tunable White: **2K4K** and **27K6** grants independent control for adjusting color temperature and intensity
- **TruColor™ RGBTW** Dynamic RGB with Tunable White 1500K-6500K

REMOTE & CEILING MOUNT POWER SUPPLIES*, DIMMERS & CONTROLS

(SOLD SEPARATELY)

24VDC, Class 2 wiring

Static White

- Pure Smart™ WiZ Pro [Power Supplies & Smart Controls](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#) ELV & TRIAC [Smart Dimmer & Switch](#)
- [2-In-1 Power Driver And Dimmer \(ELV\)](#)

Warm Dim

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- **Make It Smart:** [Pure Smart™ Wi-Fi Dimmer](#)
- [2-In-1 Power Driver And Dimmer \(ELV\)](#)

Tunable White

- Pure Smart™ WiZ Pro [Power Supplies & Smart Controls](#)
- **0-10V:** Requires two dimmers, one for intensity and one for color temperature
- [DMX & Controls](#)
- [2-In-1 Power Driver And Dimmer \(ELV\)](#)

RGBTW

- [Home Integration Solutions](#)
 - Pure Smart™ WiZ Pro [Power Supplies & Smart Controls](#)
- *In-wall mounting and drop ceiling kits available for select power supplies

DIMMERS & CONTROLS (SOLD SEPARATELY)

Static White

- [5" Round ELV Power Canopy](#)

APPLICATIONS

Designed for indoor use only. Ideal applications include general lighting, residential, commercial, retail, and hospitality environments.

SCRIBBLE 360 MIYO, 24VDC REMOTE POWER

STATIC WHITE, WARM DIM, TUNABLE & TRUCOLOR RGBTW

ASSEMBLED IN AMERICA

REV 03.25.26

TRAPEZE 360 OPTION EXAMPLES




1C Cora Weave Flex



1D Diffused Flex

COVER FINISHES

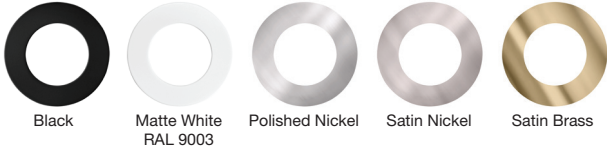

Black


Matte White
RAL 9003

Polished Nickel

Satin Nickel

Satin Brass

360 ILLUMINATION



$\varnothing 0.90"$ (2.3cm)
 1D & 1C




SCRIBBLE CEILING HORIZONTAL

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 03.25.26

Scribble Ceiling/Wall

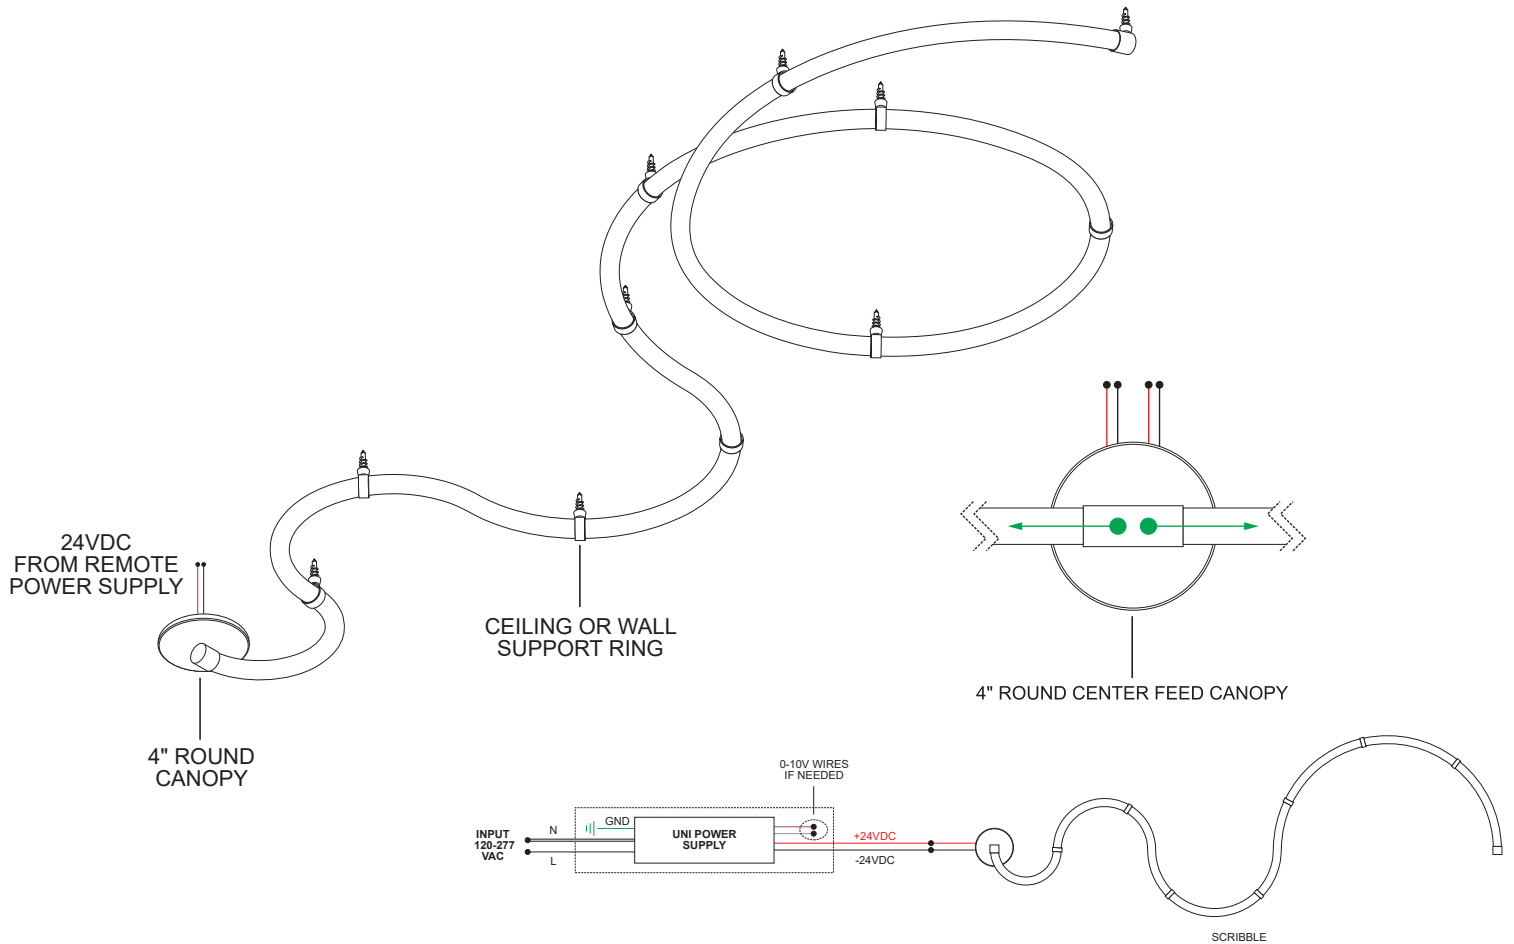

System	Type	Wattage	Canopy	Length in Feet*	Color Temperature	Canopy, End Cap, and Support Ring Finishes
SBCHR	1C	7W	4R	10	30K	SN
SBCHR Scribble Ceiling Horizontal, Remote Power	1C Cora Weave Flex, 0.9" Diameter 1D Diffused Flex, 0.9" Diameter	5W 5 watts per foot 7W 7 watts per foot	4R 4.6" Round Canopy	5-40 (5W) – Over 20ft requires Center Feed 4.6" Round Canopy 5-26 (7W) – Over 13ft requires Center Feed 4.6" Round Canopy *Custom lengths available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K* Tunable White 2000K-4000K 27K6** Tunable White 2700K-6500K TC** TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *REMOTE POWER ONLY **5W ONLY AND REMOTE POWER ONLY	BK Black BKC Black with Clear Support Ring MW Matte White RAL 9003 MWC Matte White RAL 9003 with Clear Support Ring SB Satin Brass SBC Satin Brass with Clear Support Ring SN Satin Nickel SNC Satin Nickel with Clear Support Ring PN Polished Nickel PNC Polished Nickel with Clear Support Ring



1C Cora Weave Flex



1D Diffused Flex

CEILING SUPPORT RING FINISHES

One ring supplied with every two feet of lens



FN360-1F-CR-CL **FN360-1F-CR-BK** **FN360-1F-CR-SB** **FN360-1F-CR-SN** **FN360-1F-CR-PN**


*RAL/... Specify ral powder coat code (ex: #ral/9007) additional finishes are available with an extended lead time. custom quotation is required prior to ordering.

SCRIBBLE SUSPENSION HORIZONTAL

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 03.25.26

Scribble Suspension

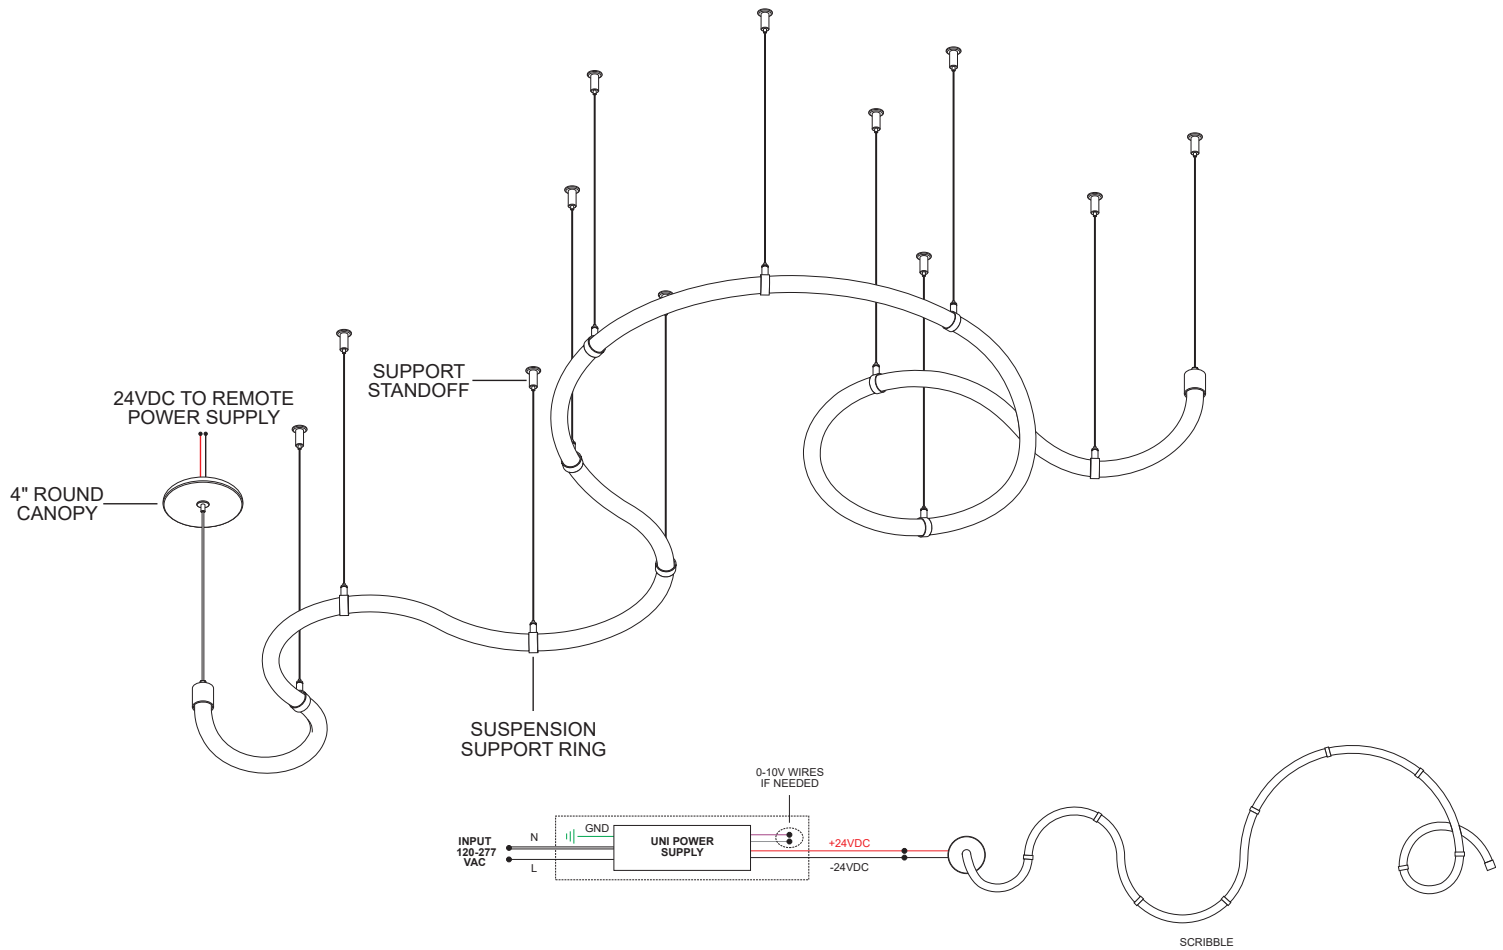

System	Type	Wattage	Canopy	Length in Feet*	Color Temperature	Canopy and End Cap
SBSVR	1C	7W	4R	10	24K	SN
SBSVR Scribble Suspension Vertical, Remote Power	1C Cora Weave Flex, 0.9" Diameter 1D Diffused Flex, 0.9" Diameter	5W 5 watts per foot 7W 7 watts per foot	2R 2.8" Round Canopy 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point 2.0" Millwork Flush-Mount Canopy	5-40 (5W) – Over 20ft requires Center Feed 4.6" Round Canopy 5-26 (7W) – Over 13ft requires Center Feed 4.6" Round Canopy *Custom lengths available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K* Tunable White 2000K-4000K 27K6** Tunable White 2700K-6500K TC** TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *REMOTE POWER ONLY **5W ONLY AND REMOTE POWER ONLY	BK Black BKC Black with Clear Support Ring MW Matte White RAL 9003 MWC Matte White RAL 9003 with Clear Support Ring SB Satin Brass SBC Satin Brass with Clear Support Ring SN Satin Nickel SNC Satin Nickel with Clear Support Ring PN Polished Nickel PNC Polished Nickel with Clear Support Ring



1C Cora Weave Flex



1D Diffused Flex

SUSPENSION SUPPORT RING FINISHES

One ring supplied with every two feet of lens



SCRIBBLE 360 MIYO, 24VDC REMOTE POWER

STATIC WHITE, WARM DIM, TUNABLE & TRUCOLOR RGBTW

REV 03.25.26

360 ACCESSORIES



FN360-1F-CR-CL



FN360-1F-CR-BK



FN360-1F-CR-SB



FN360-1F-CR-SN



FN360-1F-CRD-PN

FLEX 360 CEILING SUPPORT RING

System	Diameter	Type	Finish
FN360	1F	CR	CL
FN360 Flex Neon 360	1F 1" Dia. Flex	CR Ceiling Ring CRD Ceiling Ring Dual	CL* Clear BK Black SB Satin Brass SN Satin Nickel PN Polished Nickel



*Not available in CRD



FN360-1F-SR-CL



FN360-1F-SR-BK



FN360-1F-SR-SB



FN360-1F-SR-SN



FN360-1F-SRD-PN

FLEX 360 SUSPENSION SUPPORT RING

Includes anchor and 12' of aircraft cable.

System	Diameter	Type	Finish
FN360	1F	SR	CL
FN360 Flex Neon 360	1F 1" Dia. Flex	SR Suspension Ring SRD Suspension Ring Dual	CL* Clear BK Black SB Satin Brass SN Satin Nickel PN Polished Nickel



*Not available in SRD



FN360-1F-JC



FN360-1F-JCC



CL



BK



MW



SB



SN



PN

FLEX 360 FREE FORM END JOINER

System	Diameter	Product	Finish
FN360	1F	JC	CL
FN360 Flex Neon 360	1F 1" Dia. Flex	JC Joiner Flex Clip JCC Joiner Clip Ceiling	CL Clear BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel

FLEX 360 FREE FORM SUSPENSION JOINER FOR ENDS

System	Diameter	Product	Finish
FN360	1F	JSC	CL
FN360 Flex Neon 360	1F 1" Dia. Flex	JSC Joiner Clip Suspension	CL Clear BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel



CL



BK



MW



SB



SN



PN

360 ACCESSORIES



FLEX 360 INVISIBLE CLIP

System	Diameter	Product
FN360	1F	INVCL
FN360 Flex Neon 360	1F 1" Dia. Flex	INVCL Invisible Clip




FLEX 360 PUSH IN CLIP

System	Diameter	Product
FN360	1F	PCL
FN360 Flex Neon 360	1F 1" Dia. Flex	PCL Push in Clip



FLEX 360 PUSH IN 3FT CHANNEL

System	Diameter	Length	Product
FN360	1F	3FT	PCH
FN360 Flex Neon 360	1F 1" Dia. Flex	3FT 3' Long Channel	PCH Push In Channel

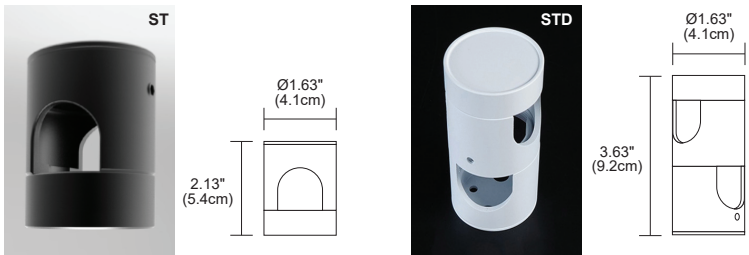

STANDOFF FOR 1" FLEX 360



Create your own freeform design.

System	Diameter	Product	Finish
FN360	1F	ST	BK
FN360 Flex 360	1F 1" Flex	ST 1" Dia. Standoff STD 1" Dia. Dual Standoff	BK Black MW Matte White XX Custom*

*RAL/_ specify ral powder coat code (ex: #ral/9007) additional finishes are available with an extended lead time. custom quotation is required prior to ordering.

Wall Mounted:

Ceiling Mounted:

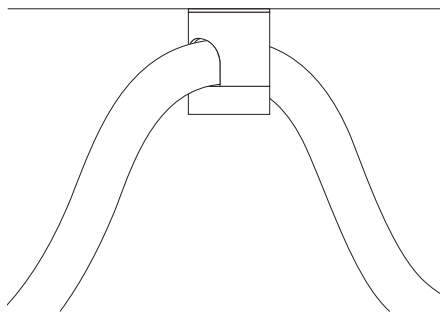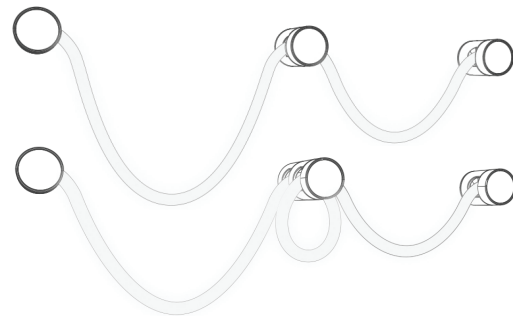

7" ROUND CEILING/WALL 24V REMOTE POWER FEED CANOPY

Can be used as a 24V end power feed from the ceiling or wall, or as a freeform anchor point for wrapping the 360 Flex. Fits over standard 4" square electrical box with round plaster ring.

System	Diameter	Product	Finish
FN360	1F	7RDC	BK
FN360 Flex 360	1F 1" Flex	7RDC 7" Round Ceiling/Wall Canopy	BK Black MW Matte White XX Custom*

*RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.

MONOPOINT CANOPY OPTIONS

VANISHING POINT	2" ROUND CANOPY	4" ROUND CANOPY	5" ROUND 96W POWER CANOPY
<p>PLASTER-IN, NO VISIBLE CANOPY</p> <p>2-1/8" Deep Junction Box with Vanishing Point J-Box Cover</p> <p>Drywall</p> <p>Grip Jack 0.2" (0.5cm)</p> <p>Canopy Cover 2" (5.1cm)</p> <p>Plaster over Canopy Cover 2" (5.1cm)</p> <p>Grip Jack 0.2" (0.5cm)</p> <p>VR</p>	<p>2.7" (6.9cm)</p> <p>0.25" (0.6cm)</p> <p>2.7" (6.9cm)</p> <p>2R</p>	<p>4.6" (11.7cm)</p> <p>0.32" (8.3cm)</p> <p>4.6" (11.7cm)</p> <p>4.6" (11.7cm)</p> <p>4R</p>	<p>Ø5.13" (13cm)</p> <p>1.38" (3.5cm)</p> <p>Ø5.13" (13cm)</p> <p>5R</p>

4 Inch Canopy (Not Included)

4.13" (10.5cm)

0.75" (1.9cm)

3.6" (9.1cm)

CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK
 Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel suspension when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, and 4R Power Canopies (Canopy not included).

Product	Type	Finish
CS	ADJ-DP-SWAG	SN
CS Channel Suspension	ADJ-SWAG Adjustable Swag Hook for Static White ADJ-DP-SWAG Dual Post Adjustable Swag Hook for 2K4K & RGB	SN Satin Nickel

0.75" (1.9cm)

0.91" (2.3cm)

0.15" (0.4cm)

0.13" (0.3cm)

0.5" (1.3cm)

0.08" (0.2cm)

0.55" (1.4cm)

0.11" (0.3cm)

CHANNEL SUSPENSION SWAG HOOK
 The clear plastic Swag Hook extends a cable from a ceiling or an electrical box that is not located directly above desired fixture location.

System	Type
CS	SWAG
CS Channel Suspension	SWAG Swag Hook

1.1" (2.8cm)

2.4" (6cm)

Adjustable

1.1" (2.8cm)

1.1" (2.8cm)

0.5" (1.3cm)


Adjustable Power

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP
 Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Available in Satin Black or White with Satin Nickel Hardware as Adjustable Power and Non-Power versions.


Product	Type	Options	Finish
CS	TBAR	A	W
CS Channel Suspension	TBAR 9/16" and 15/16"	A Adjustable AP Adjustable Power	W White BK Satin Black

STATIC WHITE AND WARM DIM

WIRING DIAGRAM: Single Junction Box

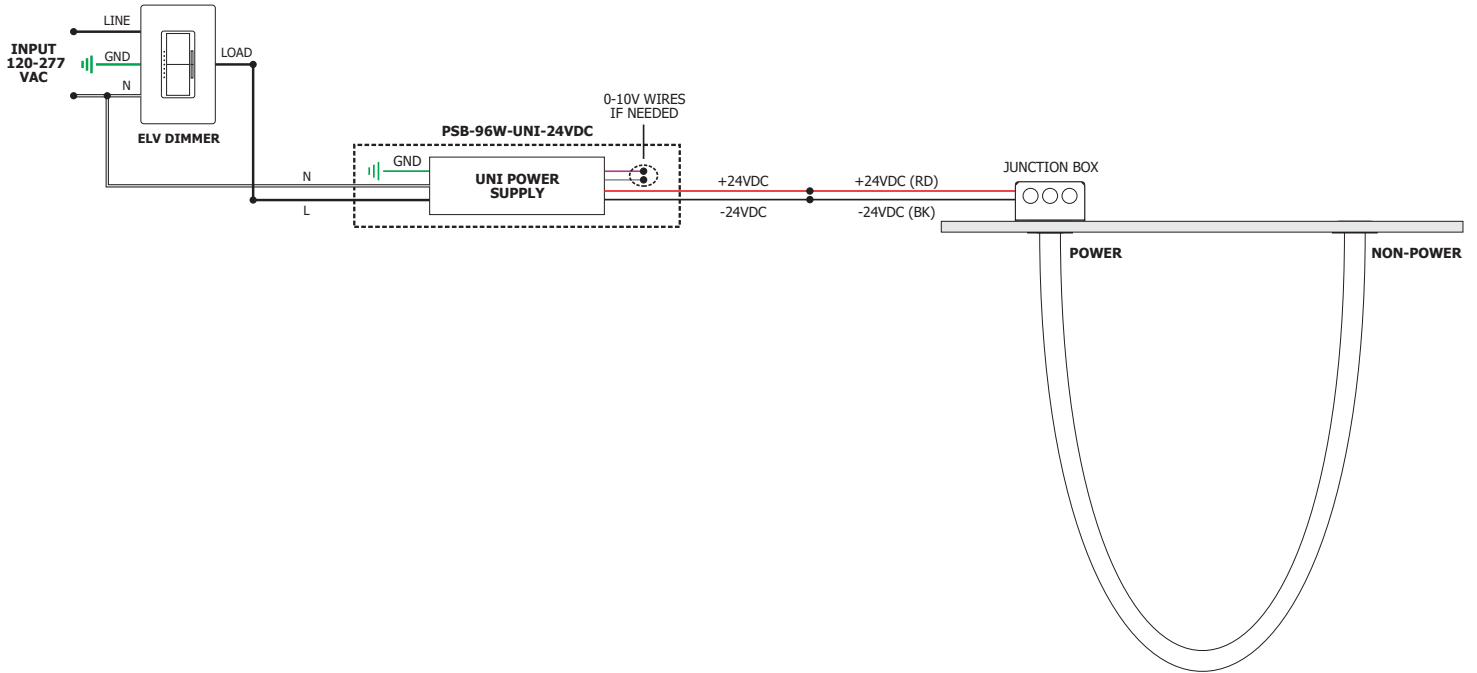


WIRING DIAGRAM: 0-10V

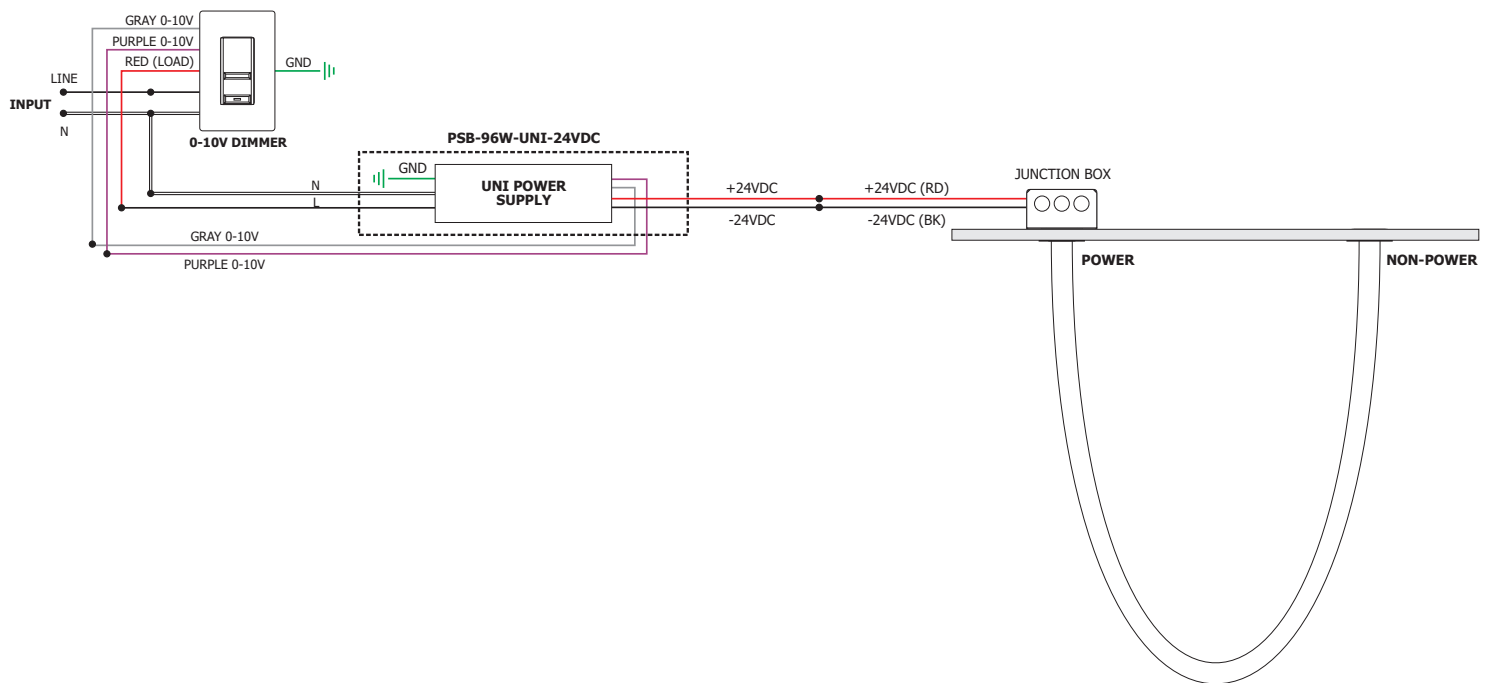


STATIC WHITE AND WARM DIM

WIRING DIAGRAM: Pure Smart

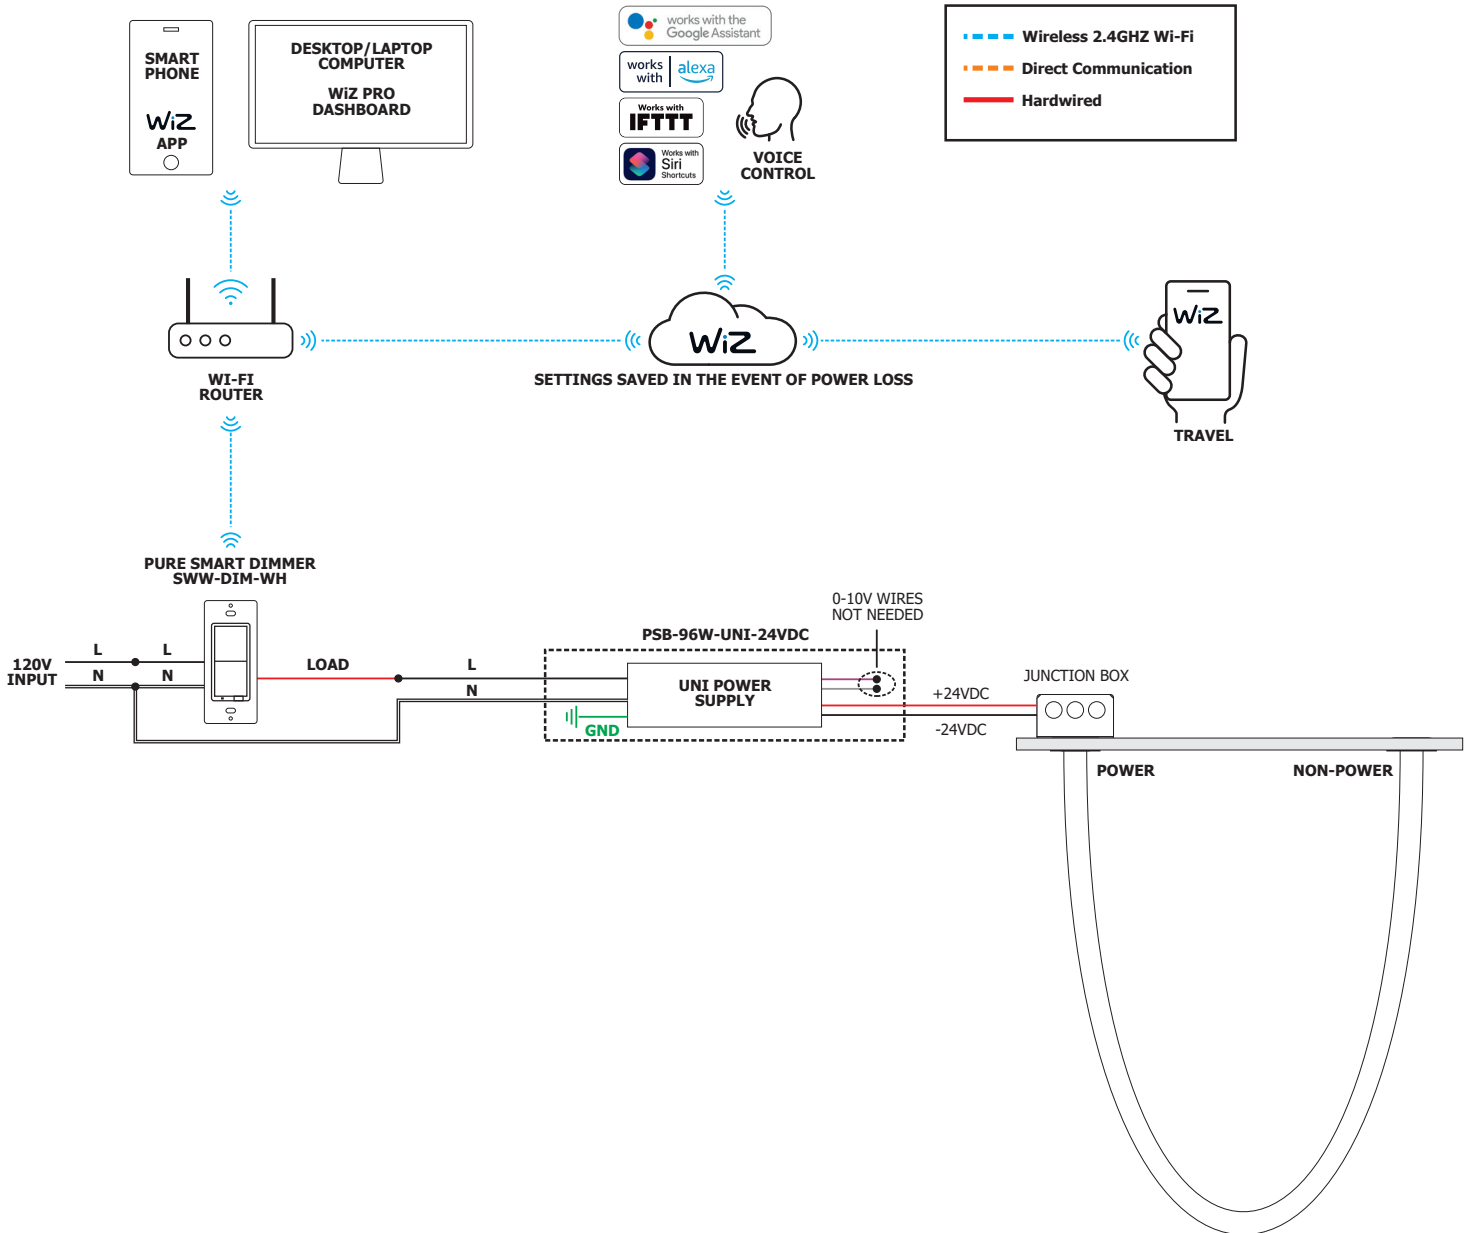


TUNABLE WHITE

WIRING DIAGRAM: DMX Dimming

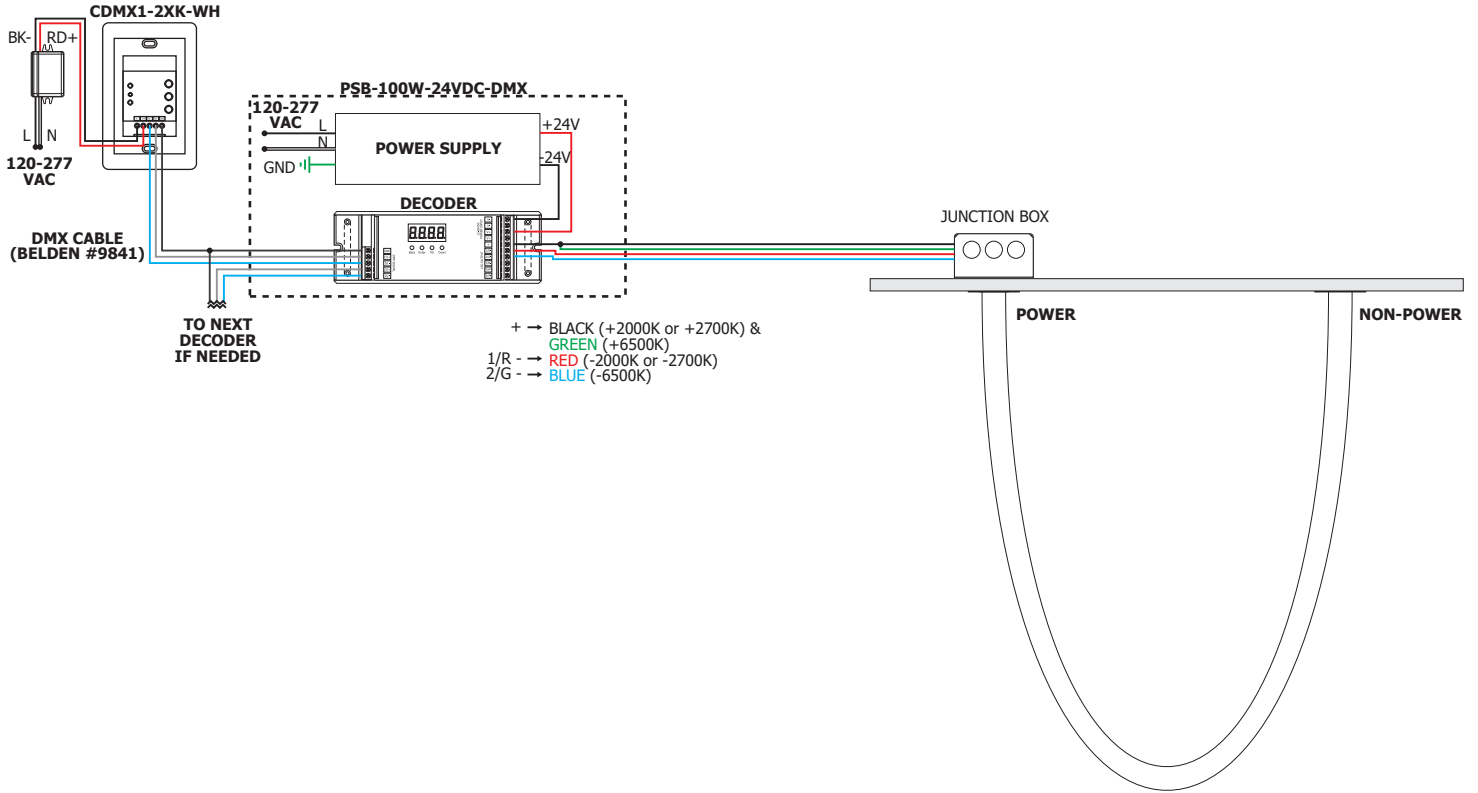


WIRING DIAGRAM: 0-10V

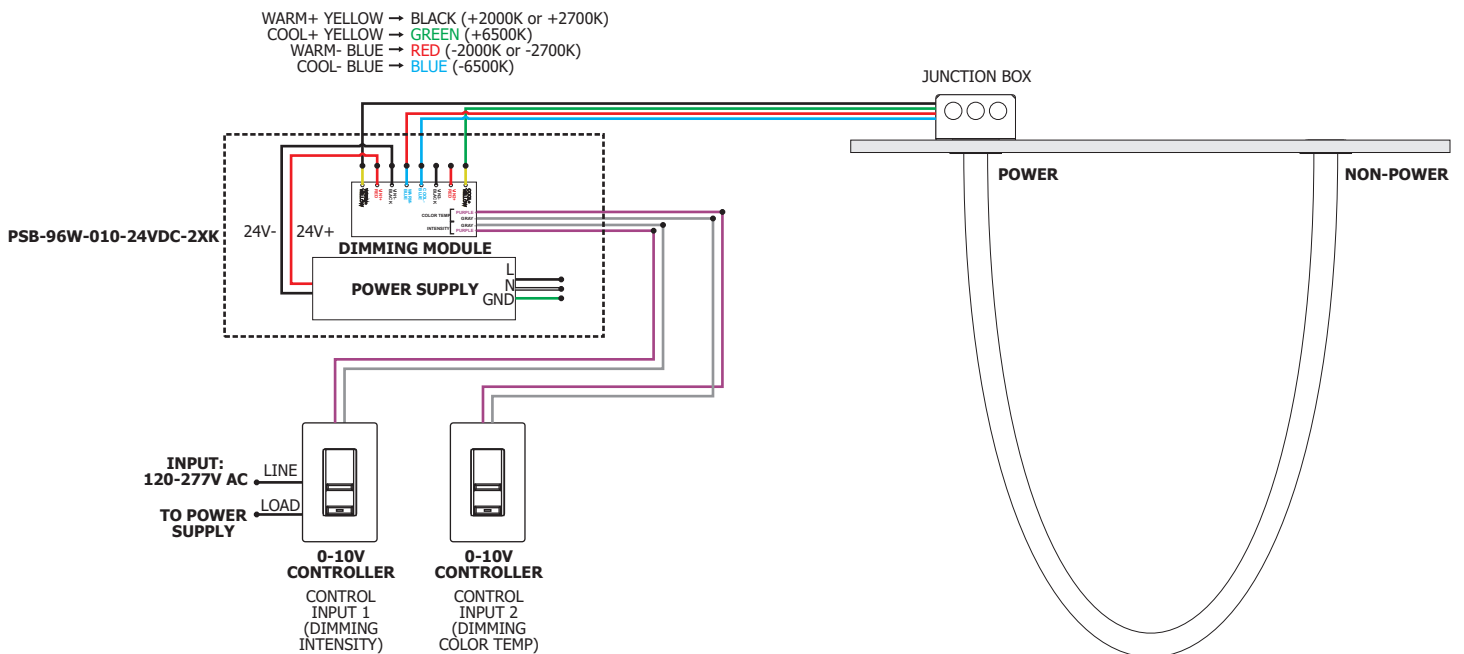


TUNABLE WHITE

WIRING DIAGRAM: Pure Smart Connected by WiZ

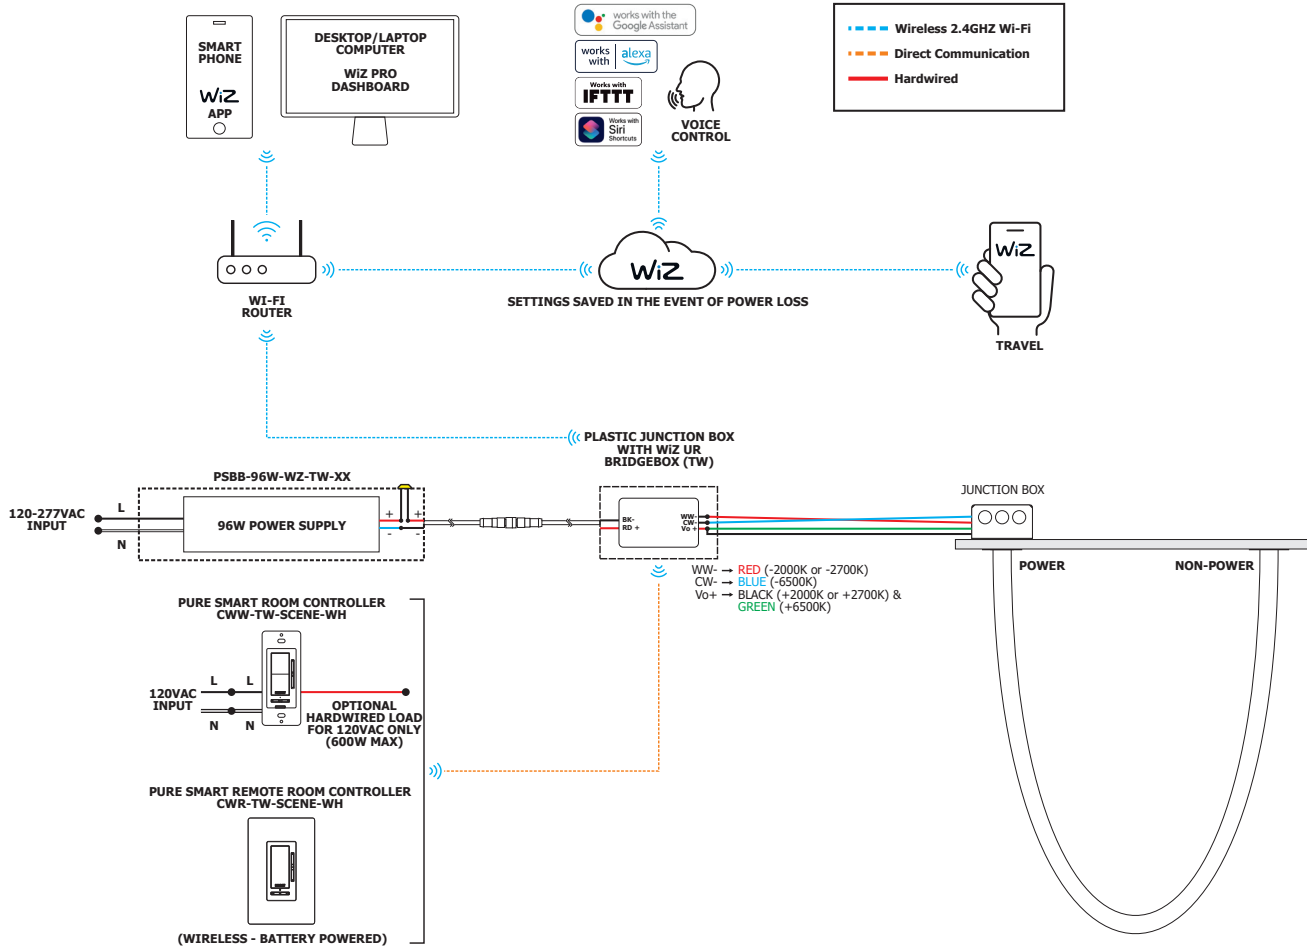


WIRING DIAGRAM: DALI

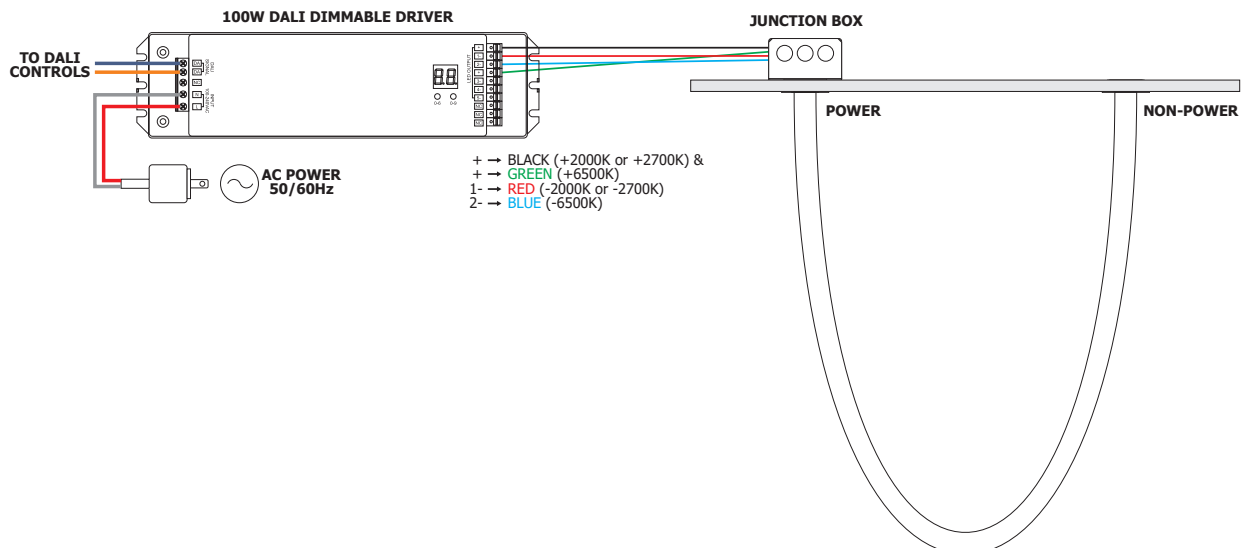


TRUCOLOR

WIRING DIAGRAM: Pure Smart Connected by WiZ

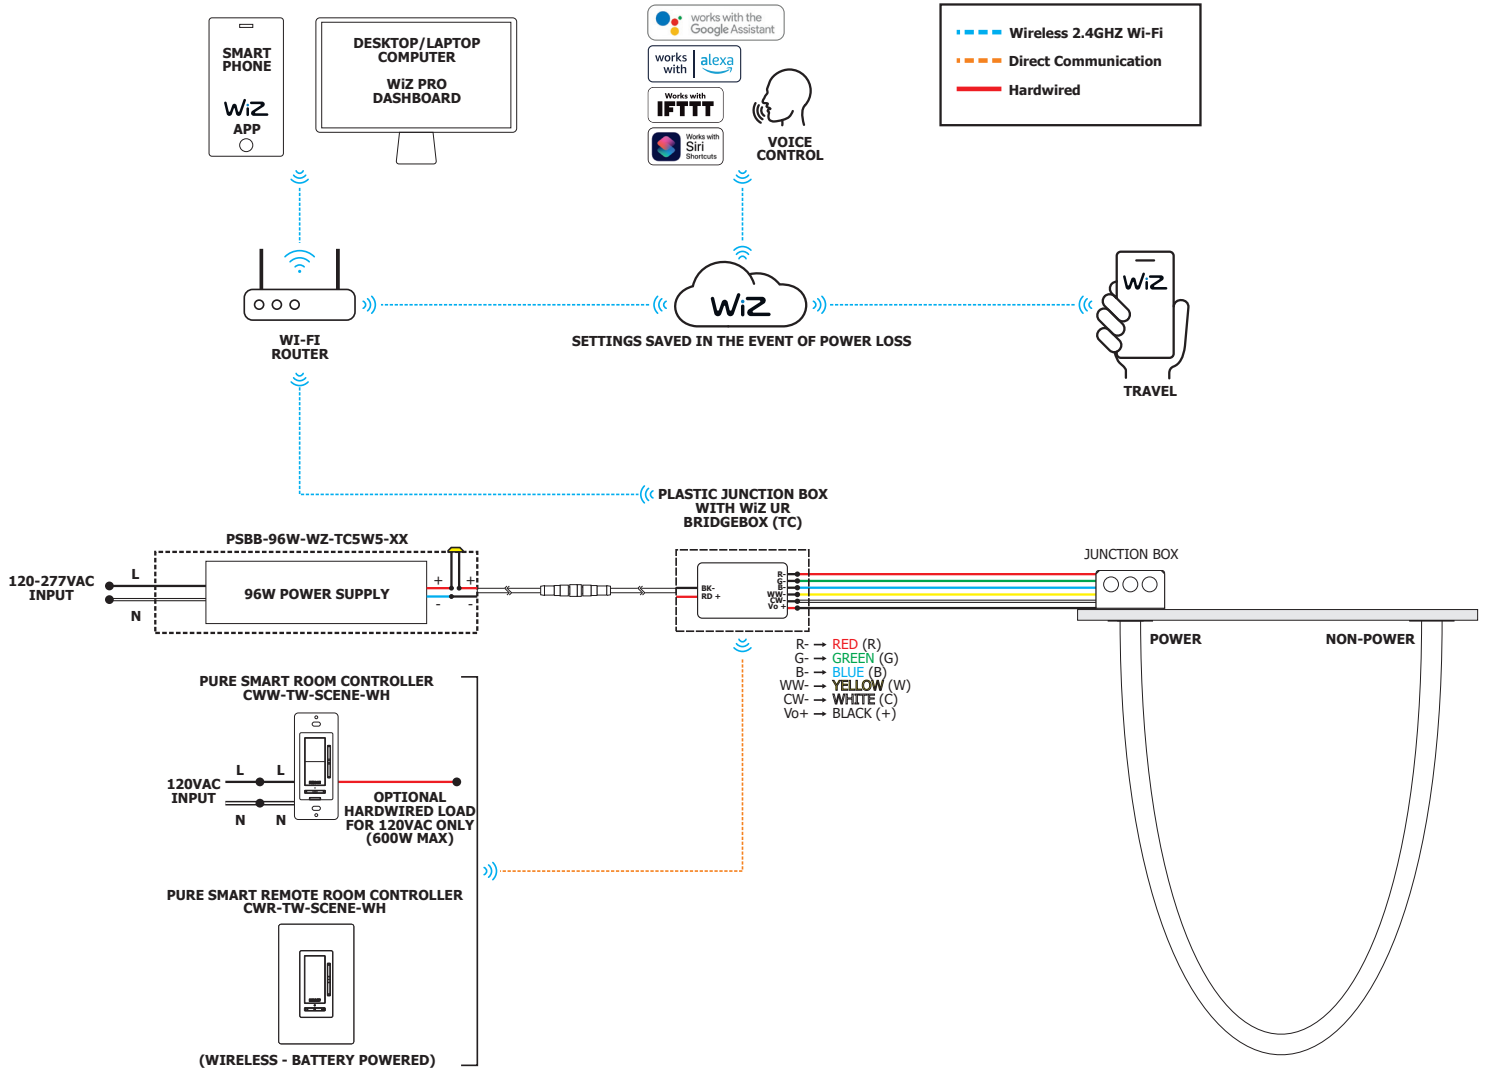

TRUCOLOR

WIRING DIAGRAM: Pure Smart Integration

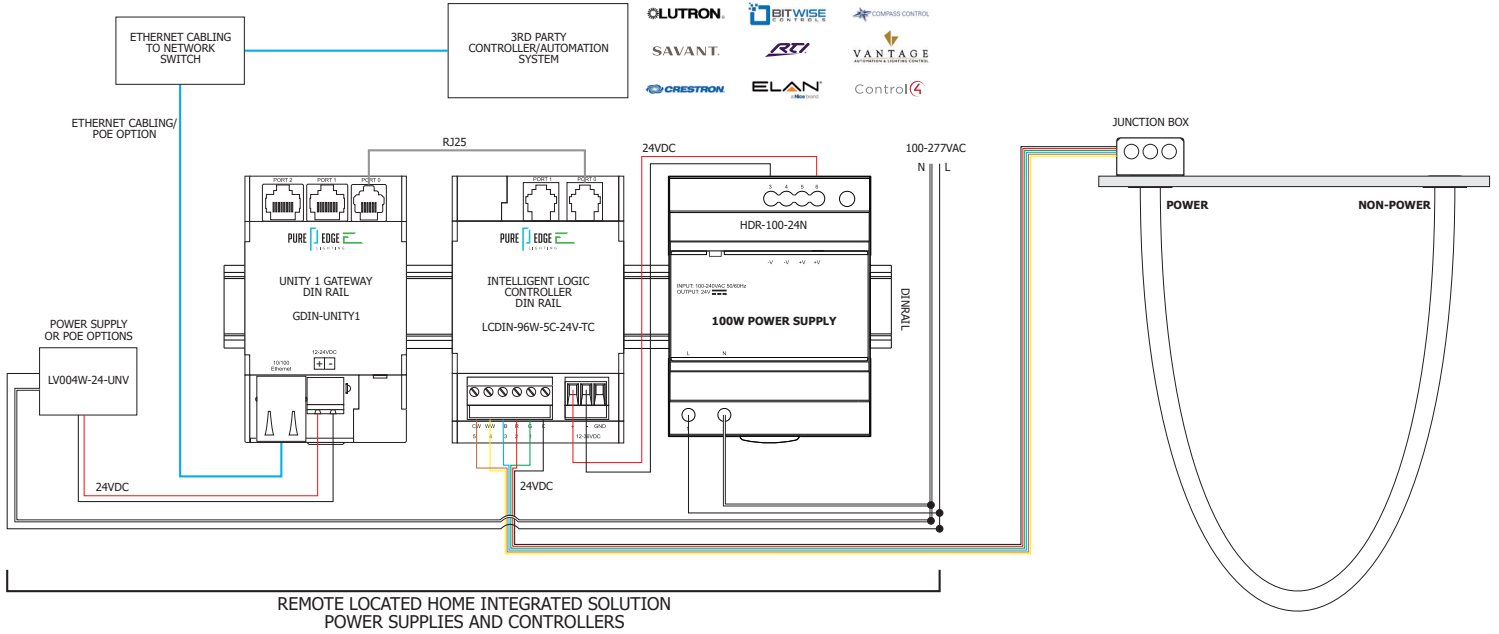

SCRIBBLE 360 MIYO, 24VDC REMOTE POWER

STATIC WHITE, WARM DIM, TUNABLE & TRUCOLOR RGBTW

NOMINAL DELIVERED LUMENS

1C CORA WEAVE FLEX - STATIC WHITE & WARM DIM														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	642	661	355	680	375	652	822	924	967	502	978	543	943	1183
LUMENS PER WATT (lm/w)	112	117	63	121	65	120	151	111	121	60	120	66	117	146
CRI	95+	94+	95+	93+	96+	93+	93+	96+	94+	96+	93+	95+	93+	93+

1D DIFFUSED FLEX - STATIC WHITE & WARM DIM														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	732	754	405	775	428	743	937	1054	1103	572	1114	619	1074	1349
LUMENS PER WATT (lm/w)	128	133	71	138	74	137	172	126	138	69	137	75	133	167
CRI	95+	94+	95+	93+	96+	93+	93+	96+	94+	96+	93+	95+	93+	93+

2C CORA WEAVE FLEX - STATIC WHITE & WARM DIM														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	673	694	372	713	394	684	863	970	1015	527	1026	570	989	1241
LUMENS PER WATT (lm/w)	117	122	66	127	68	126	158	116	127	63	126	69	122	153
CRI	95+	94+	95+	93+	96+	93+	93+	96+	94+	96+	93+	95+	93+	93+

2D DIFFUSED FLEX - STATIC WHITE & WARM DIM														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	763	786	422	808	446	775	977	1099	1150	597	1162	646	1120	1406
LUMENS PER WATT (lm/w)	133	138	75	144	77	142	179	132	144	72	143	78	138	174
CRI	95+	94+	95+	93+	96+	93+	93+	96+	94+	96+	93+	95+	93+	93+

1C CORA WEAVE FLEX - 2K4K TUNABLE WHITE														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	258	334	334	337	351	403	393	415	549	549	554	578	663	629
LUMENS PER WATT (lm/w)	55	69	67	66	67	77	76	59	76	74	73	74	86	82
CRI	93+	93+	93+	96+	96+	93+	93+	93+	93+	93+	96+	96+	93+	93+

1D DIFFUSED FLEX - 2K4K TUNABLE WHITE														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	294	380	380	384	400	459	448	473	625	625	632	658	755	717
LUMENS PER WATT (lm/w)	62	78	76	75	76	88	86	67	87	85	83	85	98	94
CRI	93+	93+	93+	96+	96+	93+	93+	93+	93+	93+	96+	96+	93+	93+

2C CORA WEAVE FLEX - 2K4K TUNABLE WHITE														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	271	350	350	354	369	423	412	436	576	576	582	606	695	660
LUMENS PER WATT (lm/w)	57	72	70	69	70	81	79	62	80	78	77	78	90	86
CRI	93+	93+	93+	96+	96+	93+	93+	93+	93+	93+	96+	96+	93+	93+

2D DIFFUSED FLEX - 2K4K TUNABLE WHITE														
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	307	397	397	401	417	479	467	493	652	652	659	686	787	747
LUMENS PER WATT (lm/w)	65	82	80	79	80	92	90	70	90	88	87	88	102	98
CRI	93+	93+	93+	96+	96+	93+	93+	93+	93+	93+	96+	96+	93+	93+

SCRIBBLE 360 MIYO, 24VDC REMOTE POWER

STATIC WHITE, WARM DIM, TUNABLE & TRUCOLOR RGBTW

1C CORA WEAVE FLEX - 27K6 TUNABLE WHITE									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K		
LUMENS PER FOOT (lm/ft)	214	254	261	268	293	315	300		
LUMENS PER WATT (lm/w)	54	51	52	54	59	63	75		
CRI	94+	93+	92+	92+	92+	92+	91+		

1D DIFFUSED FLEX - 27K6 TUNABLE WHITE									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K		
LUMENS PER FOOT (lm/ft)	244	290	298	306	334	359	342		
LUMENS PER WATT (lm/w)	49	46	48	49	53	58	68		
CRI	94+	93+	92+	92+	92+	92+	91+		

2C CORA WEAVE FLEX - 27K6 TUNABLE WHITE									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K		
LUMENS PER FOOT (lm/ft)	225	267	274	281	307	331	315		
LUMENS PER WATT (lm/w)	44	42	43	44	49	52	62		
CRI	94+	93+	92+	92+	92+	92+	91+		

2D DIFFUSED FLEX - 27K6 TUNABLE WHITE									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K		
LUMENS PER FOOT (lm/ft)	254	302	310	319	348	375	357		
LUMENS PER WATT (lm/w)	48	45	47	48	52	56	67		
CRI	94+	93+	92+	92+	92+	92+	91+		

1C CORA WEAVE FLEX - TRUCOLOR RGBTW									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	98	111	115	122	127	136	139	111	104
LUMENS PER WATT (lm/w)	19	22	24	28	30	30	29	28	35
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+

1D DIFFUSED FLEX - TRUCOLOR RGBTW									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	112	126	131	139	145	155	158	127	119
LUMENS PER WATT (lm/w)	21	25	27	32	34	34	33	32	40
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+

2C CORA WEAVE FLEX - TRUCOLOR RGBTW									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	103	116	121	128	133	143	145	117	109
LUMENS PER WATT (lm/w)	19	23	25	29	31	32	30	29	36
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+

2D DIFFUSED FLEX - TRUCOLOR RGBTW									
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	117	132	137	145	151	162	165	132	124
LUMENS PER WATT (lm/w)	22	26	29	33	35	36	34	33	41
CRI	92+	94+	95+	95+	96+	97+	97+	92+	90+


LED STRIP TM30 DATA

5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%


LED STRIP TM30 DATA

5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 90.7 | Rg: 101.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.9	-4.1%	1.1%
2	91.8	-2.2%	3.2%
3	89.0	0.2%	5.0%
4	92.9	-1.1%	0.8%
5	93.9	1.1%	1.7%
6	93.3	3.3%	0.0%
7	93.1	-0.5%	-1.9%
8	97.2	-0.3%	-0.9%
9	93.4	-1.0%	3.2%
10	89.9	-0.1%	5.6%
11	87.0	4.7%	7.2%
12	89.2	5.8%	-0.2%
13	89.1	3.5%	-6.7%
14	86.3	4.1%	-9.2%
15	91.4	-2.0%	-3.6%
16	84.7	-2.1%	-10.3%

3000D | Rf: 90.6 | Rg: 101.1

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.3%
2	92.2	-1.8%	3.0%
3	89.3	0.5%	4.8%
4	92.7	-1.1%	0.6%
5	93.3	0.5%	1.4%
6	93.8	2.7%	-0.8%
7	91.2	-2.1%	-0.2%
8	97.0	-0.5%	-0.7%
9	92.5	-0.7%	3.8%
10	88.3	0.9%	7.1%
11	87.5	3.9%	7.6%
12	88.2	6.2%	-0.2%
13	89.9	3.4%	-6.0%
14	86.9	4.4%	-8.5%
15	91.9	-1.9%	-2.9%
16	84.7	-1.3%	-10.6%


LED STRIP TM30 DATA

5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for LS5 bare Lazer Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%

3000K (2K4K) | Rf: 90.2 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%


LED STRIP TM30 DATA

5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for Tunable White bare LED Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K6K/27K6) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.5%	1.2%
2	88.7	-3.9%	4.2%
3	90.5	-1.5%	4.3%
4	95.0	-1.7%	0.8%
5	95.2	-0.2%	2.1%
6	94.2	1.6%	1.9%
7	95.9	-0.8%	-2.2%
8	95.5	-1.7%	1.3%
9	93.8	-1.4	2.6%
10	91.9	-0.7%	4.2%
11	91.3	3.6%	3.7%
12	91.2	4.2%	-1.0%
13	86.6	3.8%	-12.7%
14	67.2	-3.0%	-16.3%
15	84.9	-3.3%	-9.4%
16	84.2	-5.7%	-7.5%

3000K (2K6K/27K6) | Rf: 90.5 | Rg: 100.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.2%
2	92.4	-1.8%	2.7%
3	89.8	0.3%	4.5%
4	92.4	-1.7%	0.4%
5	93.3	-0.1%	1.4%
6	94.5	2.1%	-0.6%
7	91.0	-2.5%	0.3%
8	96.9	-0.8%	-0.2%
9	91.6	-0.9%	4.6%
10	86.7	0.7%	7.8%
11	86.3	3.8%	8.5%
12	88.3	6.1%	0.6%
13	90.9	3.1%	-5.2%
14	87.3	4.7%	-7.9%
15	92.1	-1.9%	-2.5%
16	84.5	-0.9%	-10.9%

4000K ONLY (2K6K/27K6) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic



■ Test ■ Reference


		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.5	-5.5%	1.3%
2	90.4	-3.0%	2.3%
3	89.8	-2.1%	3.6%
4	89.1	-3.4%	0.4%
5	88.5	-5.9%	0.1%
6	93.6	-3.0%	-0.4%
7	88.9	-6.2%	1.7%
8	87.3	-5.0%	4.9%
9	82.4	-3.6%	11.3%
10	77.4	-1.8%	12.7%
11	79.8	4.9%	11.4%
12	88.7	4.4%	2.7%
13	88.7	4.0%	-5.1%
14	91.2	2.2%	-3.8%
15	82.7	-0.1%	-9.2%
16	82.8	-2.2%	-7.6%

LED STRIP TM30 DATA


5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

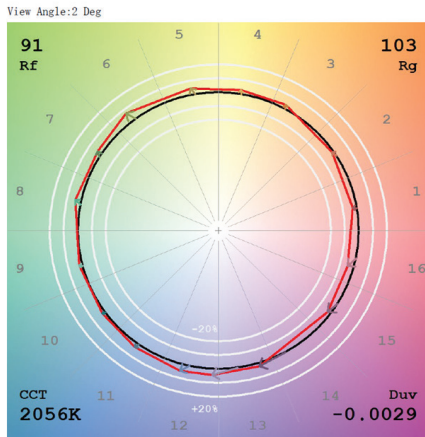


2200K (TruColor™ RGBTW)

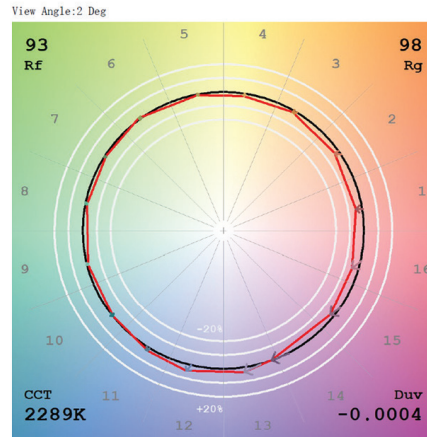


2400K (TruColor™ RGBTW)

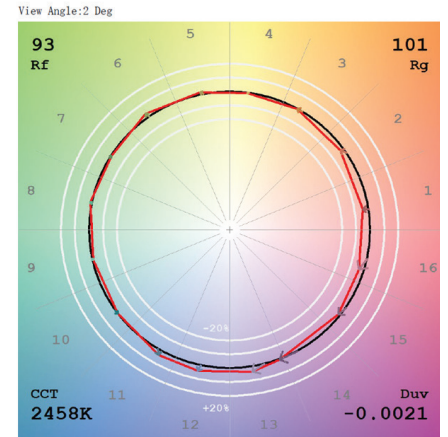


2700K (TruColor™ RGBTW)

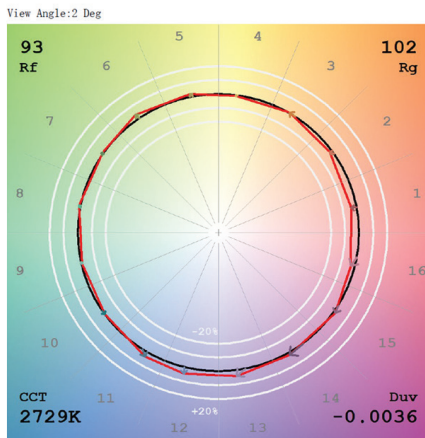


3000K (TruColor™ RGBTW)

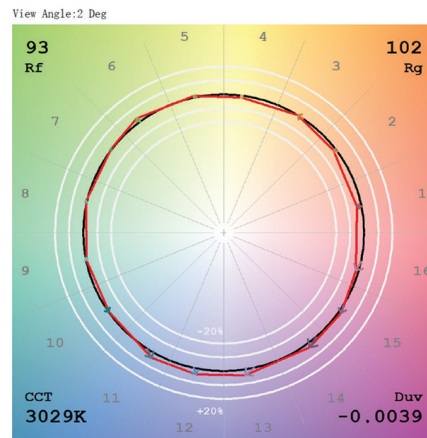


3500K (TruColor™ RGBTW)

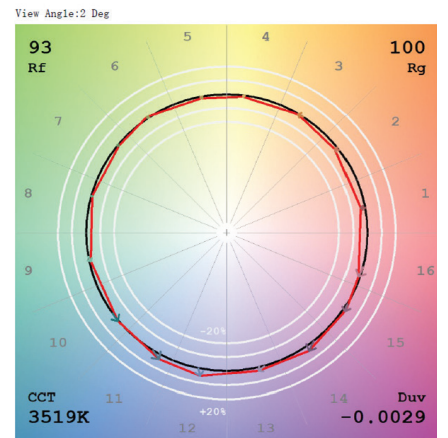

4000K (TruColor™ RGBTW)

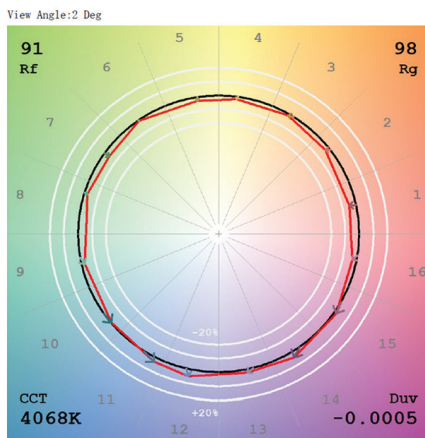

5700K (TruColor™ RGBTW)

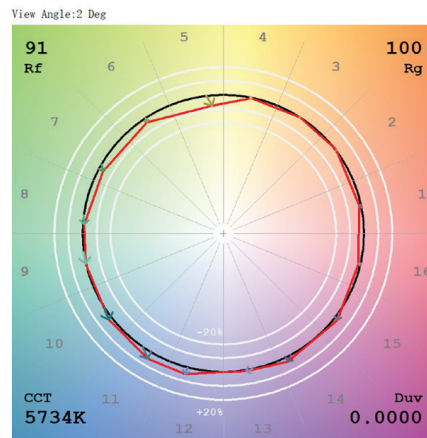

6500K (TruColor™ RGBTW)

