

SOLINA 360 WALL/VANITY

24VDC, TRUCOLOR™ PREMIUM TUNABLE WHITE

DESIGNED BY GREGORY KAY | MADE IN AMERICA

REV 07.21.26



DESCRIPTION

Slender yet powerful, the Solina 360 Wall Vanity delivers uninterrupted illumination in a refined, linear form. Designed for flexibility across minimal, transitional, and contemporary environments, Solina offers a broad range of finish and mounting options to complement any aesthetic. Our signature 360° degree lens delivers achieve a smooth, modern glow that feels continuous and clean. TruColor™ RGBTW Red, Green, Blue mixing with Tunable White 1500K-6500K to archive 94 CRI, .004 DUV at color temperature 2200K-5000K . Powered by a 24VDC remote power supply (ordered separately) that can be located up to 40' away. Solina 360 brings warmth and nuance to every environment. Fixture includes a 5-year pro-rated warranty. For custom designs and quotes, email our design team: design@PureEdgeLighting.com.

SPECIFICATIONS


- **Power Consumed** - 5 watts per foot
- **Performance** - Up to 239 Lumens per foot
- Standard Length Options from 12"-96", order in 3" increments. See length chart on page 3
- Custom Finishes Available

MOUNTING OPTIONS

Fixture mounts horizontally or vertically.

- E4R** - 4" Round End Feed Canopy
- E1R** - 1" Rectangular End Feed Canopy
- C4R** - 4" Round Center Canopy
- C1R** - 1" Rectangular Center Canopy

FINISHES

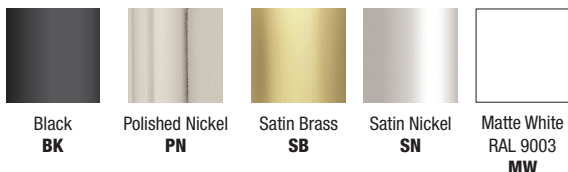

LENS

- 1.2" Diameter Diffused 360° Lens

LAMPING

- TruColor™ RGBTW Red, Green, and Blue with Tunable White (1500K-6500K)
- Designer-grade Color Rendering 96+ CRI
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

- [Home Integration Solutions](#)
- Pure Smart™ WIZ Pro [Power Supplies](#) & [Smart Controls](#)
- [DMX to WiZ Interface](#), [Power Supply](#) & [Controls](#)

*In-Wall Mounting Kits available for select power supplies

APPLICATIONS

Designed for indoor and damp locations - Ideal applications in residential, commercial, and hospitality environments, including bathroom vanities, resort spas, hotels, health, and wellness clubs.

COMPLIANCE

5-year pro-rated warranty. Damp Location, ETL listed, ADA. Title 24 compliant with Universal remote power supplies, Class 2 wiring, Assembled in America.


System	Type	Wattage	Canopy Type	Lens Length (Inches)	Color Temperature	Finish
SWR	D	5W	C4R	12	TC	SN
SWR Solina 360 Wall Vanity Straight Tube, Remote Power (order separately)	D Diffused Rigid Tube	5W 5 Watts per ft	E4R End Power Feed 4" Round Canopy E1R End Power Feed 1" Rectangular Canopy C4R Center Power Feed 4" Round Canopy C1R Center Power Feed 1" Rectangular Canopy	12-96 Order in 3" increments from 12" - 96" with order code SWP 50 watt ELV power supply in canopy	TC TruColor™ RGBTW Red, Green, Blue, & Tunable White 1500K-6500K	BK Black PN Polished Nickel SB Satin Brass SN Satin Nickel MW Matte White RAL 9003

SOLINA 360 WALL/VANITY

24VDC, TRUCOLOR™ PREMIUM TUNABLE WHITE



SOLINA 360 WITH DIFFUSED LENS & POLISHED NICKEL CENTER FEED END CAPS




FINISHES End power feed end caps shown



BK Black



SB Satin Brass



SN Satin Nickel



PN Polished Nickel



MW Matte White RAL 9003

CANOPY EXAMPLES Fixtures may be mounted vertically



C4R



C1R



SWP-D-7W-C4R-30-24K-BK




SWP-D-5W-C1R-36-30D-SN



E4R



E1R



SWP-D-7W-E4R-26-24K-SB



SWP-D-7W-E1R-26-24K-PN

NOMINAL DELIVERED LUMENS

DESCRIPTION	CORA WEAVE RIGID TUBE										DIFFUSED RIGID TUBE									
	5W										5W									
	20K	22K	24K	27K	30K	35K	40K	57K	65K		20K	22K	24K	27K	30K	35K	40K	57K	65K	
WATTS PER FOOT																				
COLOR TEMPERATURE																				
LUMENS PER FOOT (lm/ft)	98	111	115	122	127	136	139	111	104		101	114	118	125	239	140	143	114	107	
LUMENS PER WATT (lm/w)	19	22	24	28	30	30	29	28	35		48	54	56	30	58	34	68	54	51	
CRI	92	94	95	95	96	97	97	92	90		93.1	93.1	93.1	96.1	96.1	96.1	93.7	93.7	93.7	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063		-0.0032	-0.0032	-0.0032	-0.0054	-0.0054	-0.0054	0.0017	0.0017	0.0017	
Rf	91	93	94	94	95	94	94	92	90		88	88	88	93	93	93	92	92	92	
Rg	105	101	103	105	104	102	100	102	103		104	104	104	104	104	104	98	98	98	
R9	90	90	90	94	97	97	91	81	70		61	61	61	79	79	79	66	66	66	
R13	92	94	95	95	94	96	99	90	87		97	97	97	99	99	99	95	95	95	
R15	99	99	99	98	97	97	97	89	85		90	90	90	97	97	97	91	91	91	
WATTS/FOOT	5.3	5	4.8	4.4	4.3	4.5	4.8	4	3		2.1	2.1	2.1	4.1	4.1	4.1	2.1	2.1	2.1	

SOLINA 360 WALL/VANITY

24VDC, TRUCOLOR™ PREMIUM TUNABLE WHITE

LENGTH CHART Actual Lengths for the Solina Wall/Vanity


TRUCOLOR RGBTW	
ORDERING CODE (Nominal Size)	ACTUAL LENGTH (Inches)
12	12
15	15
18	18
21	21
24	24
27	27
30	30
33	33
36	36
39	39
42	42
45	45
48	48
51	51
54	54
57	57
60	60
63	63
66	66
69	69
72	72
75	75
78	78
81	81
84	84
87	87
90	90
93	93
96	96

SOLINA 360 WALL/VANITY


24VDC, TRUCOLOR™ PREMIUM TUNABLE WHITE

DRAWINGS

C4R - Center Power Feed 4" Round Canopy

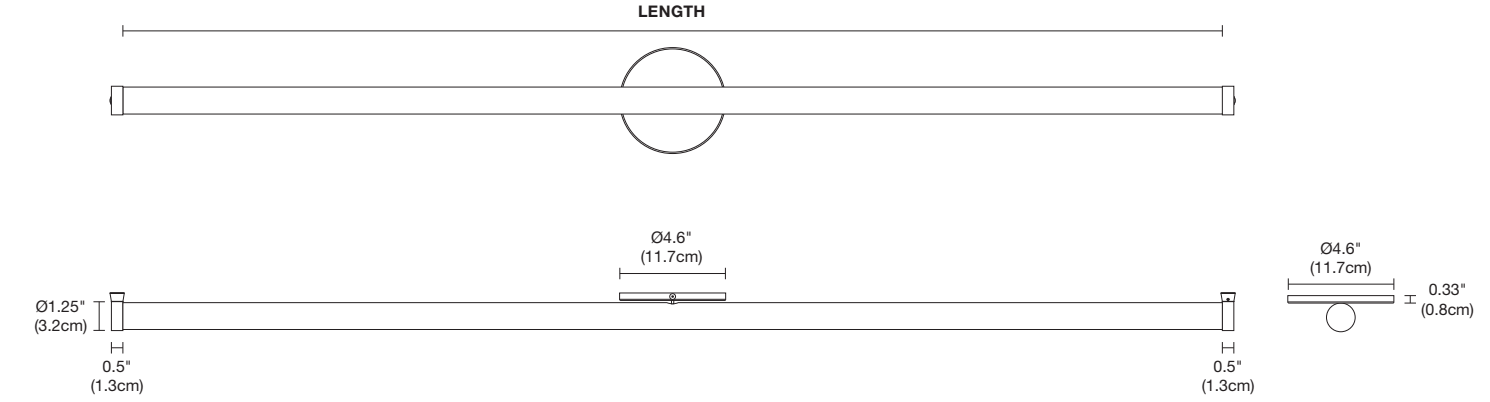

C1R - Center Power Feed 1" Rectangle Canopy

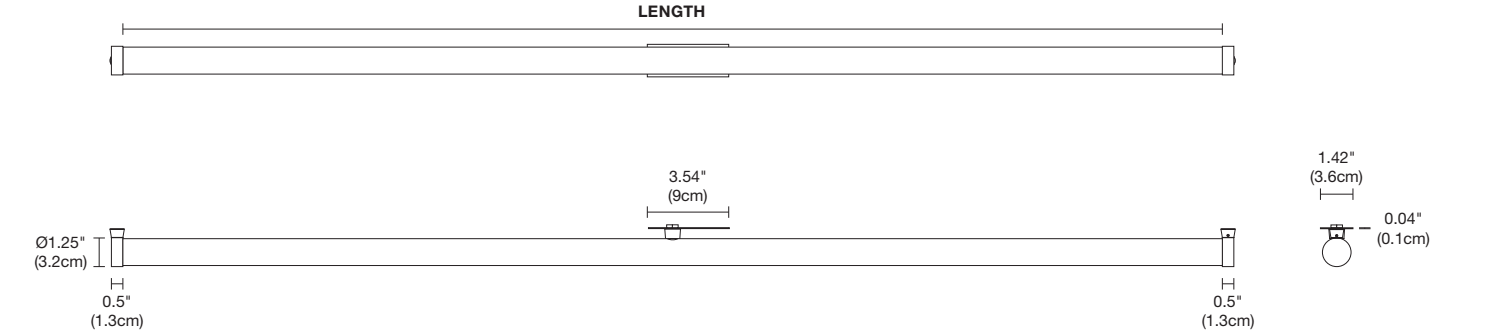


SOLINA 360 WALL/VANITY


24VDC, TRUCOLOR™ PREMIUM TUNABLE WHITE

DRAWINGS

E4R - End Power Feed 4" Round Canopy

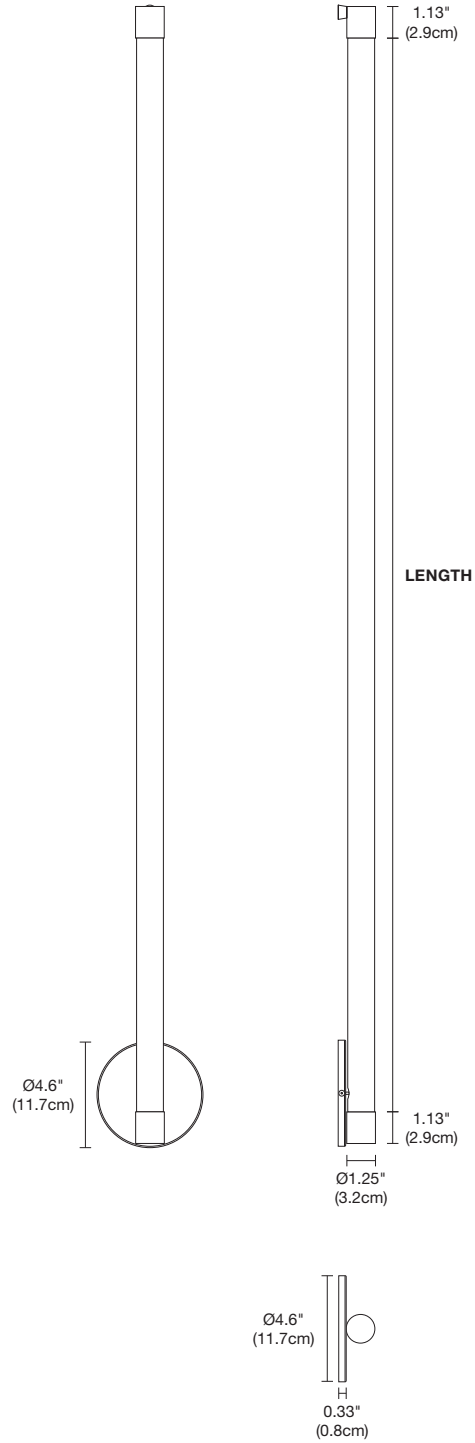

E1R - End Power Feed 1" Rectangle Canopy

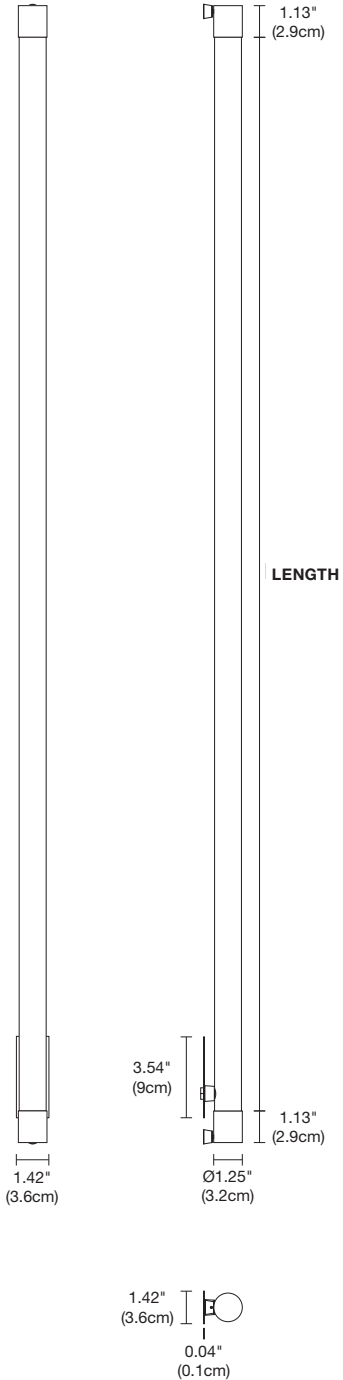

TM30 DATA

24VDC, TRUCOLOR™ RGBTW


DESIGNED BY GREGORY KAY | MADE IN AMERICA

REV 07.21.26

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

View Angle:2 Deg

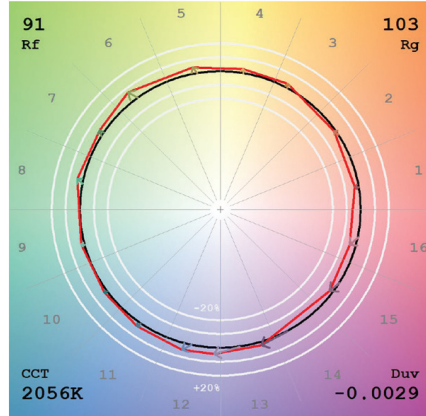


2200K (TruColor™ RGBTW)

View Angle:2 Deg

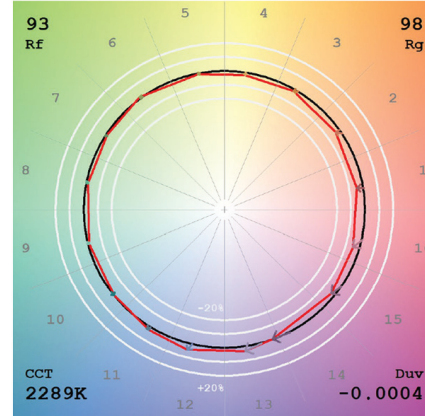


2400K (TruColor™ RGBTW)

View Angle:2 Deg

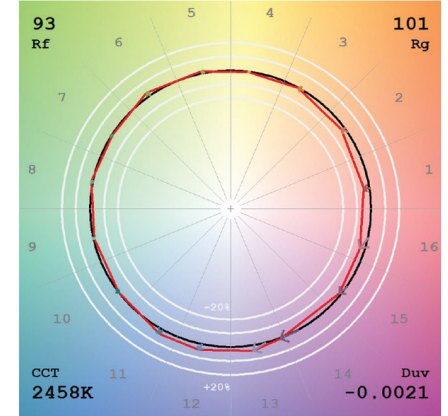


2700K (TruColor™ RGBTW)

View Angle:2 Deg

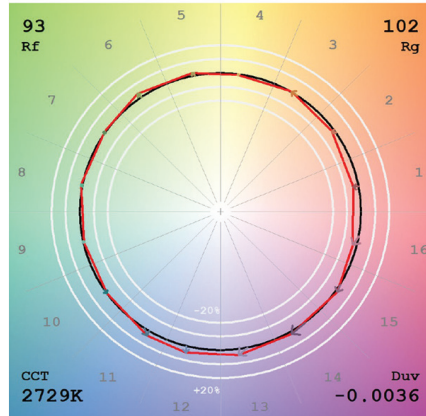


3000K (TruColor™ RGBTW)

View Angle:2 Deg

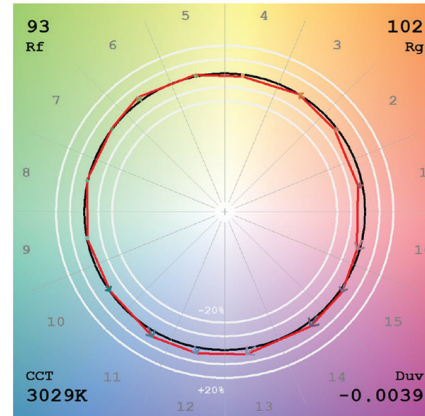


3500K (TruColor™ RGBTW)

View Angle:2 Deg

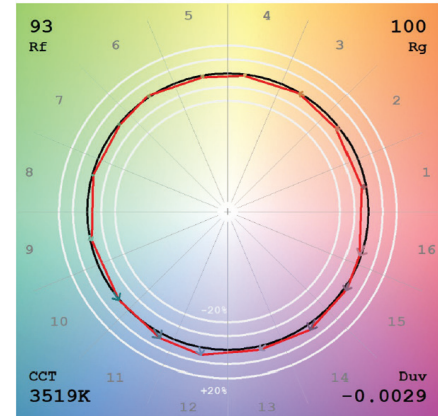


4000K (TruColor™ RGBTW)

View Angle:2 Deg

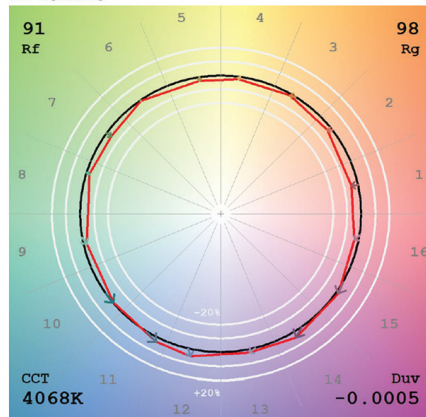

5700K (TruColor™ RGBTW)

View Angle:2 Deg

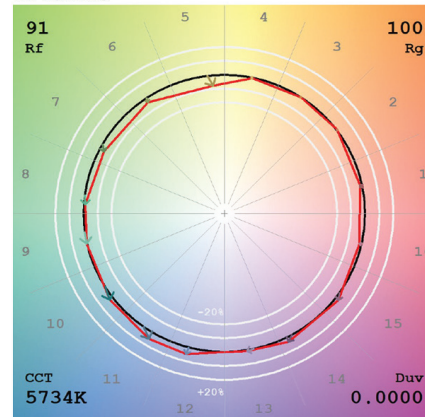

6500K (TruColor™ RGBTW)

View Angle:2 Deg

