

TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

ASSEMBLED IN AMERICA

REV 09.02.25



2C Cora

DESCRIPTION

Trapeze 360 MIYO (Make-It-Your-Own) Suspension is a flexible, architectural lighting system that blends form and function to create continuous, 360-degree illumination without pixelation. Its sculptural, minimal design provides a striking visual element while delivering exceptional color rendering for a clean, uninterrupted glow.

Designed to offer both a sophisticated aesthetic and an inviting ambiance, Trapeze 360 enhances interiors with its fluid, seamless flow. Choose from Static White, Warm Dim (30D), Tunable White (2K6K & 27K6), or TruColor RGBTW which is our premier light engine with a wide spectrum from 1500K-6500K and exceptional color rendering (94+ CRI). TruColor RGBTW takes Tunable White to the next level. With the addition of the red, green, and blue channels to the tunable white, we're able to achieve a level of quality, performance, and accuracy that was previously unattainable. TruColor RGBTW can be controlled with either DMX or WiZ Pro wireless controls. With flexible configuration options and precision engineering, Trapeze 360 serves as both a functional lighting solution and a design statement, making it the perfect solution for a wide range of applications. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

LUMEN PERFORMANCE AT 3000K (2D) (1D, 1C -10%)

| | | | |
|-----------------|------------|----------------|-------------|
| 5W LUMEN OUTPUT | 755 lm/ft | EFFICIENCY | 151 lm/watt |
| 7W LUMEN OUTPUT | 1064 lm/ft | EFFICIENCY | 152 lm/watt |
| CRI | 92 | Rg | 98 |
| BEAM ANGLE | 360° | BEAM TOLERANCE | +/- 30CCT |

SPECIFICATIONS

| | |
|-----------------------|------------------------------------|
| DIMENSIONS | DIA: 1C = 0.9" and 2C = 1.2" |
| INPUT | 24VDC with 5" leads |
| POWER SUPPLIES | Remote 24VDC power supply required |
| POWER CONSUMPTION | 3, 5 or 7 watts per foot |
| INCREMENTS | 2.4" or 3" |
| MAX LENGTH | 40' at 5 watts, 30' at 7 watts |
| BENDING | 4" minimum radius |
| MATERIAL | UV Resistant Silicon |
| OPERATING TEMPERATURE | -4° F (-20° C) to 122° F (+50° C) |
| AVERAGE LED LIFE | 50,000 hrs |
| WARRANTY | 5 Year pro-rated |

LAMP

- Static White Color Temperatures ranging from **2400K** through **4000K**
- Warm Dim: **30D** dim down to 1800K, resembling halogen light sources
- Tunable White: **2K6K** and **27K6** grants independent control for adjusting color temperature and intensity
- Dynamic **RGB & RGB+White** in 2000K (RGB, RGB20K) (special order in 27K, 30K and 40K)
- **TruColor™ RGBTW** Dynamic RGB with Tunable White 1500K-6500K
- Average life: 50,000 hours

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

Static White

- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#)
ELV & TRIAC [Smart Dimmer & Switch](#)

Warm Dim

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- **Make It Smart:** [Pure Smart™ Wi-Fi Dimmer](#)

Tunable White

- [0-10V](#): Requires two dimmers, one for intensity and one for color temperature
- [DMX Dynamic Color Changing](#): Must be used with PureEdge [Controllers](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

RGBTW

- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

*In-wall mounting and drop ceiling kits available for select power supplies

COMPLIANCE

*Title 24 JA8 compliant for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Assembled in USA.

APPLICATIONS

Designed for indoor use only. Ideal applications include general lighting, residential, commercial, retail, and hospitality environments.

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|


TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

ASSEMBLED IN AMERICA

REV 09.02.25

TRAPEZE 360 OPTION EXAMPLES



1D & 2D Diffused Flex



1DT Diffused Rigid Tube



1C & 2C Cora Weave Flex



1CT Cora Weave Rigid Tube

COVER FINISHES



Black



Matte White
RAL 9003



Polished Nickel



Satin Nickel



Satin Brass




1C Cora Wave Cascade




1C Cora Wave Cascade

360 ILLUMINATION



Ø0.90" (2.3cm)
 Residential Size
 1D & 1C



Ø1.15" (3cm)
 1CT & 1DT


| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE




REV 09.02.25

Two recessed Port connections in the ceiling with Remote 24V Power Supply

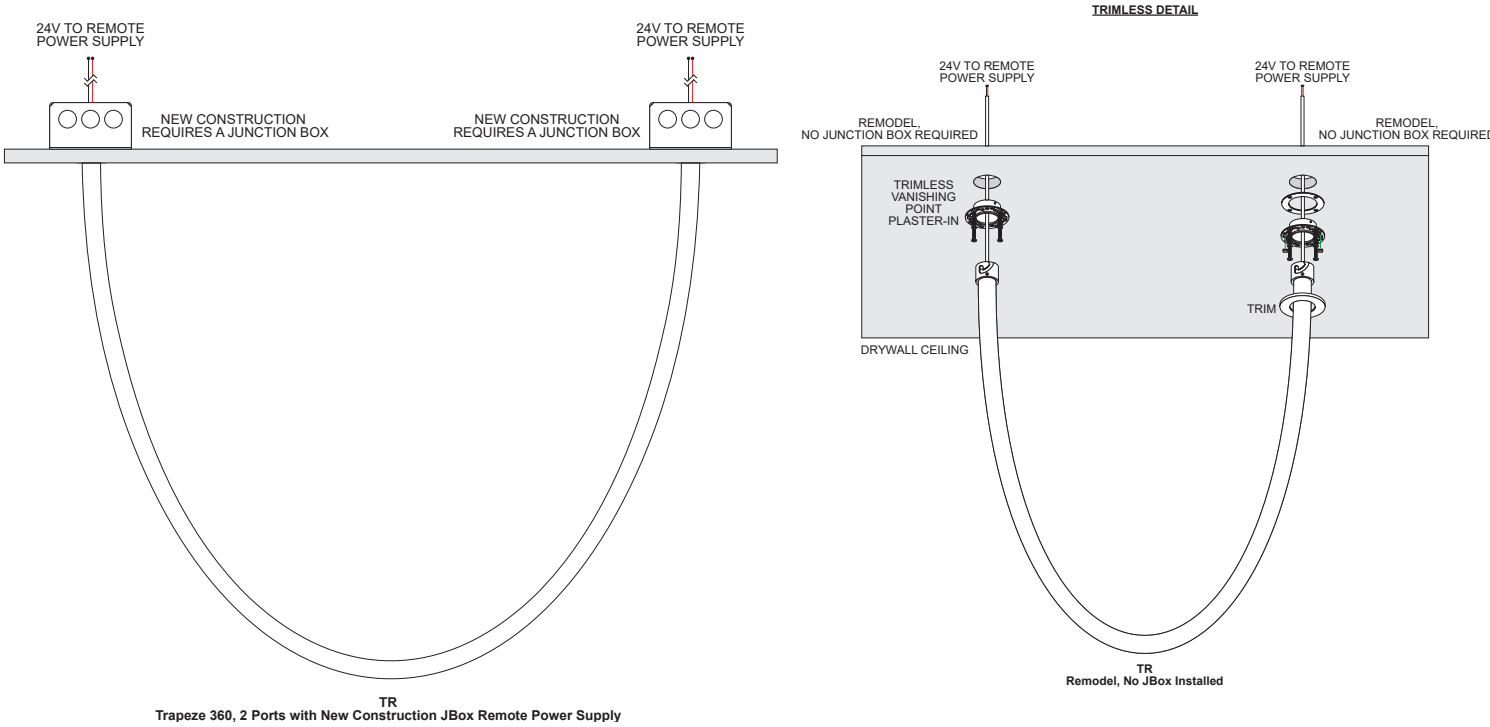

| System | Type | Wattage | Trapeze Loop Length in Inches | Color Temperature | Finish |
|--|--|--|---|---|---|
| TR | 1C | 7W | 86 | 24K | MW |
| TR Trapeze Suspension 360, two recessed ports connection points in the ceiling. New Construction or Remodel . 24V Remote Power supply required. | 1C Cora Weave Flex, 0.9" Diameter 1D Diffused Flex, 0.9" Diameter 2C* Cora Weave Flex, 1.2" Diameter 2D* Diffused Flex, 1.2" Diameter | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 6-480" (5W, Max 40") – Over 240" (20ft) requires two power supplies 6-312" (7W, Max 26") – Over 120" (10ft) requires two power supplies, 240" (20ft) to 480" (40ft) requires four 96W power supplies | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 300* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *7W ONLY | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy XX Custom* *RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING. |

[Circumference Calculator](#)

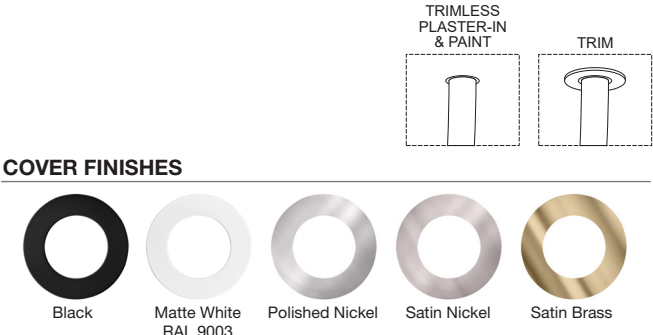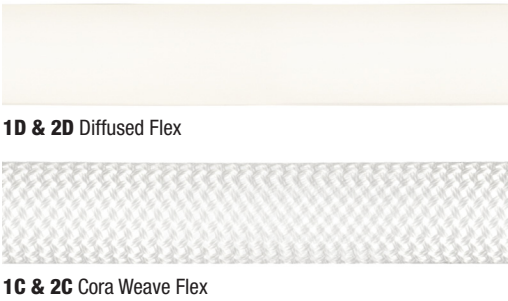


| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

TRAPEZE WITH CABLE AND CEILING PORT 24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

One trapeze recessed Port connections in the ceiling and one aircraft cable. Remote 24V Power supply

TRAPEZE FLEX 360
 CONFIGURATIONS
 UPDATED 04/15/25

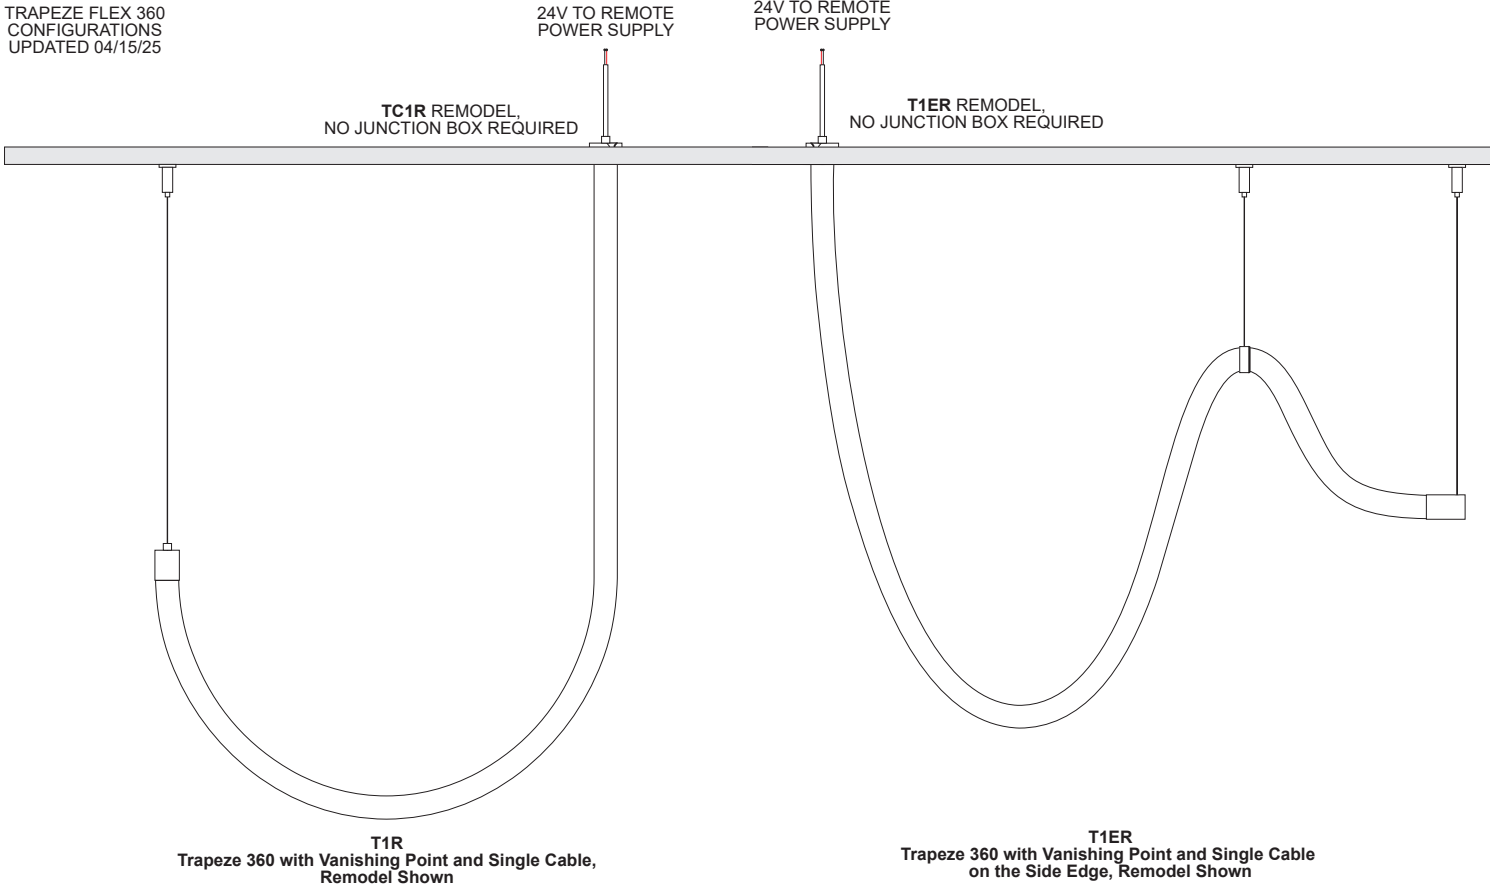


| System | Type | Wattage | Length in Inches | Color Temperature | Cap and Trim Finish* |
|---|--|--|--|---|---|
| T1R | 1C | 7W | 86 | 24K | SBL |
| T1R Trapeze Suspension 360 with 1 Adjustable Cable, one recessed connection points in the ceiling and suspension cable, New Construction or Remodel, 24V Remote Power supply required T1ER Trapeze/Cable with one adjustable cable on the Edge side, feed, 360 in port ceiling canopy, Connector Remodel, Remote Power | 1C Cora Weave Flex, 0.9" Diameter 1D Diffused Flex, 0.9" Diameter | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 6-240" (5W, Max 20') 6-156" (7W, Max 13') Over 240" (20ft) requires two 96W power supplies | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** * L add L after End Cap finish for Trimless Plaster-in Canopy |

[Circumference Calculator](#)

*7W ONLY & CORA ONLY


**RAL/___ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.





1D Diffused Flex



1C Cora Weave Flex



COVER FINISHES

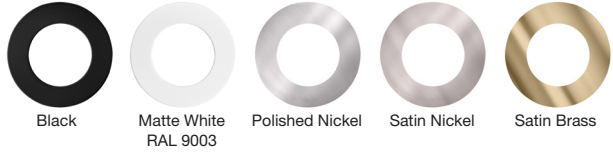


| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|


TRAPEZE WITH CABLES

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

2 Cable, 1 aircraft cable to ceiling and 1 Power Cord to VP canopy or 2 Power feeds Cords with VP Cables

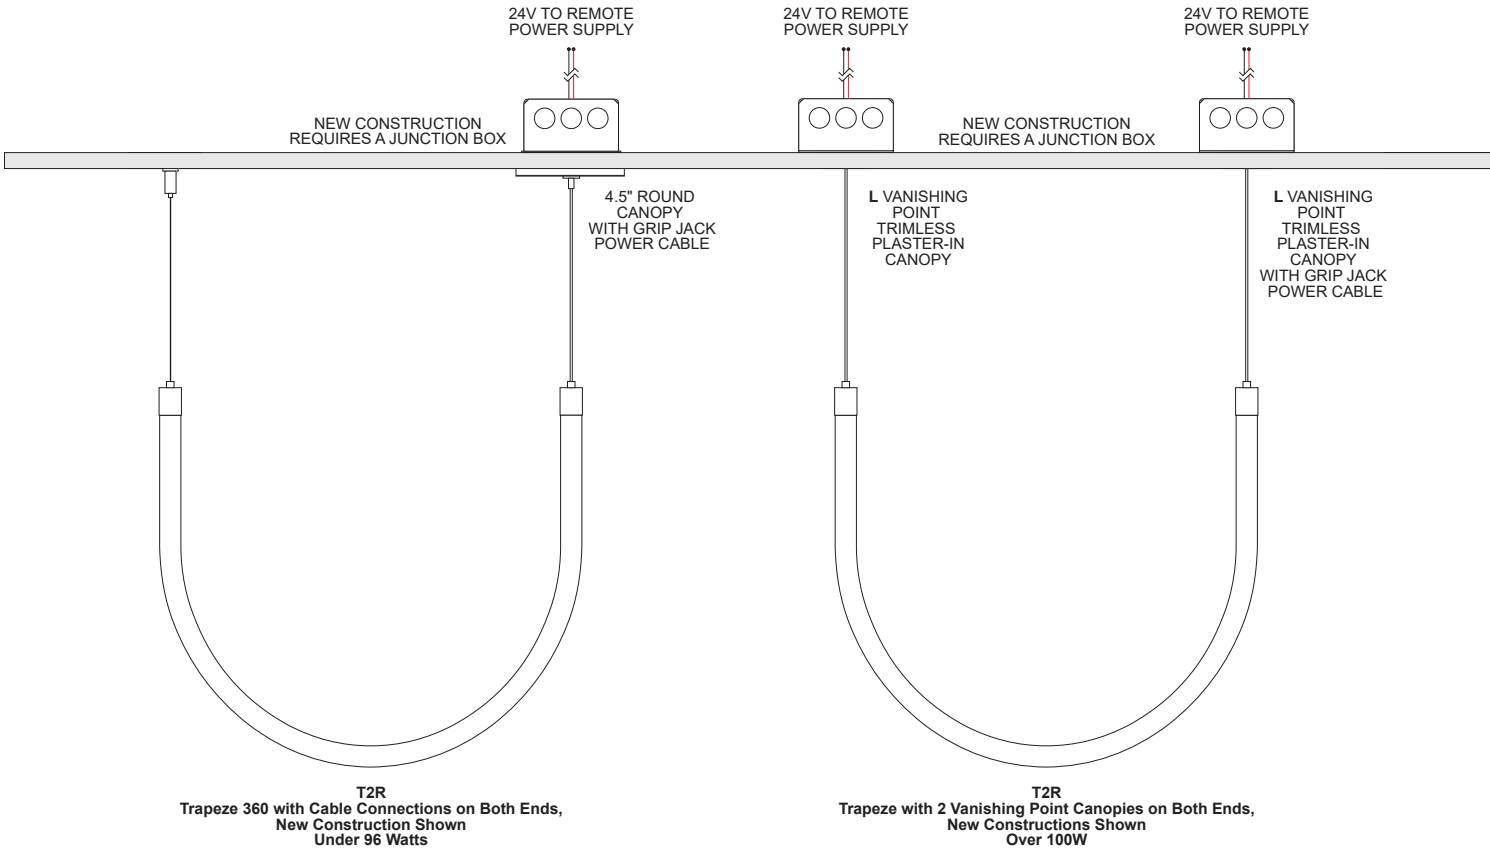

| System | Type | Wattage | Canopy | Length in Inches | Color Temperature | Cap and Trim Finish* |
|--|--|--|--|---|---|---|
| T2R | 1C | 7W | 4R | 86 | 24K | SNL |
| T2R Trapeze Suspension 360 with Adjustable Cable, two recessed connection points in the ceiling, New Construction or Remodel , 24V Remote Power supply required | 1C Cora Weave Flex, 0.9" Diameter 1D Diffused Flex, 0.9" Diameter | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 4R 4.5" Round Canopy V Vanishing Point Canopy VM Trimless Plaster-in Vanishing Point 2.0" Millwork Flush-Mount Canopy | 6-480" (5W, Max 40") – Over 240" (20ft) requires two remote power supplies and canopies 6-312" (7W, Max 26") – Over 120" (10ft) requires two remote power supplies and canopies, 240" (20ft) to 480" (40ft) requires four 96W power supplies | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** *_L add L after End Cap finish for Trimless Plaster-in Canopy |




1D Diffused Flex



1C Cora Weave Flex

COVER FINISHES

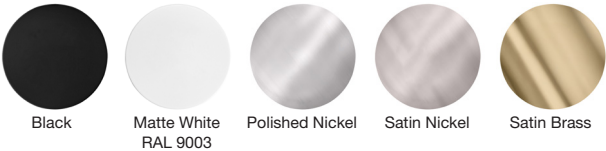


| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

SWING CEILING

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

Swing 360 Ceiling Mount: New Construction and Remodel

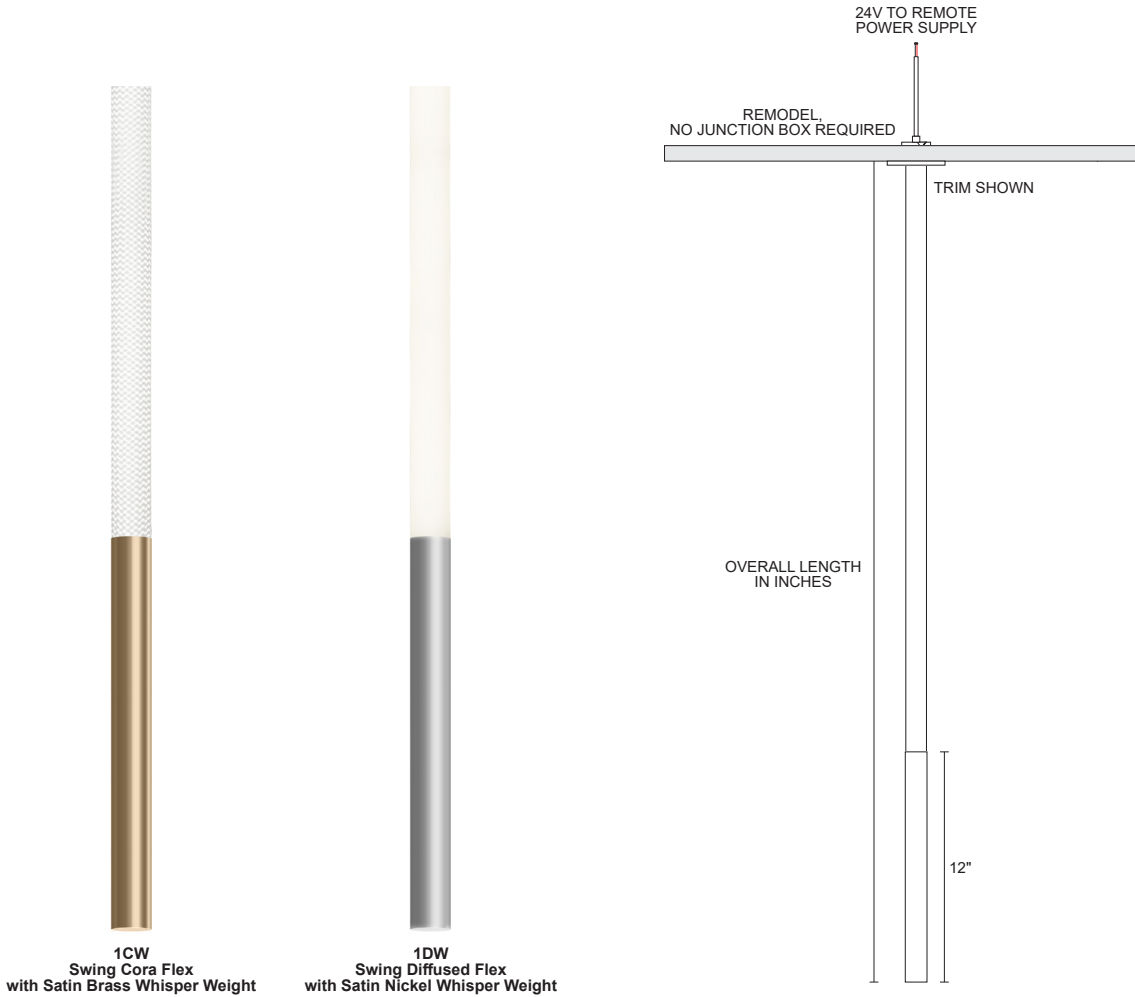



SGCR-1CW

| System | Type | Wattage | Overall Length in Inches | Color Temperature | Weight and Trim Finish* |
|--|--|--|--|---|---|
| SGCR | 1CW | 7W | 86 | 24K | SBL |
| SGCR Swing Suspension with Recessed Port in the ceiling. New Construction or Remodel , 24V Remote Power supply required | 1CW 0.9" Cora Flex with 12" Whisper Weight 1DW 0.9" Diffused Flex with 12" Whisper Weight | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 24-240" (5W) 24-156" (7W) | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** * L add L after End Cap finish for Trimless Plaster-in Canopy |

*7W ONLY

**RAL/... SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.

COVER FINISHES


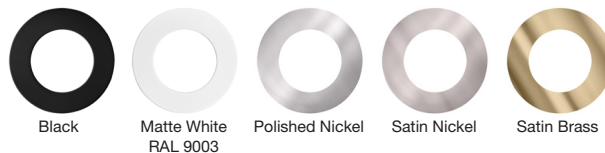


| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

SWING SUSPENSION WITH WHISPER WEIGHT

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

Swing 360 Suspension Ceiling: New Construction and Remodel

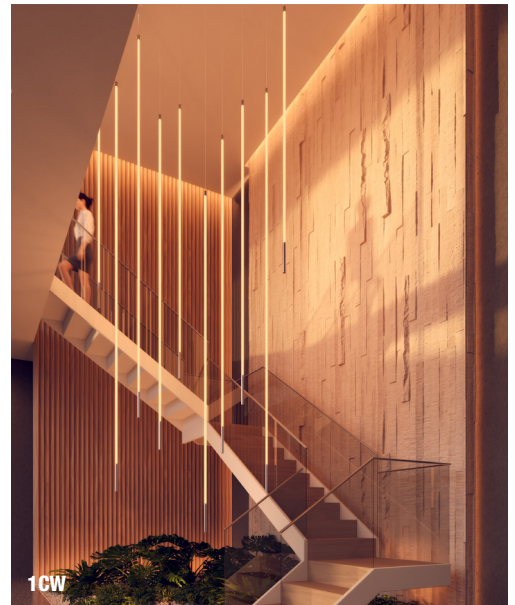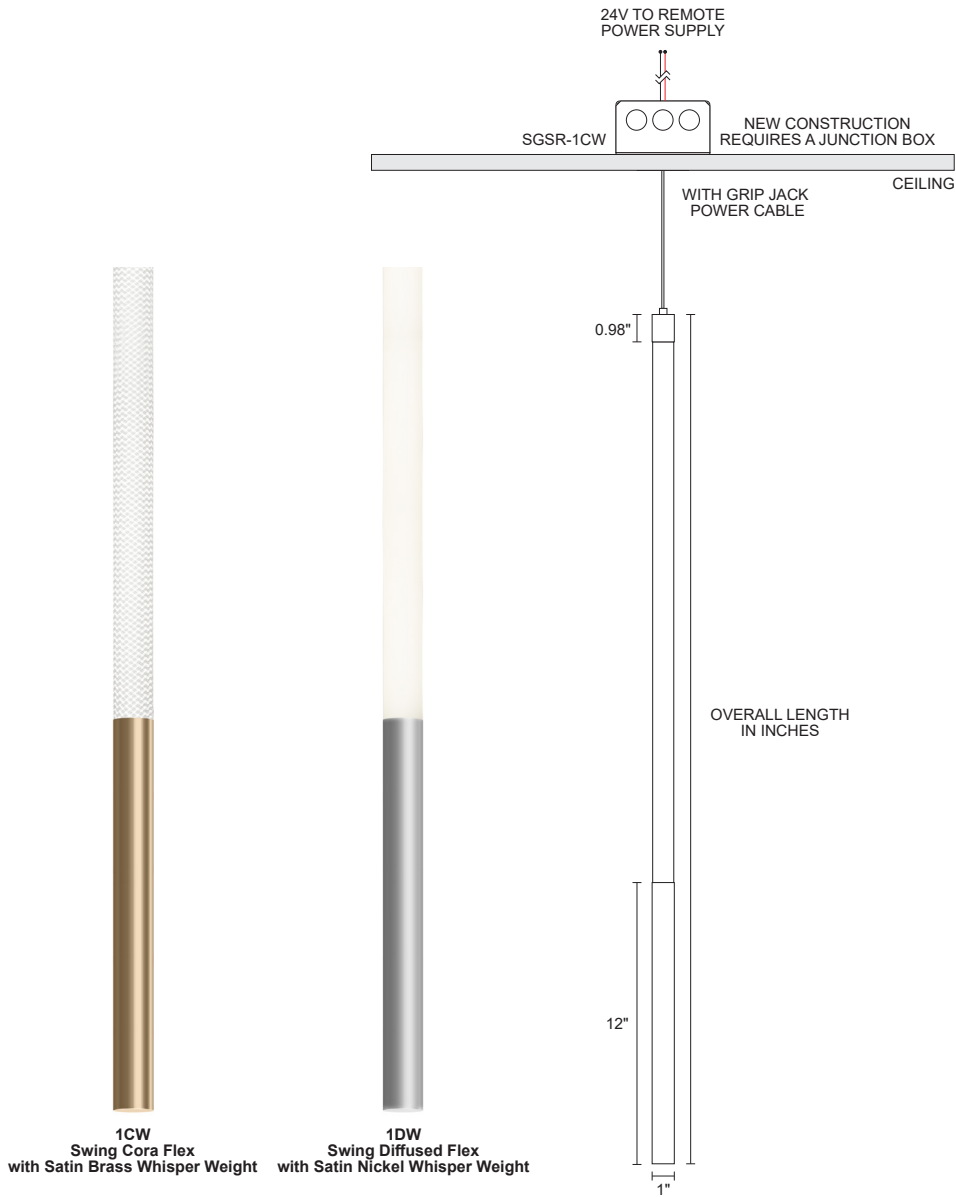

| System | Type | Wattage | Canopy | Overall Length in Inches | Color Temperature | Finish |
|---|--|--|--|--|---|---|
| SGSR | 1CW | 7W | 4R | 86 | 24K | MW |
| SGSR Swing Suspension ceiling Mount 360 Flex with one End with Cable, the other end with Whisper Weight, New Construction or Remodel, 24V Remote Power supply required | 1CW 1" Cora Flex with 12" Whisper Weight 1DW 1" Diffused Flex with 12" Whisper Weight | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 4R 4.5" Round Canopy V Vanishing Point Canopy VM Trimless Plaster-in Vanishing Point 2.0" Millwork Flush-Mount Canopy | 12-240" (5W, Max 20') 12-156" (7W, Max 13') | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel CH Chrome XX Custom* |


*7W ONLY

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

SOLINA 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

Solina 360 Ceiling Vertical: New Construction and Remodel

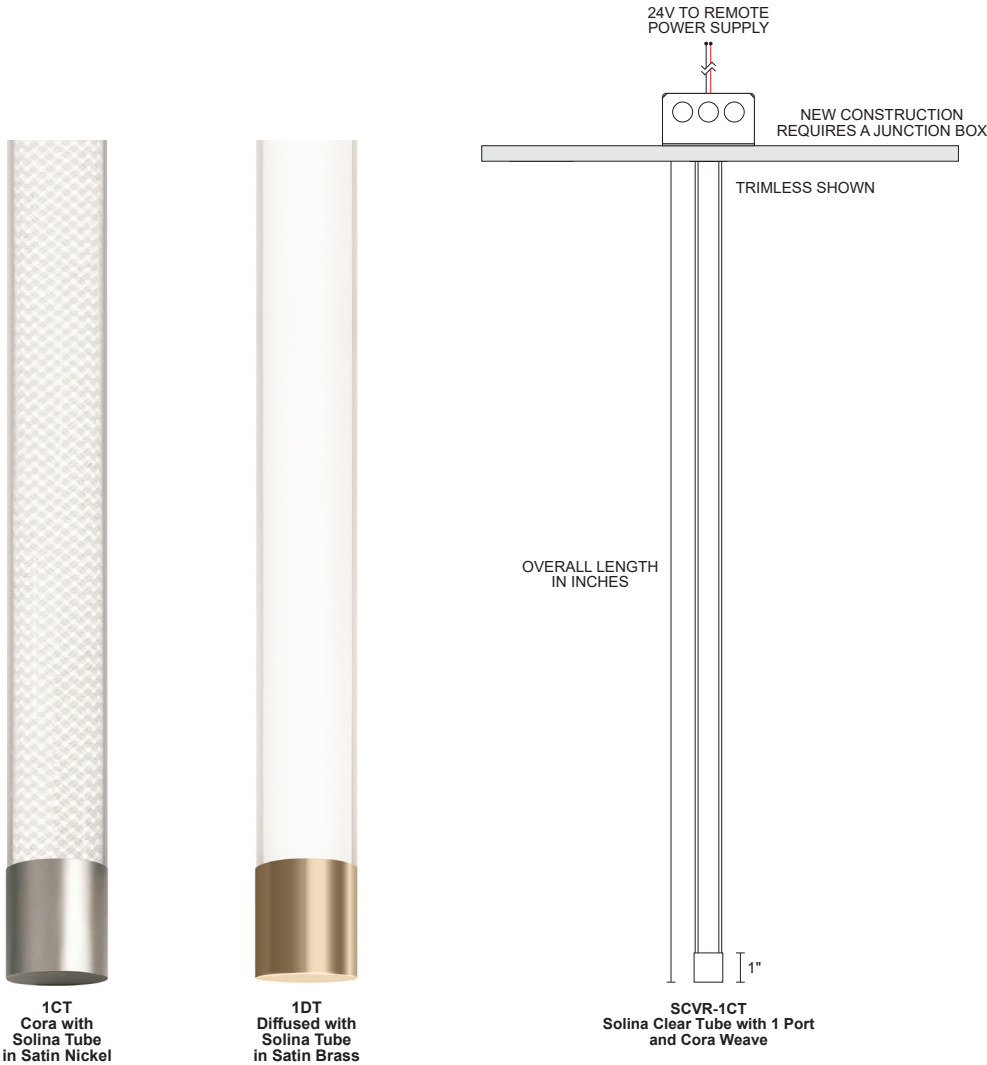

| System | Type | Wattage | Overall Length in Inches | Color Temperature | Finish* |
|--|---|--|---|---|---|
| SCVR | 1CT | 7W | 96 | 24K | SBL |
| SCVR Solina Ceiling Vertical, New Construction or Remodel, 24V Remote Power supply required | 1CT 1" Cora 360 inside Solina 1.2" Clear Straight Tube 1DT 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 12-96" Order in various increments from 12 - 96 inches | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** *_L add L after End Cap finish for Trimless Plaster-in Canopy |
| <small>*RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.</small> | | | | | |


*7W ONLY

SOLINA 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

Solina 360 Suspension Vertical: New Construction and Remodel

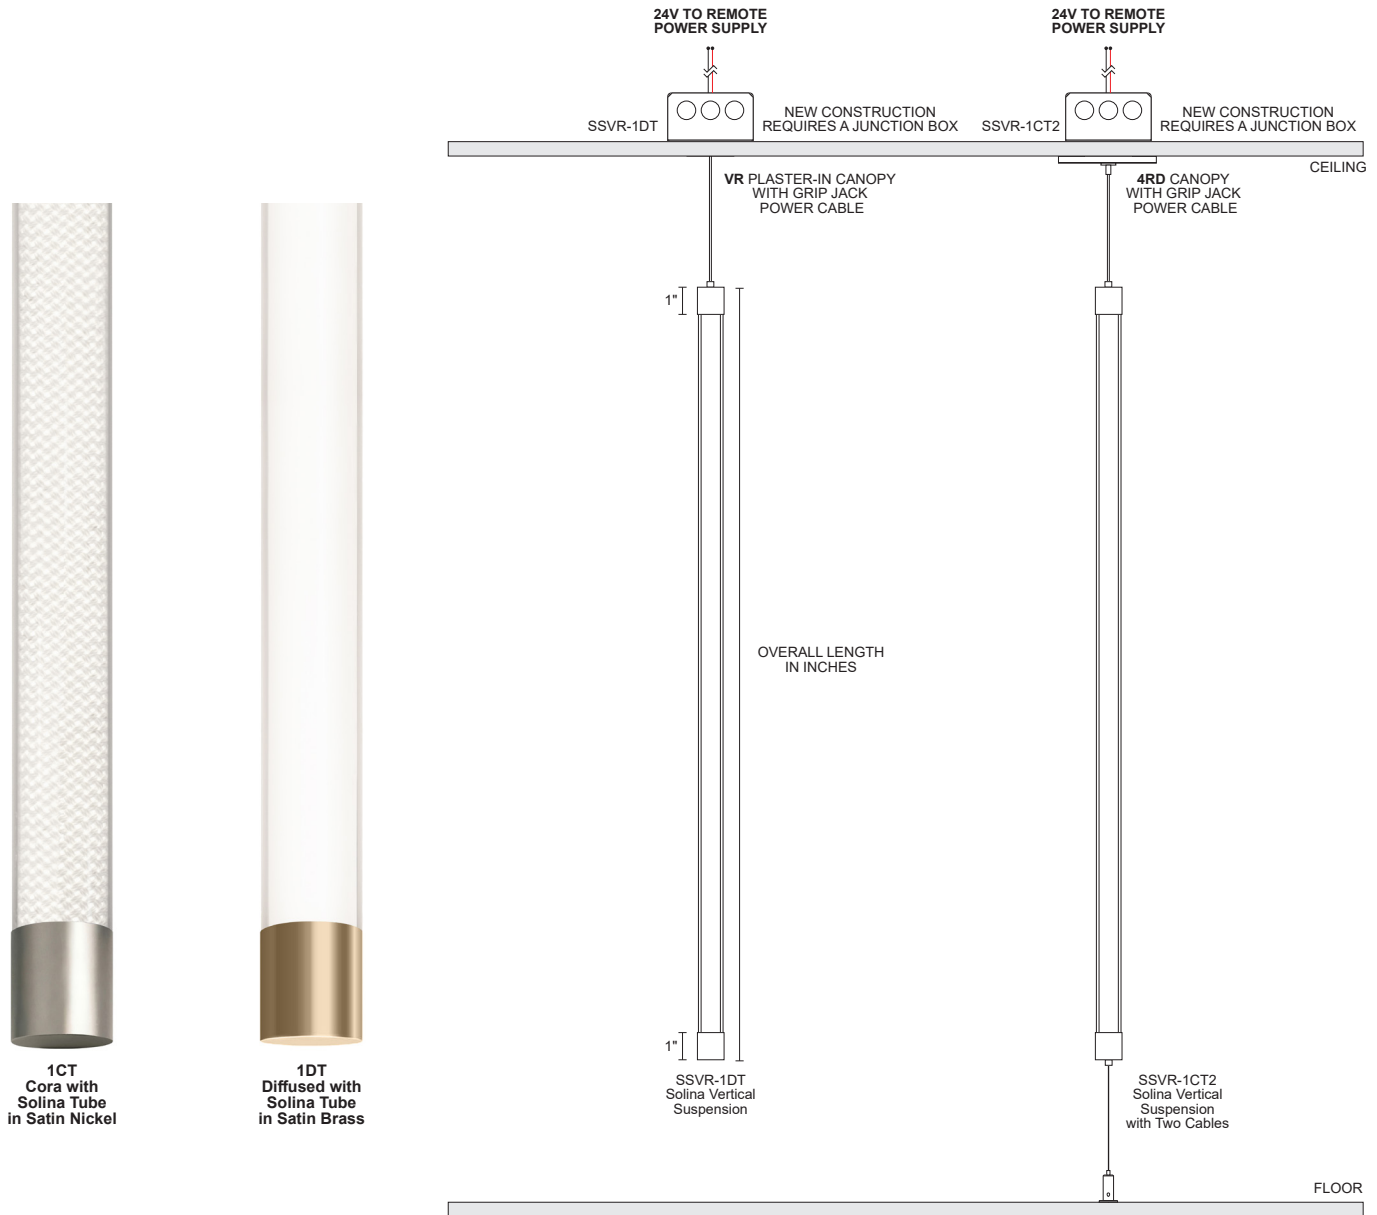

| System | Type | Wattage | Canopy | Overall Length in Inches | Color Temperature | Finish |
|---|--|--|---|---|---|--|
| SSVR | 1CT | 7W | 4R | 96 | 24K | MW |
| SSVR Solina Suspension Vertical, New Construction or Remodel, 24V Remote Power supply required | 1CT 1" Cora 360 inside 1.2" Clear Straight Tube 1CT2 1" Cora 360 inside 1.2" Clear Straight Tube, 2 Cables 1DT 1" Diffused Flex 360 inside 1.2" Clear Straight Tube 1DT2 1" Diffused Flex 360 inside 1.2" Clear Straight Tube, 2 Cables | 3W 3 Watts per foot 5W 5 watts per foot 7W 7 watts per foot | 4R 4.5" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point 2.0" Millwork Flush-Mount Canopy | 12-96" Order in various increments from 12 - 96 inches | 24K 2400K Very Warm White 27K 2700K Incandescent White 30K 3000K Warm White 30D* 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K6K* Tunable White 2000K-6500K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy XX Custom* |

*7W ONLY

*RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|


SOLINA 360

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

Solina 360 Suspension Horizontal: New Construction and Remodel



* Support cable included with lengths over 5'

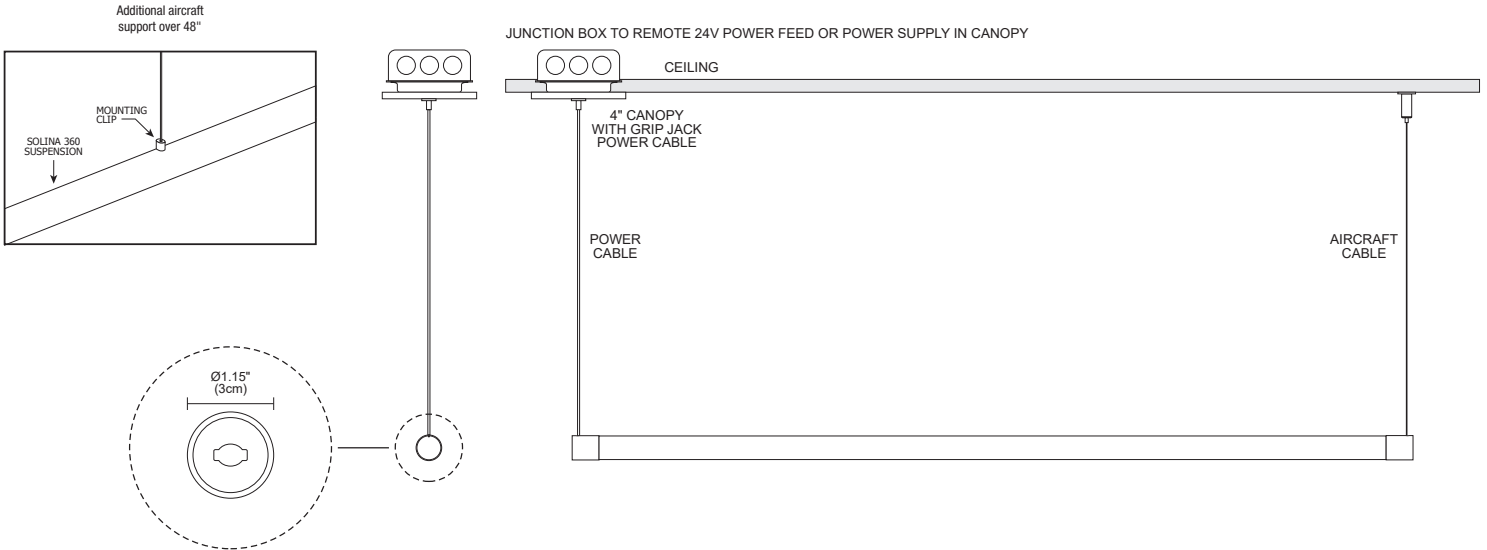

| System | Type | Wattage Per Foot | Canopy | Nominal Lengths In Feet | Color Temperature | Finish |
|--|--|--|--|--|---|--|
| SSHR | 1CT | 5W | 4R | 8 | 30K | SN |
| SSHR Solina 360 Horizontal Suspension, 24V Remote Power supply required | 1CT Cora Weave Tube 1.2" 1DT Diffused Rigid Tube 1.2" | 3W 3 Watt 5W 5 Watt 7W 7 Watt | 4R 4.6" Round Canopy VR Vanishing Point Plaster-in System (no visible canopy) VM Vanishing Point with Millwork Canopy | 3-26 Order in 1' increments 5W max length - 20' 7W max length - 13' with one 96W power supply at one end up to 26ft with two power supplies at each end | 24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim (7W only) 30K 3000K Warm White 30D 3000K Warm Dim (7W only) 35K 3500K Neutral White 40K 4000K Cool White | BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel TL Trimless Plaster-in Canopy XX Custom* |
| | | | *With EC power supply in canopy, only VM,2R,4R canopies can be used | EC Includes adjustable 12' coaxial cables (additional aircraft cables included for center support when fixture exceeds 9') | *Warm Dim 7W only | *RAL/_ Specify RAL powder coat code (EX: #RAL/9007) Additional finishes are available with an extended lead time. Custom quote is required prior to ordering. |

TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

ACCESSORIES



CEILING SUPPORT RING

| System | Diameter | Type | Finish |
|---------------------|-----------------|-----------------|-----------|
| FN360 | 1F | CR | CL |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | CR Ceiling Ring | CL Clear |



SUSPENSION SUPPORT RING

| System | Diameter | Type | Finish |
|---------------------|-----------------|--------------------|-----------|
| FN360 | 1F | SR | CL |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | SR Suspension Ring | CL Clear |



WRAP AROUND CLIP

| System | Diameter | Product |
|---------------------|-----------------|-----------------------|
| FN360 | 1F | WRCL |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | WRCL Wrap Around Clip |



INVISIBLE CLIP

| System | Diameter | Product |
|---------------------|-----------------|----------------------|
| FN360 | 1F | INVCL |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | INVCL Invisible Clip |



PUSH IN CLIP

| System | Diameter | Product |
|---------------------|-----------------|------------------|
| FN360 | 1F | PCL |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | PCL Push in Clip |



PUSH IN 3FT CHANNEL

| System | Diameter | Length | Product |
|---------------------|-----------------|---------------------|---------------------|
| FN360 | 1F | 3FT | PCC |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | 3FT 3' Long Channel | PCL Push In Channel |

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

TRAPEZE 360 MIYO


24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

FREE FORM JOINER



| System | Diameter | Product |
|---------------------|-----------------|----------------|
| FN360 | 1F | JC |
| FN360 Flex Neon 360 | 1F 1" Dia. Flex | JC Joiner Clip |

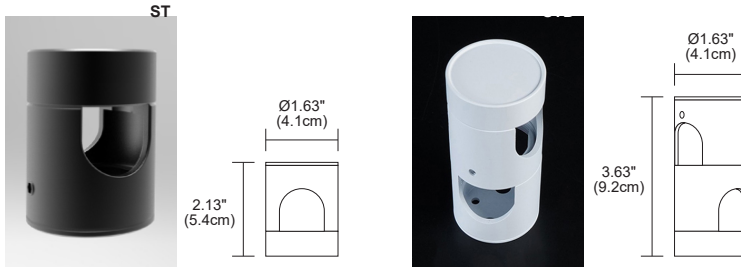


STANDOFF FOR 1" FLEX 360

Create your own freeform design.



| System | Diameter | Product | Finish |
|----------------|------------|--|--|
| FN360 | 1F | ST | BK |
| FN360 Flex 360 | 1F 1" Flex | ST 1" Dia. Standoff STD 1" Dia. Dual Standoff | BK Black MW Matte White XX Custom* |

*RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.

Wall Mounted

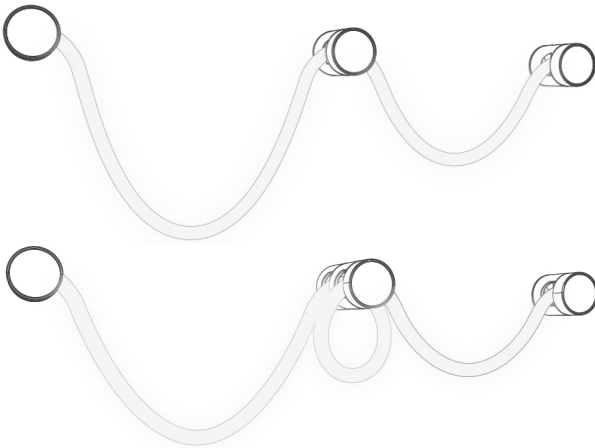

Ceiling Mounted

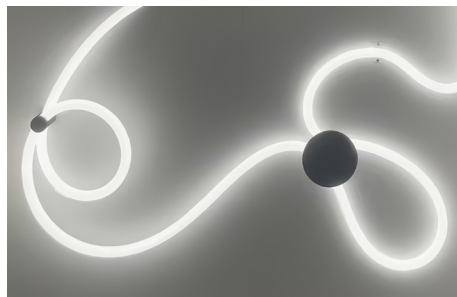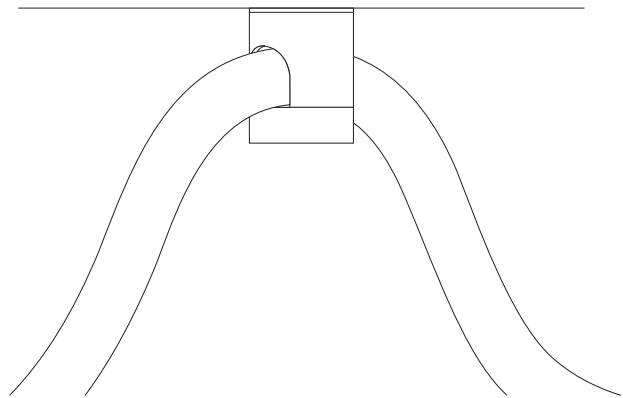


7" ROUND CEILING/WALL 24V REMOTE POWER FEED CANOPY

Can be used as a 24V end power feed from the ceiling or wall, or as a freeform anchor point for wrapping the 360 Flex. Fits over standard 4" square electrical box with round plaster ring.

| System | Diameter | Product | Finish |
|----------------|------------|-----------------------------------|--|
| FN360 | 1F | 7RDC | BK |
| FN360 Flex 360 | 1F 1" Flex | 7RDC 7" Round Ceiling/Wall Canopy | BK Black MW Matte White SB Satin Brass XX Custom* |


*RAL/_ SPECIFY RAL POWDER COAT CODE (EX: #RAL/9007) ADDITIONAL FINISHES ARE AVAILABLE WITH AN EXTENDED LEAD TIME. CUSTOM QUOTATION IS REQUIRED PRIOR TO ORDERING.

WIRING DIAGRAM: Single Junction Box for TruColor RGBTW

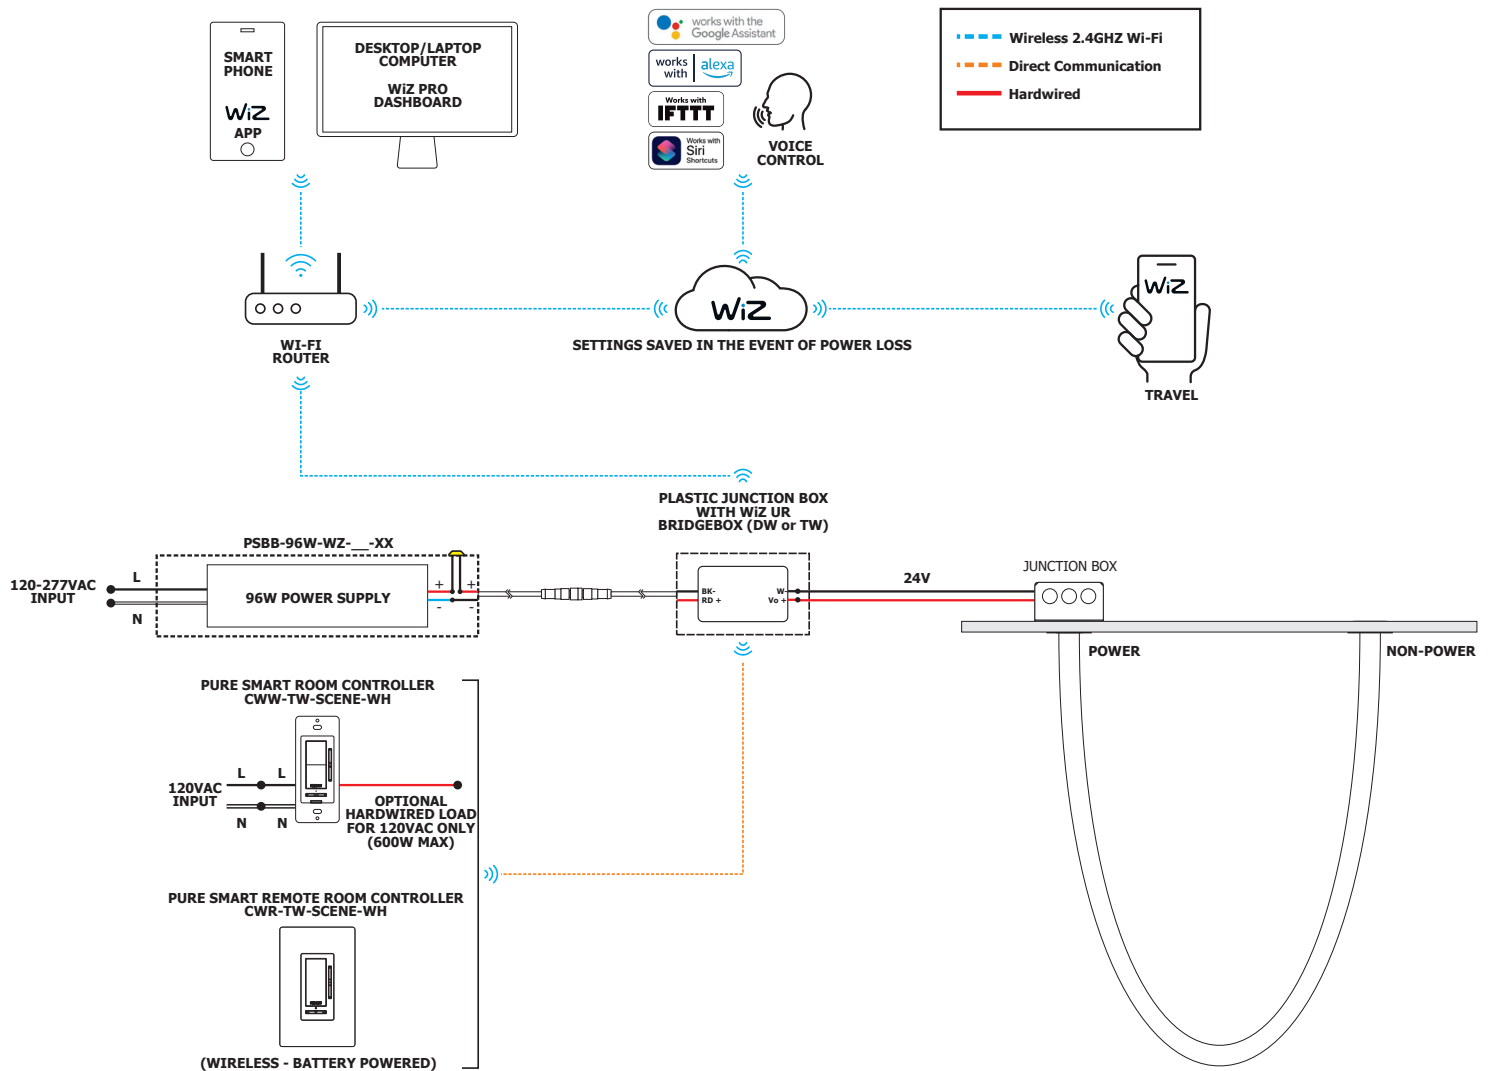

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

WIRING DIAGRAM: Multiple Junction Boxes for TruColor RGBTW

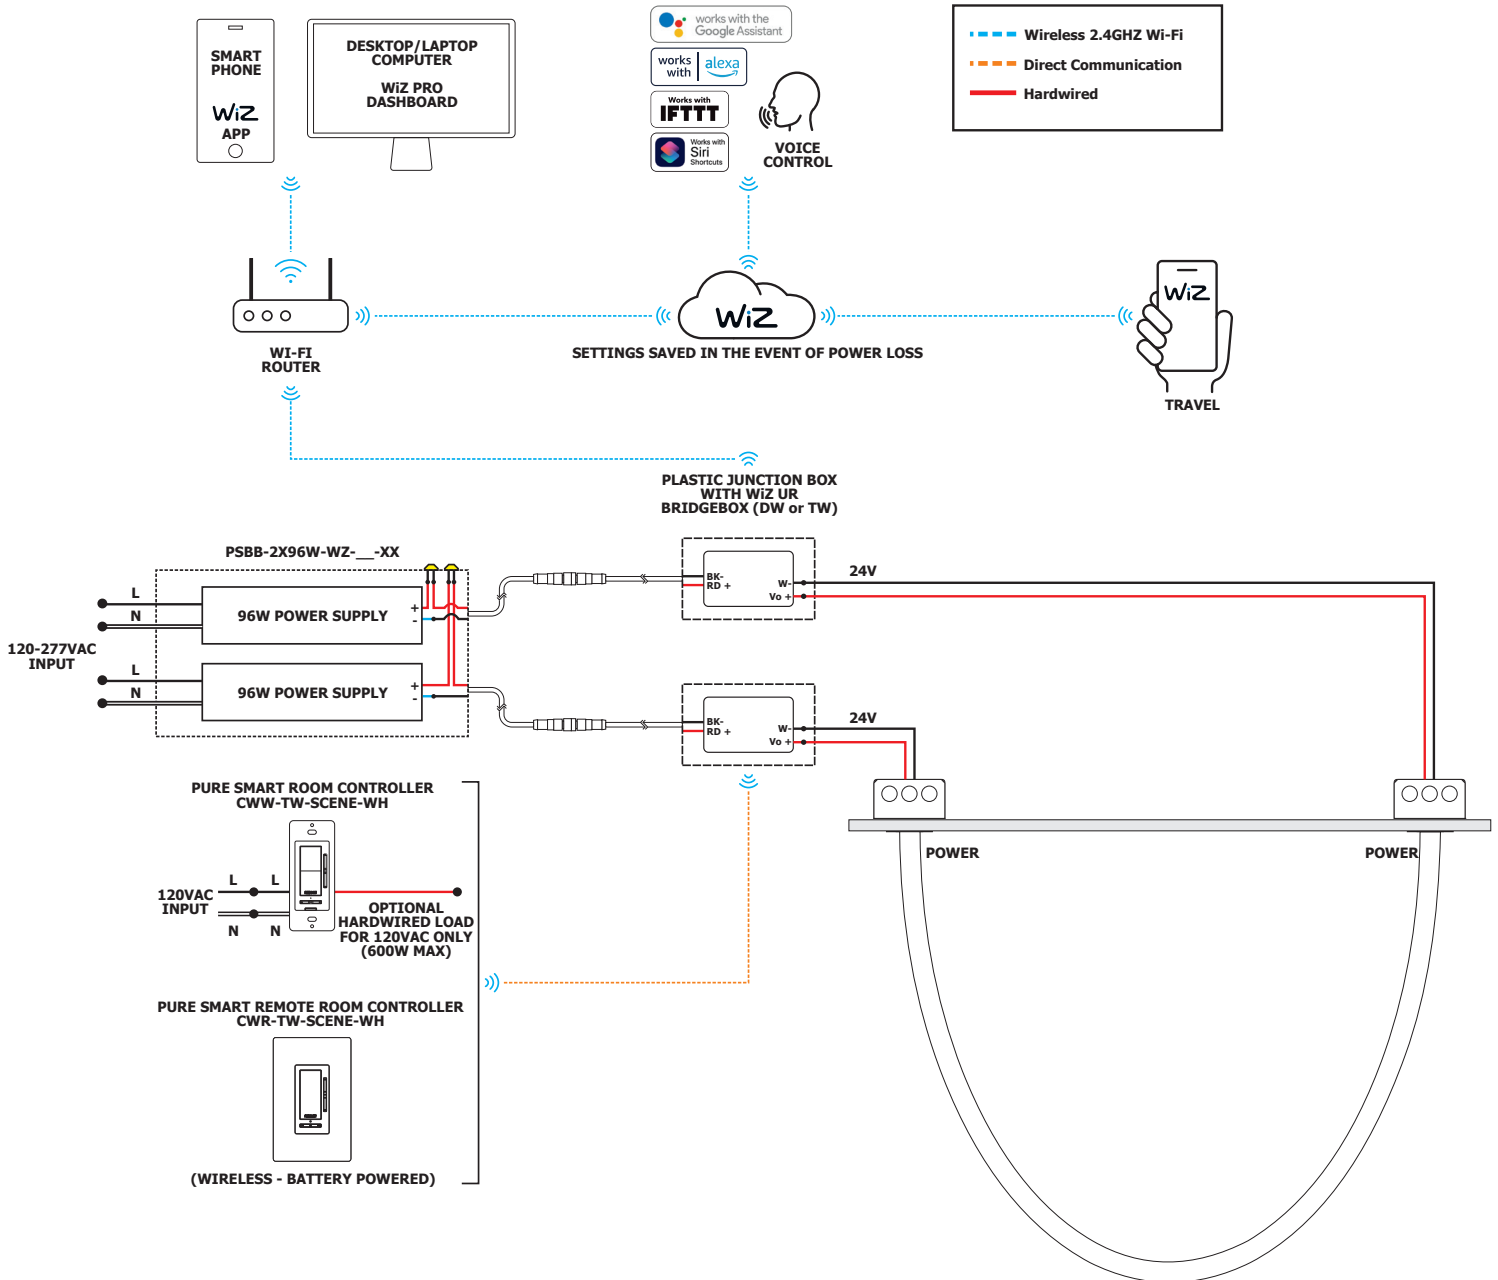

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

NOMINAL DELIVERED LUMENS

| | 1" CORA FLEX 1C STATIC WHITE AND WARM DIM | | | | | | | | | | |
|-------------------------|---|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|
| WATTS PER FOOT | 5W | | | | | 7W | | | | | |
| COLOR TEMPERATURE | 24K | 27K | 30K | 35K | 40K | 24K | 27K | 30K | 30D* | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 306 | 309 | 322 | 369 | 389 | 372 | 376 | 458 | 253 | 449 | 474 |
| LUMENS PER WATT (lm/w) | 61 | 62 | 64 | 74 | 78 | 53 | 54 | 65 | 30 | 64 | 68 |
| CRI | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 94+ | 92+ | 92+ |

*Warm Dim: 9.6 Watts

| | 1" DIFFUSED FLEX 1D STATIC WHITE AND WARM DIM | | | | | | | | | | |
|-------------------------|---|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|
| WATTS PER FOOT | 5W | | | | | 7W | | | | | |
| COLOR TEMPERATURE | 24K | 27K | 30K | 35K | 40K | 24K | 27K | 30K | 30D* | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 337 | 341 | 355 | 407 | 430 | 406 | 410 | 506 | 288 | 488 | 517 |
| LUMENS PER WATT (lm/w) | 67 | 68 | 71 | 81 | 86 | 58 | 59 | 72 | 34 | 70 | 74 |
| CRI | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 94+ | 92+ | 92+ |

*Warm Dim: 9.6 Watts

| | 1.2" CORA FLEX 2C STATIC WHITE AND WARM DIM | | | | | | | | | | |
|-------------------------|---|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|
| WATTS PER FOOT | 5W | | | | | 7W | | | | | |
| COLOR TEMPERATURE | 24K | 27K | 30K | 35K | 40K | 24K | 27K | 30K | 30D* | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 309 | 312 | 325 | 373 | 393 | 439 | 444 | 462 | 265 | 531 | 559 |
| LUMENS PER WATT (lm/w) | 62 | 62 | 65 | 75 | 79 | 63 | 63 | 66 | 32 | 76 | 80 |
| CRI | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 94+ | 92+ | 92+ |

*Warm Dim: 9.6 Watts

| | 1.2" DIFFUSED FLEX 2D STATIC WHITE AND WARM DIM | | | | | | | | | | |
|-------------------------|---|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|
| WATTS PER FOOT | 5W | | | | | 7W | | | | | |
| COLOR TEMPERATURE | 24K | 27K | 30K | 35K | 40K | 24K | 27K | 30K | 30D* | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 330 | 333 | 347 | 398 | 420 | 470 | 475 | 495 | 300 | 568 | 599 |
| LUMENS PER WATT (lm/w) | 66 | 67 | 69 | 80 | 84 | 67 | 68 | 71 | 36 | 81 | 86 |
| CRI | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 92+ | 94+ | 92+ | 92+ |

*Warm Dim: 9.6 Watts

| 1" CORA FLEX 1C 2K6K | | | | | | | | | | | | | | | | | | |
|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | | | 7W | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 162 | 165 | 167 | 169 | 171 | 176 | 192 | 207 | 222 | 278 | 287 | 296 | 305 | 314 | 332 | 358 | 368 | 378 |
| LUMENS PER WATT (lm/w) | 44 | 41 | 42 | 42 | 43 | 44 | 90 | 52 | 62 | 40 | 41 | 42 | 44 | 45 | 47 | 51 | 53 | 54 |
| CRI | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ |

| 1" DIFFUSED FLEX 1D 2K6K | | | | | | | | | | | | | | | | | | |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | | | 7W | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 180 | 183 | 185 | 188 | 191 | 196 | 214 | 230 | 246 | 309 | 319 | 329 | 339 | 349 | 370 | 398 | 409 | 420 |
| LUMENS PER WATT (lm/w) | 49 | 46 | 46 | 47 | 48 | 49 | 90 | 58 | 68 | 44 | 46 | 47 | 48 | 50 | 53 | 57 | 58 | 60 |
| CRI | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ |

| 1.2" CORA FLEX 2C 2K6K | | | | | | | | | | | | | | | | | | |
|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | | | 7W | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 164 | 166 | 169 | 171 | 173 | 178 | 194 | 209 | 224 | 281 | 290 | 299 | 308 | 318 | 336 | 362 | 372 | 382 |
| LUMENS PER WATT (lm/w) | 44 | 42 | 42 | 43 | 43 | 44 | 90 | 52 | 62 | 40 | 41 | 43 | 44 | 45 | 48 | 52 | 53 | 55 |
| CRI | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ |

| 1.2" DIFFUSED FLEX 2D 2K6K | | | | | | | | | | | | | | | | | | |
|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | | | 7W | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 176 | 179 | 181 | 184 | 186 | 191 | 209 | 225 | 241 | 302 | 312 | 322 | 332 | 342 | 361 | 390 | 400 | 411 |
| LUMENS PER WATT (lm/w) | 48 | 45 | 45 | 46 | 47 | 48 | 90 | 56 | 67 | 43 | 45 | 46 | 47 | 49 | 52 | 56 | 57 | 59 |
| CRI | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ | 91+ | 91+ | 91+ | 94+ | 93+ | 92+ | 92+ | 91+ | 91+ |

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|

TRAPEZE 360 MIYO

24VDC, STATIC WHITE, WARM DIM & TRUCOLOR TUNABLE WHITE

REV 09.02.25

| | 1" CORA FLEX 1C 27K6 | | | | | | | | | | | | | |
|-------------------------|----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | 7W | | | | | | |
| COLOR TEMPERATURE | 27K | 30K | 35K | 40K | 45K | 57K | 65K | 27K | 30K | 35K | 40K | 45K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 177 | 210 | 216 | 222 | 242 | 261 | 248 | 309 | 331 | 342 | 354 | 361 | 369 | 361 |
| LUMENS PER WATT (lm/w) | 44 | 42 | 43 | 44 | 48 | 52 | 62 | 44 | 47 | 49 | 51 | 52 | 53 | 52 |
| CRI | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ |

| | 1" DIFFUSED FLEX 1D 27K6 | | | | | | | | | | | | | |
|-------------------------|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | 7W | | | | | | |
| COLOR TEMPERATURE | 27K | 30K | 35K | 40K | 45K | 57K | 65K | 27K | 30K | 35K | 40K | 45K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 195 | 232 | 238 | 245 | 267 | 288 | 274 | 341 | 365 | 378 | 390 | 399 | 407 | 399 |
| LUMENS PER WATT (lm/w) | 49 | 46 | 48 | 49 | 53 | 58 | 68 | 49 | 52 | 54 | 56 | 57 | 58 | 57 |
| CRI | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ |

| | 1.2" CORA FLEX 2C 27K6 | | | | | | | | | | | | | |
|-------------------------|------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | 7W | | | | | | |
| COLOR TEMPERATURE | 27K | 30K | 35K | 40K | 45K | 57K | 65K | 27K | 30K | 35K | 40K | 45K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 177 | 211 | 216 | 222 | 243 | 261 | 249 | 310 | 332 | 343 | 355 | 362 | 370 | 363 |
| LUMENS PER WATT (lm/w) | 44 | 42 | 43 | 44 | 49 | 52 | 62 | 44 | 47 | 49 | 51 | 52 | 53 | 52 |
| CRI | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ |

| | 1.2" DIFFUSED FLEX 2D 27K6 | | | | | | | | | | | | | |
|-------------------------|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WATTS PER FOOT | 5W | | | | | | | 7W | | | | | | |
| COLOR TEMPERATURE | 27K | 30K | 35K | 40K | 45K | 57K | 65K | 27K | 30K | 35K | 40K | 45K | 57K | 65K |
| LUMENS PER FOOT (lm/ft) | 191 | 227 | 233 | 239 | 261 | 281 | 268 | 334 | 357 | 369 | 382 | 390 | 398 | 390 |
| LUMENS PER WATT (lm/w) | 48 | 45 | 47 | 48 | 52 | 56 | 67 | 48 | 51 | 53 | 55 | 56 | 57 | 56 |
| CRI | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ | 94+ | 93+ | 92+ | 92+ | 92+ | 92+ | 91+ |

| | 1" CORA FLEX 1C TRUCOLOR RGBTW | | | | | | | | | | | | | |
|-------------------------|--------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|
| WATTS PER FOOT | 7W | | | | | | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | | | | | |
| LUMENS PER FOOT (lm/ft) | | | | | | | | | | | | | | |
| LUMENS PER WATT (lm/w) | | | | | | | | | | | | | | |
| CRI | | | | | | | | | | | | | | |

| | 1" DIFFUSED FLEX 1D TRUCOLOR RGBTW | | | | | | | | | | | | | |
|-------------------------|------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|
| WATTS PER FOOT | 7W | | | | | | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | | | | | |
| LUMENS PER FOOT (lm/ft) | | | | | | | | | | | | | | |
| LUMENS PER WATT (lm/w) | | | | | | | | | | | | | | |
| CRI | | | | | | | | | | | | | | |

| | 1.2" CORA FLEX 2C TRUCOLOR RGBTW | | | | | | | | | | | | | |
|-------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|
| WATTS PER FOOT | 7W | | | | | | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | | | | | |
| LUMENS PER FOOT (lm/ft) | | | | | | | | | | | | | | |
| LUMENS PER WATT (lm/w) | | | | | | | | | | | | | | |
| CRI | | | | | | | | | | | | | | |

| | 1.2" DIFFUSED FLEX 2D TRUCOLOR RGBTW | | | | | | | | | | | | | |
|-------------------------|--------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|
| WATTS PER FOOT | 7W | | | | | | | | | | | | | |
| COLOR TEMPERATURE | 20K | 22K | 24K | 27K | 30K | 35K | 40K | 57K | 65K | | | | | |
| LUMENS PER FOOT (lm/ft) | | | | | | | | | | | | | | |
| LUMENS PER WATT (lm/w) | | | | | | | | | | | | | | |
| CRI | | | | | | | | | | | | | | |

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|


LED STRIP TM30 DATA

5W | 10W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 92 | -2.4% | 1.5% |
| 2 | 94.7 | -2.1% | -0.0% |
| 3 | 95.4 | -1.9% | -0.1% |
| 4 | 88.7 | -6.7% | -3.1% |
| 5 | 92.8 | -5.6% | 1.0% |
| 6 | 92.7 | -3.4% | 3.4% |
| 7 | 89.9 | -4.3% | 4.1% |
| 8 | 92.4 | -1.4% | 4.4% |
| 9 | 89 | -0.6% | 5.8% |
| 10 | 88.9 | 0.4% | 6.2% |
| 11 | 89.7 | 4.0% | 5.4% |
| 12 | 92.6 | 3.0% | -0.7% |
| 13 | 90.9 | 1.1% | -7.0% |
| 14 | 89.9 | 0.5% | -5.8% |
| 15 | 92.1 | -3.2% | 0.1% |
| 16 | 88.9 | -1.7% | -6.3% |

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 88.0 | -4.3% | 2.6% |
| 2 | 91.6 | -2.4% | 2.0% |
| 3 | 93.7 | -1.4% | 1.9% |
| 4 | 88.9 | -5.6% | -3.1% |
| 5 | 92.3 | -5.5% | -0.5% |
| 6 | 92.9 | -3.5% | 0.1% |
| 7 | 84.5 | -7.5% | 4.6% |
| 8 | 90.8 | -3.0% | 4.4% |
| 9 | 84.5 | -1.3% | 8.3% |
| 10 | 83.9 | 2.0% | 9.8% |
| 11 | 87.2 | 5.3% | 7.1% |
| 12 | 89.2 | 5.4% | -2.6% |
| 13 | 88.7 | 0.3% | -7.8% |
| 14 | 86.8 | 1.7% | -9.3% |
| 15 | 87.6 | -5.4% | -1.3% |
| 16 | 83.6 | -3.3% | -9.5% |

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 92.5 | -3.1% | 0.3% |
| 2 | 93.3 | -2.3% | 1.9% |
| 3 | 90.9 | -0.8% | 3.9% |
| 4 | 94.3 | -1.1% | 1.4% |
| 5 | 92.5 | -2.6% | 1.5% |
| 6 | 96.4 | 1.2% | -0.3% |
| 7 | 92.6 | -2.5% | -0.0% |
| 8 | 96.9 | -1.4% | 0.2% |
| 9 | 92.3 | -1.8% | 4.3% |
| 10 | 86.6 | -0.7% | 7.0% |
| 11 | 86.5 | 2.4% | 8.2% |
| 12 | 89.8 | 5.9% | 1.7% |
| 13 | 93.9 | 2.6% | -2.7% |
| 14 | 89.4 | 5.1% | -5.8% |
| 15 | 90.1 | -0.1% | -4.7% |
| 16 | 86.5 | 0.3% | -9.7% |

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 90.8 | -3.8% | 0.3% |
| 2 | 92.3 | -2.8% | 2.1% |
| 3 | 89.7 | -1.0% | 4.3% |
| 4 | 92.6 | -1.4% | 1.7% |
| 5 | 91.8 | -3.1% | 1.3% |
| 6 | 96.2 | 0.8% | -0.4% |
| 7 | 92.9 | -3.2% | 0.2% |
| 8 | 94.3 | -2.5% | 1.5% |
| 9 | 90.4 | -2.5% | 5.2% |
| 10 | 84.3 | -1.4% | 9.5% |
| 11 | 83.1 | 3.5% | 9.8% |
| 12 | 88.2 | 4.8% | 3.4% |
| 13 | 94.0 | 2.7% | -2.0% |
| 14 | 88.7 | 5.9% | -5.8% |
| 15 | 88.7 | 0.7% | -5.9% |
| 16 | 86.8 | -0.7% | -6.7% |

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference


| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 88.9 | -2.4% | 2.5% |
| 2 | 93.3 | -0.4% | 0.8% |
| 3 | 94.8 | -1.0% | -0.6% |
| 4 | 87.9 | -4.9% | -3.6% |
| 5 | 85.3 | -9.4% | -2.6% |
| 6 | 90.2 | -6.0% | 0.2% |
| 7 | 85.3 | -7.6% | 4.6% |
| 8 | 83.7 | -4.1% | 8.2% |
| 9 | 79.5 | -1.1% | 13.8% |
| 10 | 78.6 | 1.5% | 12.1% |
| 11 | 83.5 | 6.4% | 7.8% |
| 12 | 90.9 | 3.6% | -1.1% |
| 13 | 88.3 | 1.7% | -6.3% |
| 14 | 91.9 | -0.4% | -2.2% |
| 15 | 84.5 | -0.9% | -5.5% |
| 16 | 84.7 | -1.1% | -4.4% |

LED STRIP TM30 DATA

5W | 10W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

3000D | Rf: 90.6 | Rg: 101.1
Color Vector Graphic



| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|--------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 91.5 | -3.5% | 1.3% |
| 2 | 92.2 | -1.8% | 3.0% |
| 3 | 89.3 | 0.5% | 4.8% |
| 4 | 92.7 | -1.1% | 0.6% |
| 5 | 93.3 | 0.5% | 1.4% |
| 6 | 93.8 | 2.7% | -0.8% |
| 7 | 91.2 | -2.1% | -0.2% |
| 8 | 97.0 | -0.5% | -0.7% |
| 9 | 92.5 | -0.7% | 3.8% |
| 10 | 88.3 | 0.9% | 7.1% |
| 11 | 87.5 | 3.9% | 7.6% |
| 12 | 88.2 | 6.2% | -0.2% |
| 13 | 89.9 | 3.4% | -6.0% |
| 14 | 86.9 | 4.4% | -8.5% |
| 15 | 91.9 | -1.9% | -2.9% |
| 16 | 84.7 | -1.3% | -10.6% |


LED STRIP TM30 DATA

5W | 10W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for Tunable White bare LED Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K6K/27K6) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|--------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 87.7 | -5.5% | 1.2% |
| 2 | 88.7 | -3.9% | 4.2% |
| 3 | 90.5 | -1.5% | 4.3% |
| 4 | 95.0 | -1.7% | 0.8% |
| 5 | 95.2 | -0.2% | 2.1% |
| 6 | 94.2 | 1.6% | 1.9% |
| 7 | 95.9 | -0.8% | -2.2% |
| 8 | 95.5 | -1.7% | 1.3% |
| 9 | 93.8 | -1.4 | 2.6% |
| 10 | 91.9 | -0.7% | 4.2% |
| 11 | 91.3 | 3.6% | 3.7% |
| 12 | 91.2 | 4.2% | -1.0% |
| 13 | 86.6 | 3.8% | -12.7% |
| 14 | 67.2 | -3.0% | -16.3% |
| 15 | 84.9 | -3.3% | -9.4% |
| 16 | 84.2 | -5.7% | -7.5% |

3000K (2K6K/27K6) | Rf: 90.5 | Rg: 100.7

Color Vector Graphic




■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|--------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 91.5 | -3.5% | 1.2% |
| 2 | 92.4 | -1.8% | 2.7% |
| 3 | 89.8 | 0.3% | 4.5% |
| 4 | 92.4 | -1.7% | 0.4% |
| 5 | 93.3 | -0.1% | 1.4% |
| 6 | 94.5 | 2.1% | -0.6% |
| 7 | 91.0 | -2.5% | 0.3% |
| 8 | 96.9 | -0.8% | -0.2% |
| 9 | 91.6 | -0.9% | 4.6% |
| 10 | 86.7 | 0.7% | 7.8% |
| 11 | 86.3 | 3.8% | 8.5% |
| 12 | 88.3 | 6.1% | 0.6% |
| 13 | 90.9 | 3.1% | -5.2% |
| 14 | 87.3 | 4.7% | -7.9% |
| 15 | 92.1 | -1.9% | -2.5% |
| 16 | 84.5 | -0.9% | -10.9% |

4000K ONLY (2K6K/27K6) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic



■ Test ■ Reference

| | | GRAPHIC SHIFTS % | |
|---------|------|------------------|-------|
| HUE BIN | Rf | CHROMA | HUE |
| 1 | 86.5 | -5.5% | 1.3% |
| 2 | 90.4 | -3.0% | 2.3% |
| 3 | 89.8 | -2.1% | 3.6% |
| 4 | 89.1 | -3.4% | 0.4% |
| 5 | 88.5 | -5.9% | 0.1% |
| 6 | 93.6 | -3.0% | -0.4% |
| 7 | 88.9 | -6.2% | 1.7% |
| 8 | 87.3 | -5.0% | 4.9% |
| 9 | 82.4 | -3.6% | 11.3% |
| 10 | 77.4 | -1.8% | 12.7% |
| 11 | 79.8 | 4.9% | 11.4% |
| 12 | 88.7 | 4.4% | 2.7% |
| 13 | 88.7 | 4.0% | -5.1% |
| 14 | 91.2 | 2.2% | -3.8% |
| 15 | 82.7 | -0.1% | -9.2% |
| 16 | 82.8 | -2.2% | -7.6% |


LED STRIP TM30 DATA

5W | 10W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

View Angle:2 Deg

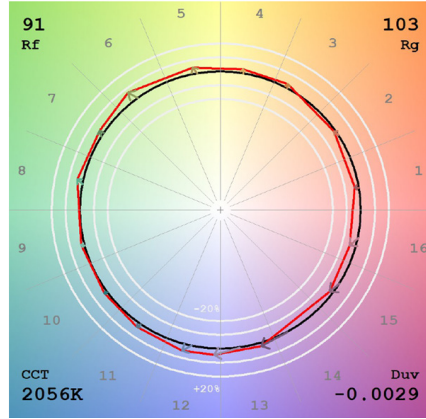


2200K (TruColor™ RGBTW)

View Angle:2 Deg

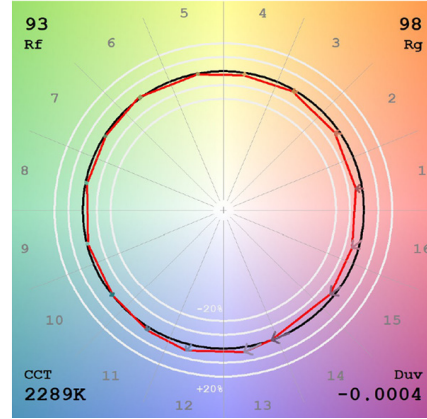


2400K (TruColor™ RGBTW)

View Angle:2 Deg

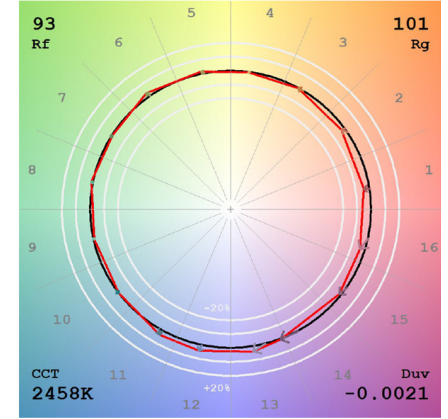


2700K (TruColor™ RGBTW)

View Angle:2 Deg

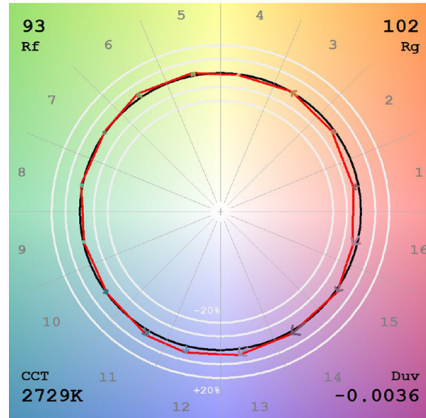


3000K (TruColor™ RGBTW)

View Angle:2 Deg

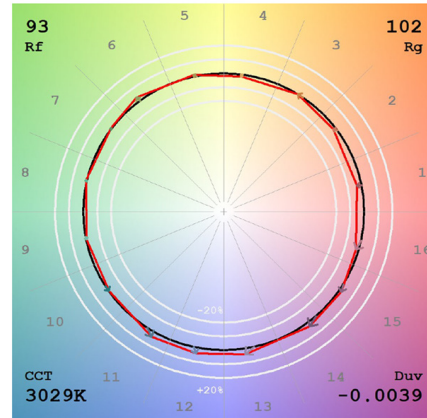


3500K (TruColor™ RGBTW)

View Angle:2 Deg

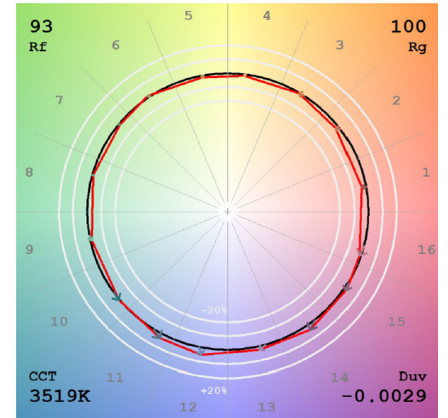


4000K (TruColor™ RGBTW)

View Angle:2 Deg

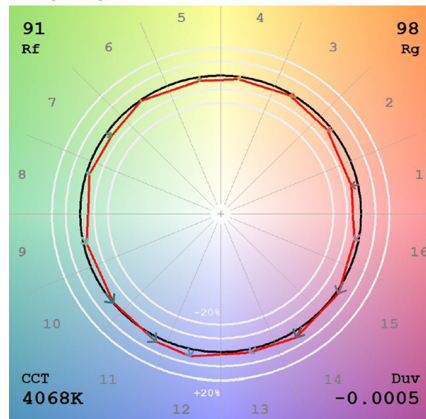


5700K (TruColor™ RGBTW)

View Angle:2 Deg

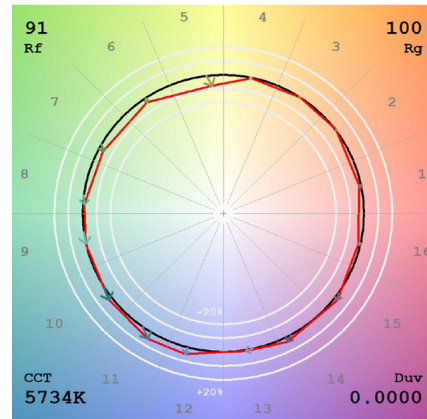

6500K (TruColor™ RGBTW)

View Angle:2 Deg

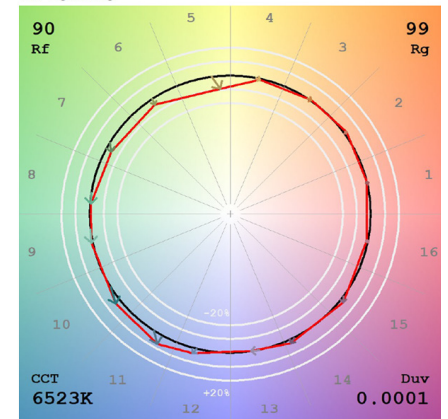

| | | | | | |
|---------|--|--------------|--|------|--|
| PROJECT | | FIXTURE TYPE | | DATE | |
|---------|--|--------------|--|------|--|