


CIRRUS CEILING D1 TRUCOLOR™ RGBTW


24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL



CIRRUS CEILING D1 DOWNLIGHT
(ACTUAL SIZE)



CHANNEL WITH LOUVER
(ACTUAL SIZE)



CHANNEL WITHOUT LOUVER
(ACTUAL SIZE)

DESCRIPTION

Cirrus Ceiling D1 in **TruColor™ RGBTW** with Remote 24VDC Power Supply is a linear LED fixture that offers direct light in a clean, contemporary style. Available in increments from 12"-240" and several metal finish options. Order the Cirrus Ceiling D1 with either a Diffused White Lens with a 100° Beam Spread or a Clear Frosted 60° Lens with a Black or White Louver for additional diffusion. PSBR Power Supply and Remote Bridgebox is required and sold separately (PSBR-96W-24VDC). The PSBR Power Supply can be located up to 40' away from the fixture. The 5 channel WiZ Pro Bridgebox allows for wireless control of the Cirrus luminaire with the WiZ Pro software suite and Pure Smart Wi-Fi Room Controller. Includes a 5-year pro-rated warranty. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

INSTALLATION

- PSBR Power Supply and Remote Bridgebox is required and sold separately (PSBR-96W-24VDC). Remote Power Supply can be located up to 40' away.
- Your choice of Canopy: 1" Rectangle Junction Box with 4 Gang Junction box containing the WiZ Pro 5 Channel Bridgebox or 4.6" Square Canopy or T-Bar end feed, sold separately
- Includes Mounting Clips (every 24")
- Power Supply sold separately. See ordering code below for power supply options.

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 5W5 – Pure Smart™ WiZ Pro: 240" in 3" increments
- 5W7 – Pure Smart™ WiZ Pro: 144" in 3" increments
- 5W10 – Pure Smart™ WiZ Pro: 120" in 3" increments

APPLICATIONS

Designed for indoor use only. Ideal applications are residential, commercial and hospitality projects, as well as general Human Centric Lighting.

FINISHES



Satin Black BK
Antique Bronze BZ



Satin Brass with Black End Caps and Canopy BB
Satin Brass with White End Caps and Canopy BW

TRUCOLOR™ RGB & TUNABLE WHITE LIGHT ENGINE

Pure Smart **TruColor™** technology uses five channels of tunable LEDs, composed of **RGBTW** red, blue, green, and Tunable White (**1500K-6500K**). With our precision-engineered, proprietary color mixing, we produce one of the widest, most accurate spectrums available, giving our customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. **TruColor™** LED's achieve an average CRI-Color Rendering Index of 94+ and a Duv of +-0.0020 in relation to the blackbody curve at any point on the spectrum of tunable white CCT. Dynamic Color Changing functionality provides millions of possibilities for intricate customization, rich saturated secondary colors, and unprecedented ease of installation, making **RGBTW** the ideal choice for residential and commercial applications. **TruColor™ RGBTW** adds more than just decorative flexibility; it also helps to support a healthy Circadian Rhythm and well-being. Let **TruColor™** transform your space and the people within it. **TruColor™ RGBTW** is optimized for control with WiZ Pro Wi-Fi based smart control system.

LENS

Diffused White 100° or Clear Frosted 60° Lens offered with Black or White Louvers

LUMEN PERFORMANCE

- TruColor™ **RGBTW** Red, Green, and Blue with Tunable White (**1500K-6500K**)
- 5W5 195lm/ft 5W @3000K
- 5W7 284lm/ft 7W @3000K
- 5W10 336lm/ft 7W @3000K

AVERAGE PERFORMANCE 2000K-5500K

- Average CRI: 94+
- Average DUV: +-0.0020
- Average R9: 91, RG: 99.5, RF:91.9
- Average Life: 50,000 hours

REMOTE POWER SUPPLIES, BRIDGEBOXES, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Pure Smart™ WiZ Pro PSBR Power Supplies](#)

See page 6 for drywall or wood ceiling Bridgebox (C-1RE4G-WZ-TCXXX-FN) Pure Smart™ PSBR Power Supply for Remote Bridgebox is developed to support Pure Smart TC TruColor RGBTW luminaires connected by WiZ Pro.

- [Pure Smart™ Wi-Fi Controller](#)

Features ON/OFF buttons, CCT and brightness control as well as four preset/custom scenes programmable in the WiZ app. Communicates via 2.4GHz Wi-Fi. No Hub needed. Voice control with Google Assistant, Alexa, Siri, Shortcuts, and IFTTT

APPROVALS

Class2 Wiring up to 100 watts, Indoor Damp Location, ETL listed, RoHS.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

System	Wattage Per Foot	Canopy	Nominal Size In Inches	Color Temperature	Finish
CCDS	5W5	1R4	120	TC	SN
CCDS Cirrus Ceiling Diffused White 100" Lens CCCW Cirrus Ceiling Clear Frosted Lens with White Louver CCCB Cirrus Ceiling Clear Frosted Lens with Black Louver	5W5 5 watts RGB & 5 Watts Tunable White 5W7 5 watts RGB & 7 Watts Tunable White 5W10 5 watts RGB & 10 Watts Tunable White	1R4 Drywall or wood ceiling 1" Rectangle Canopy with 4 Gang Junction Box TBA T-Bar Ceiling Mounting Clips are compatible with 15/16" and 9/16" T-Bar systems where the ceiling panels are flush with the grid, and 15/16" tegular ceiling panels. TBB T-Bar Ceiling Mounting Clips are compatible with 15/16" T-Bar systems where the ceiling panels sit below T-Bar grid (includes spacer). TBC T-Bar Ceiling TBC clips are compatible with Armstrong Optima™ T-Bar systems where the ceiling panels are flush with the bottom of the grid TBD T-Bar Ceiling Mounting Clips are compatible with 9/16" T-Bar systems where the ceiling panels sit below T-Bar grid (includes spacer). TBE T-Bar Mounting Clips are compatible with Slotted T-Bar Drop Ceiling systems with ¼" openings, and mounts flush anywhere along the T-Bar grid. TBI T-Bar Mounting Clips are compatible with Armstrong Interlude™ T-Bar systems where the ceiling panels are flush with the bottom of the grid. TBM T-Bar Magnetic Tape is compatible with flat metal ceilings such as Armstrong Metalworks™	12-240" Pure Smart WIZ Pro, (5W5) 12-144" Pure Smart WIZ Pro, (5W5) 12-120" Pure Smart WIZ Pro, (5W10) *See length chart for on pg 2 for exact dimensions	TC TruColor RGBTW Red, Green, Blue & Tunable White 1500K-6500K	BK Satin Black BZ Antique Bronze CH Chrome SA Satin Aluminum SN Satin Nickel WH White BB Satin Brass with Black End Caps and Canopy BW Satin Brass with White End Caps and Canopy

NOMINAL LAMP DATA

	CCDS																											
DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									5W7 5W RGB & 7W TUNABLE WHITE									5W10 5W RGB & 10W TUNABLE WHITE									
WATTS PER FOOT	5W Maximum									7W Maximum									10W Maximum									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	92	138	168	188	195	205	222	156	143	114	190	244	277	284	299	293	172	156	121	194	260	305	336	360	351	197	179	
LUMENS PER WATT (lm/w)	34	30	39	44	46	47	53	53	52	34	49	40	47	46	49	50	50	49	35	24	33	40	43	46	42	54	45	
CRI	92	94	95	95	96	97	97	92	90	93	95	96	97	97	98	97	95	93	93	95	96	97	97	98	97	94	92	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.0030	0.0002	0.0030	0.0030	0.0030	0.0009	0.0000	0.0030	0.0030	-0.0028	-0.0005	-0.0022	-0.0035	-0.003	-0.0011	-0.0001	-0.0038	-0.0048	
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91	92	93	95	95	95	95	94	92	91	
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103	104	100	103	104	103	102	100	102	103	
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67	91	90	90	94	95	93	90	79	69	
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88	92	94	96	96	97	100	99	92	89	
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85	99	99	99	99	99	98	97	90	86	
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2	3.5	8	7.9	7.7	7.85	7.8	8.3	3.65	4	

	CCCW																											
DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									5W7 5W RGB & 7W TUNABLE WHITE									5W10 5W RGB & 10W TUNABLE WHITE									
WATTS PER FOOT	5W Maximum									7W Maximum									10W Maximum									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	80	120	146	164	169	179	193	136	125	99	165	212	241	247	260	255	150	136	105	169	227	266	292	314	305	172	156	
LUMENS PER WATT (lm/w)	30	26	88	39	40	103	46	116	45	30	43	35	41	40	42	44	43	42	30	21	29	35	37	40	37	47	39	
CRI	92	94	95	95	96	97	97	92	90	93	95	96	97	97	98	97	95	93	93	95	96	97	97	98	97	94	92	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.0030	0.0002	0.0030	0.0030	0.0030	0.0009	0.0000	0.0030	0.0030	-0.0028	-0.0005	-0.0022	-0.0035	-0.003	-0.0011	-0.0001	-0.0038	-0.0048	
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91	92	93	95	95	95	95	94	92	91	
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103	104	100	103	104	103	102	100	102	103	
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67	91	90	90	94	95	93	90	79	69	
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88	92	94	96	96	97	100	99	92	89	
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85	99	99	99	99	99	98	97	90	86	
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2	3.5	8	7.9	7.7	7.85	7.8	8.3	3.65	4	

	CCCB																											
DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									5W7 5W RGB & 7W TUNABLE WHITE									5W10 5W RGB & 10W TUNABLE WHITE									
WATTS PER FOOT	5W Maximum									7W Maximum									10W Maximum									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	63	95	115	129	133	141	152	107	98	78	130	167	190	195	205	201	118	107	83	133	178	209	230	247	240	135	123	
LUMENS PER WATT (lm/w)	23	21	88	30	31	103	36	116	36	23	34	27	32	32	33	34	34	33	24	17	23	27	29	32	29	37	31	
CRI	92	94	95	95	96	97	97	92	90	93	95	96	97	97	98	97	95	93	93	95	96	97	97	98	97	94	92	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.0030	0.0002	0.0030	0.0030	0.0030	0.0009	0.0000	0.0030	0.0030	-0.0028	-0.0005	-0.0022	-0.0035	-0.003	-0.0011	-0.0001	-0.0038	-0.0048	
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91	92	93	95	95	95	95	94	92	91	
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103	104	100	103	104	103	102	100	102	103	
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67	91	90	90	94	95	93	90	79	69	
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88	92	94	96	96	97	100	99	92	89	
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85	99	99	99	99	99	98	97	90	86	
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2	3.5	8	7.9	7.7	7.85	7.8	8.3	3.65	4	

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

LENGTH CHARTS

LENGTH, LOAD, AND LUMEN CHART							
Ordering Code (Nominal Size)	Actual Length (Inches)	5W5 (Total Watts)	Total Lumens 5W5 at 30K	5W7 (Total Watts)	Total Lumens 5W7 at 30K	5W10 (Total Watts)	Total Lumens 5W10 at 30K
12	14	5	7	10	195	284	336
15	17	6	9	13	244	355	420
18	20	8	11	15	293	426	504
21	23	9	12	18	341	497	588
24	26	10	14	20	390	568	672
27	29	11	16	23	439	639	756
30	32	13	18	25	488	710	840
33	35	14	19	28	536	781	924
36	38	15	21	30	585	852	1008
39	41	16	23	33	634	923	1092
42	44	18	25	35	683	994	1176
45	47	19	26	38	731	1065	1260
48	50	20	28	40	780	1136	1344
51	53	21	30	43	829	1207	1428
54	56	23	32	45	878	1278	1512
57	59	24	33	48	926	1349	1596
60	62	25	35	50	975	1420	1680
63	65	26	37	53	1024	1491	1764
66	68	28	39	55	1073	1562	1848
69	71	29	40	58	1121	1633	1932
72	74	30	42	60	1170	1704	2016
75	77	31	44	63	1219	1775	2100
78	80	33	46	65	1268	1846	2184
81	83	34	47	68	1316	1917	2268
84	86	35	49	70	1365	1988	2352
87	89	36	51	73	1414	2059	2436
90	92	38	53	75	1463	2130	2520
93	95	39	54	78	1511	2201	2604
96	98	40	56	80	1560	2272	2688
99	101	41	58	83	1609	2343	2772
102	104	43	60	85	1658	2414	2856
105	107	44	61	88	1706	2485	2940
108	110	45	63	90	1755	2556	3024
111	113	46	65	93	1804	2627	3108
114	116	48	67	95	1853	2698	3192
117	119	49	68	98	1901	2769	3276
120	122	50	70	100	1950	2840	3360

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL




SATIN ALUMINUM FINISH




SATIN BLACK FINISH




ANTIQUE BRONZE FINISH

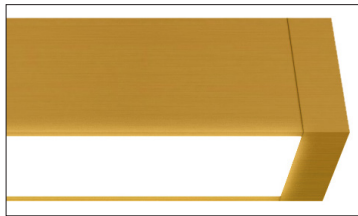

SATIN BRASS FINISH

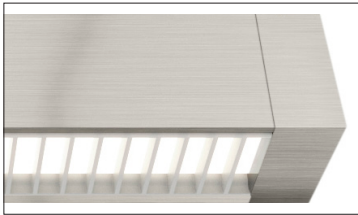


DIFFUSED WHITE LENS WITH WHITE LOUVER

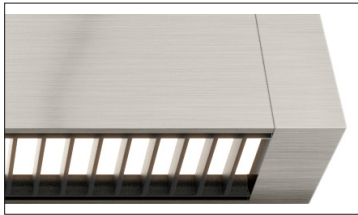



DIFFUSED WHITE LENS WITH BLACK LOUVER



CLEAR FROSTED LENS WITH WHITE LOUVER

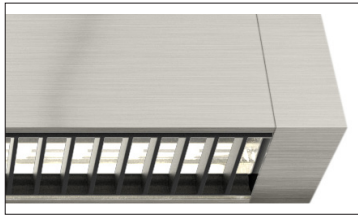

CLEAR FROSTED LENS WITH BLACK LOUVER

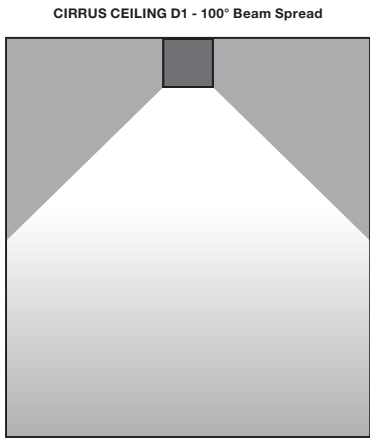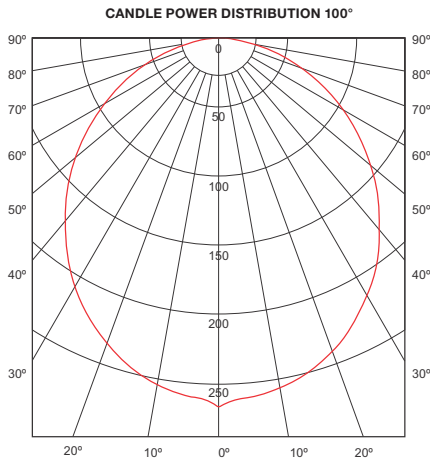

5W5 Watt 100°	
Distance	Foot Candles
1'	285
1.5'	127
2'	71
3'	32
4'	18
5'	11.5
6'	8
7'	6
8'	5

5W7 Watt 100°	
Distance	Foot Candles
1'	390
1.5'	173
2'	97.5
3'	43.3
4'	24.4
5'	15.6
6'	10.8
7'	8
8'	6


5W10 Watt 100°	
Distance	Foot Candles
1'	445
1.5'	198
2'	111
3'	49.4
4'	28
5'	17.8
6'	12.4
7'	9
8'	7

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

DRAWINGS Canopy & Channel drawings for the Cirrus Ceiling D1

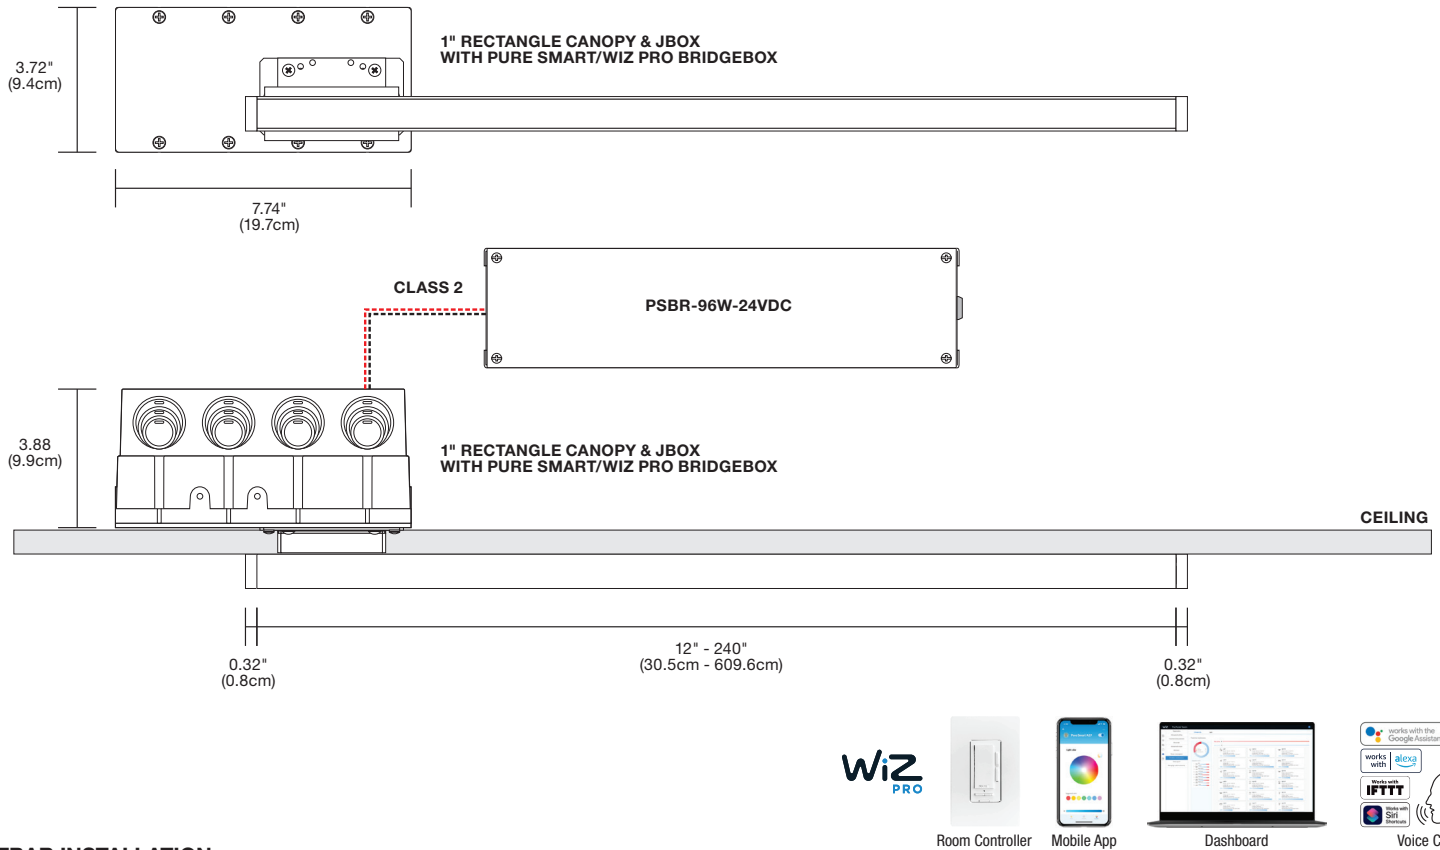

TBAR INSTALLATION

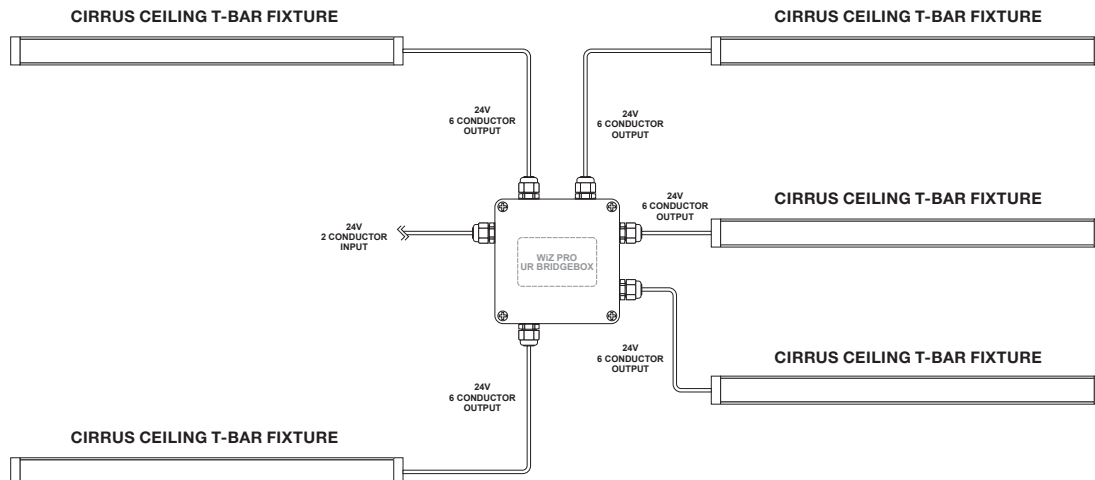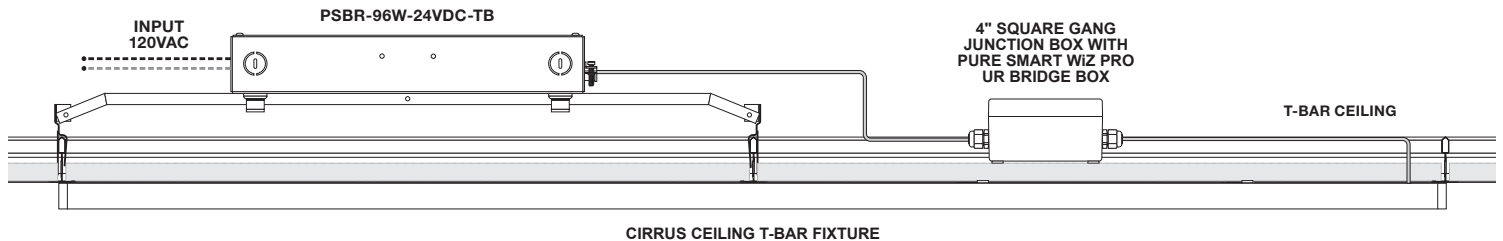


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL


COMPONENTS J-box, Split Canopies, & Mounting Clips are included and sold separately for replacement only

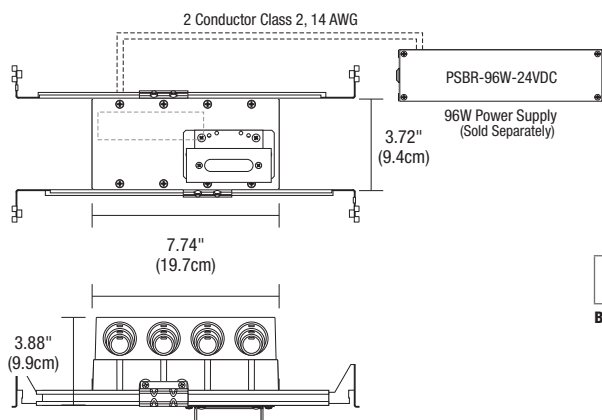

1" RECTANGLE CANOPY WITH 4 GANG JUNCTION BOX AND PURE SMART WIZ PRO CV BRIDGEBOX FOR DRYWALL OR WOOD CEILING

The slim profile 1RE Canopy with 4 Gang Junction Box comes with adjustable hanger bars and a Pure Smart WIZ Pro 96 watt CV bridgebox allowing for 5-channel, wireless control of the TruColor RGBTW Cirrus Luminaire. Two Class 2, 14AWG stranded conductors from the Remote Power Supply up to 40 ft away are required.


System	Canopy	Wattage	Control	Color Temperature	System Code
BR	1RE4G	96W	WZ	TC5W5	CL
BR Bridgebox Remote	1RE4G 1" Rectangle Canopy with 4 Gang Junction Box	96W 96 Watts	WZ WIZ pro Connected CV Smart Bridgebox Included	TC5W5 TruColor™ 5 watts RGB & 5 watts Tunable White TC5W7 TruColor™ 5 watts RGB & 7 watts Tunable White TC5W10 TruColor™ 5 watts RGB & 10 watts Tunable White	CL Ceiling Linear

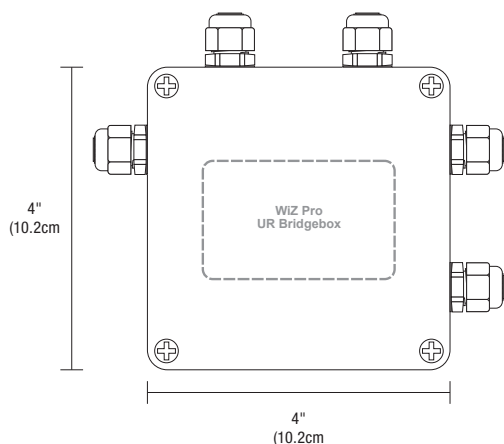

T BAR DROP CEILING SURFACE 4" SQUARE GANG JBOX AND PURE SMART WIZ PRO UR BRIDGEBOX

The 4" Square Junction Box located above Tbar ceiling includes connectors for fast and secure connection to the RGBTW Cirrus fixture and Pure Smart WIZ Pro 96 watt UR bridgebox allowing for 5-channel, wireless control of the TruColor™ RGBTW Cirrus. Requires two Class 2, 14 AWG stranded conductors from the Remote Power Supply up to 40 ft away. Can be quick shipped for rough-in.

Type	Component	Wattage	Control System	Color Temperature Options	System
BR	4SQ	96W	WZ	TC5W5	CL
BR Bridgebox Remote	4SQ 4 Square Junction Box, 1 to 5 connector outputs	96W 96 Watts	WZ WIZ pro Connected UR Smart Bridge box Included	TC5W5 TruColor™ 5 watts RGB & 5 watts Tunable White TC5W7 TruColor™ 5 watts RGB & 7 watts Tunable White TC5W10 TruColor™ 5 watts RGB & 10 watts Tunable White	CL Ceiling Linear

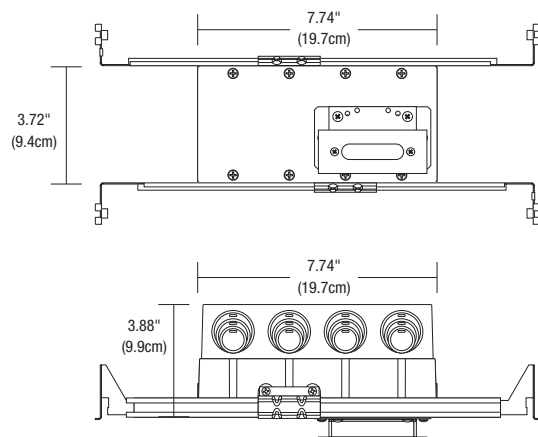

CEILING SURFACE 1" RECTANGLE CANOPY & 4 GANG JUNCTION BOX (INCLUDED WITH COMPLETE FIXTURE ORDERING CODE)

The Junction Box opening is covered by the fixture for a clean no Canopy look. Includes 4 gang Junction Box with adjustable bar hangers. Includes a Goof Plate, for poor plastering around J-box. Can be quick shipped for rough-in.


Type	Component	Ceiling/Wall Type
C	1RE	JB4G
C Channel	1RE 1" Rectangle End Feed	JB4G 6 Conductor 4 Gang Junction Box

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL


REPLACEMENT PARTS

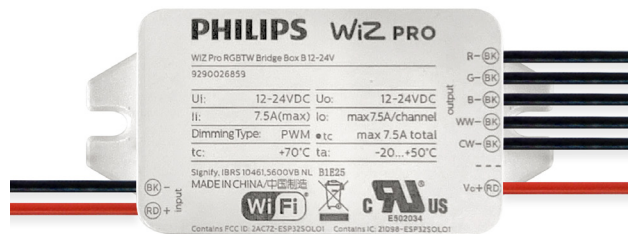

PURE SMART/WIZ PRO UR BRIDGEBOX

WIZ Pro UR Bridgebox is included with 4" Square Junction for TBar ceilings and allows for integration into the WIZ Pro wireless control ecosystem. The part numbers below are to be used for replacement only. Pure Smart/WIZ Pro UR Bridgeboxes are pre-programmed with Pure Smart app icons, and proprietary color mixing for tunable white and RGBTW.


Type	Wattage	Color Temperature Options	System
BR	UR96W	TC5W5	CL
BR Bridgebox	UR96W 96 Watt UR Bridgebox	TC5W5 TruColor™ RGBTW 5 watts RGB & 5 watts Tunable White TC5W7 TruColor™ RGBTW 5 watts RGB & 7 watts Tunable White TC5W10 TruColor™ RGBTW 5 watts RGB & 10 watts Tunable White	CL Ceiling Linear



PURE SMART/WIZ PRO CV BRIDGEBOX

WIZ Pro CV Bridgeboxes are included with 1R4 Canopy and allow for integration into the WIZ Pro wireless control ecosystem. The part numbers below are to be used for replacement only. Pure Smart/WIZ Pro CV Bridgeboxes are pre-programmed with Pure Smart app icons, and proprietary color mixing for tunable white and RGBTW.

Type	Component	Color Temperature Options	System
BR	CV96W	TC5W5	CL
BR Bridgebox	CV96W Slim Profile WIZ Bridgebox	TC5W5 TruColor™ RGBTW 5 watts RGB & 5 watts Tunable White TC5W7 TruColor™ RGBTW 5 watts RGB & 7 watts Tunable White TC5W10 TruColor™ RGBTW 5 watts RGB & 10 watts Tunable White	CL Ceiling Linear

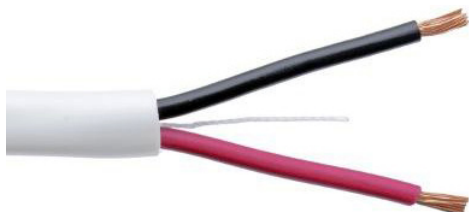

14/2 PLENUM RATED CABLE

White 14 AWG , 2 Conductors with CMP-Plenum rated jacket and 99.99% OFC stranded bare copper. Necessary from Remote Power Supply to fixture up to 40' away. Cable sold by the foot.

Product	Gauge Size	Conductors
PLEN	14G	2C
PLEN Plenum Cable	14G 14 Gauge	2C 2 Conductors



PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW


24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

COMPONENTS T-Bar Mounting Options for Cirrus

9/16" TBAR 15/16" TBAR

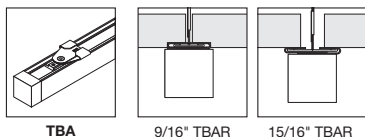

CIRRUS BETWEEN
DROP CEILING TILES





CEILING MOUNTING T-BAR CLIPS FOR 15/16" AND 9/16" CEILING GRID


TBA mounting clips are compatible with 15/16" and 9/16" T-Bar systems where the ceiling panels are flush with the grid, and 15/16" tegular ceiling panels.

System	Canopy	Type	Finish
CC	MCL	TBA	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBA T-Bar Clip	WH White BK Black

9/16" TBAR 15/16" TBAR



CIRRUS BETWEEN
AND ACROSS
DROP CEILING TILES





CEILING MOUNTING T-BAR CLIPS FOR 15/16" AND 9/16" CEILING GRID


TBB mounting clips are compatible with 15/16" and 9/16" T-Bar systems where the ceiling panels sit below T-Bar grid (includes spacer).

System	Canopy	Type	Finish
CC	MCL	TBB	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBB T-Bar Clip	WH White BK Black

OPTIMA PB VECTOR



OPTIMA PB
VECTOR CEILING,
CIRRUS BELOW
DROP CEILING TILES





T-BAR CLIP FOR ARMSTRONG™ OPTIMA PB VECTOR


TBC Mounting clips are compatible with Armstrong PB Vector™ 15/16" T-Bar systems with 1/4" reveal ceiling panels.

System	Canopy	Type	Finish
CC	MCL	TBC	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBC T-Bar Clip	WH White BK Black

SLOTTED T-BAR



SLOTTED T-BAR
DROPPED CEILING,
CIRRUS BELOW
DROP CEILING TILES




T-BAR SLOT MOUNTING CLIP


TBE Mounting clips are compatible with Slotted T-Bar Drop Ceiling systems with 1/4" openings, and mounts flush anywhere along the T-Bar grid.

System	Canopy	Type	Finish
CC	MCL	TBE	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBE T-Bar Clip	WH White BK Black

ARMSTRONG®
INTERLUDE XL HRC



ARMSTRONG
INTERLUDE™ T-BAR,
CIRRUS BELOW
DROP CEILING TILES



T-BAR INTERLUDE CLIP


TBI Mounting clips are compatible with Armstrong Interlude™ T-Bar systems where the ceiling panels are flush with the bottom of the grid.

System	Canopy	Type	Finish
CC	MCL	TBI	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBI T-Bar Clip	WH White BK Black

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL



TBM




T-BAR MAGNETIC TAPE

TBM Magnetic Tape is compatible with flat metal ceilings such as Armstrong Metalworks™.


System	Canopy	Type	Finish
CC	MCL	TBM	WH
CC Cirrus Ceiling	MCL Mounting Clip	TBM T-Bar Clip	WH White BK Black

COMPONENTS Drywall Mounting Options for Cirrus



CC-MCL


DRYWALL CEILING



CEILING MOUNTING SPRING CLIP


Ceiling Mounting Spring clips are provided with every 2ft of Cirrus Ceiling Channel. The Clip snaps into the channel, staying securely fastened to the ceiling or wall.

System	Canopy
CC	MCL
CC Cirrus Ceiling	MCL Mounting Clip



CC-MCL-L


DRYWALL CEILING



CEILING MOUNTING LOCKING CLIP


Ceiling Mounting Locking Clips may be ordered separately for extra support. The channel slides into the clip and locks in place staying securely fastened to the ceiling or to the wall.

System	Canopy	Type
CC	MCL	L
CC Cirrus Ceiling	MCL Mounting Clip	L Locking



CCD1M-MCL-FL

DRYWALL CEILING



FORK LOCKING CLIP

Fork locking clip for ceiling or wall Mounting. The channel slides into the Fork locking Clip keeping the fixture secure.


System	Canopy	Type
CC	MCL	FL
CC Cirrus Ceiling	MCL Mounting Clip	FL Fork Locking

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS CEILING D1 TRUCOLOR™ RGBTW

24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

WIRING DIAGRAM: Pure Smart™ Wi-Fi Enabled Power Supplies and Controls

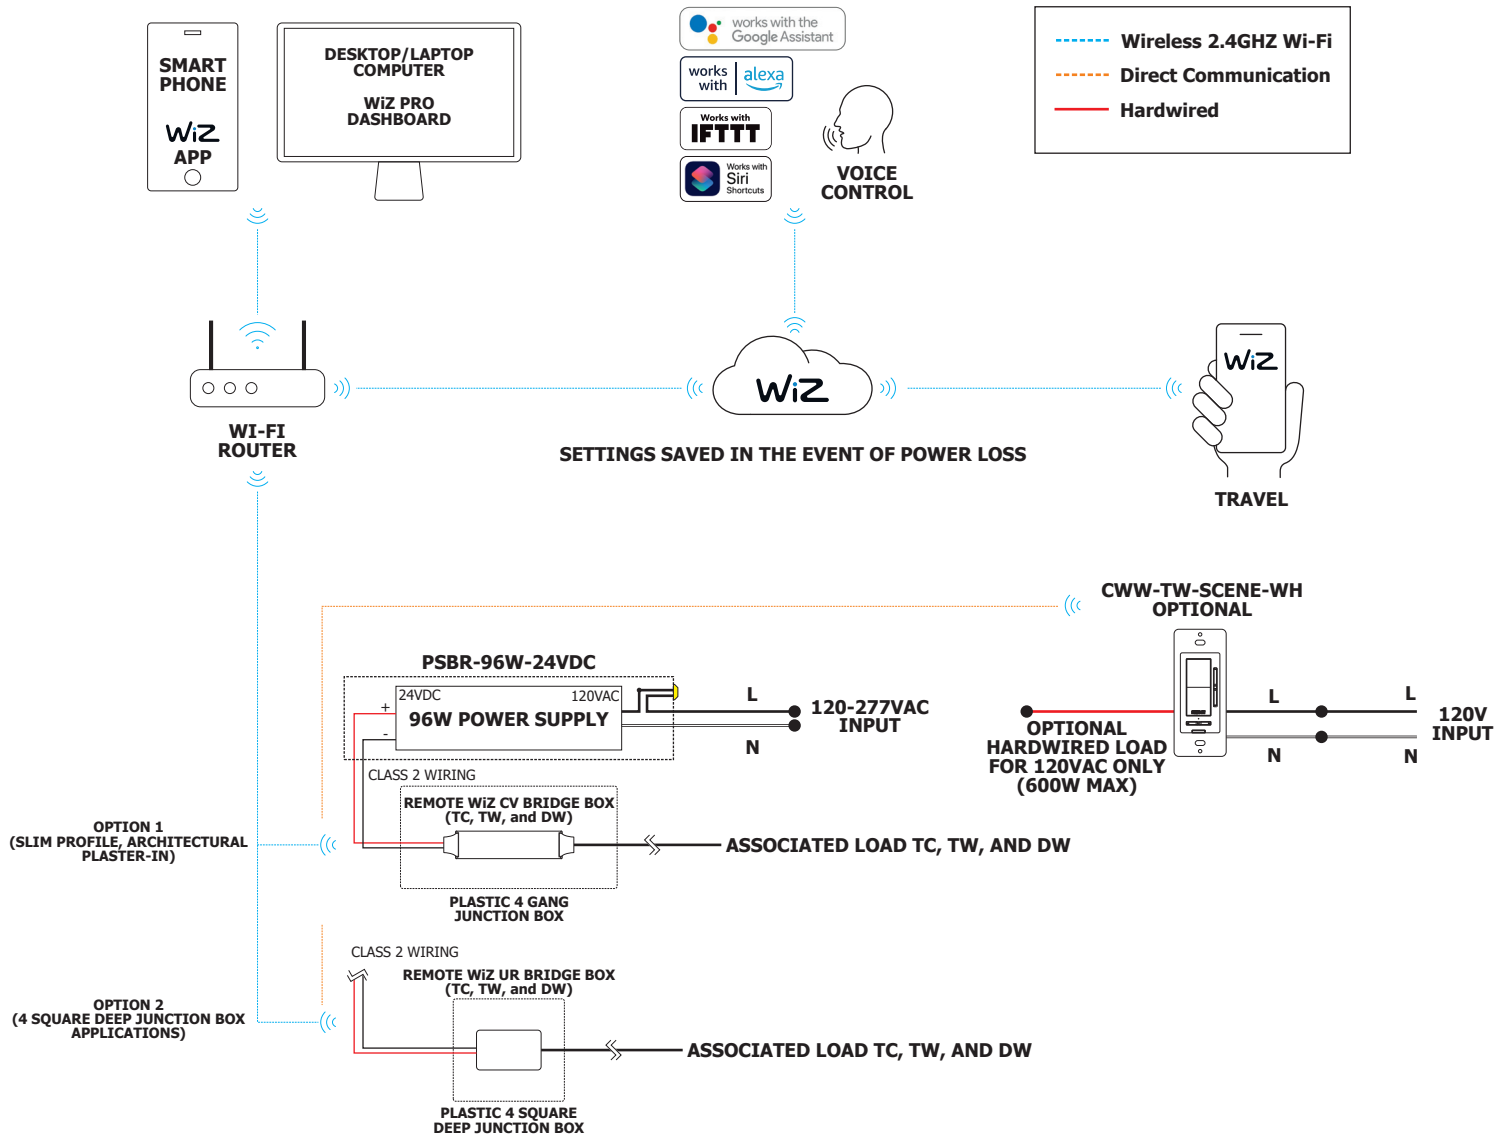

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PURE SMART™ Wi-Fi ROOM CONTROLLER

CONNECTED BY WIZ PRO



DESCRIPTION:

The Pure Smart™ Wi-Fi Room Controller works with any WiZ Connected Smart fixtures/lamps. The Room Controller grants independent adjustment of both color temperature and intensity, as well as scene selection for Single Channel/Static, Tunable White, and TruColor™ RGBTW Fixtures. Four preset scenes can be associated with the room controller via the WiZ App. Custom scenes can be created using multiple layers of light, colors, and can include Pure Smart Wi-Fi Dimmer and Switch as well. No Hub required. Communicates to the WiZ app and WiZ Pro Dashboard through connection to 2.4GHz Wi-Fi and the cloud. Room Controller communicates with fixtures directly on the Local Area Network allowing for control even if the Wi-Fi goes down. Compatible with WiZ Connected fixtures only.

OPERATION

Features ON/OFF buttons, CCT and brightness control rockers, and 4 preset/custom scene selections. Maximum output of 600W for hardwired WiZ Connected devices. No load restriction when load wire is not used and devices are connected wirelessly to Room Controller. Communicates with 2.4GHz Wi-Fi only. No Hub Required.

EASY INSTALLATION

The Pure Smart™ Wi-Fi Room Controller installs just like a traditional dimmer. Compatible with standard gangable boxes. Requires neutral wire. No Hub Required.

WIZ APP

The Room Controller is added as an accessory in the WiZ app (Available on iOS or Android) and communicates directly to the WiZ enabled light fixture via direct wi-fi signal on Local Area Network (LAN). Voice control enabled when used in conjunction with Google Assistant, Siri, Alexa, IFTTT, and SmartThings. Grouping, zoning, scheduling, and custom scenes can all be programmed with the WiZ app or WiZ Pro Dashboard.

BODY

Durable polycarbonate body, compatible with decorator style wall plate (not included).


SECURITY

3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

SPECIFICATIONS

Approved Location	Dry / Indoor
Input Voltage	120Vac - 60 Hz
Certification	cULus, FCC
Compatible Load(s)	WiZ Connected products only
Maximum Power	600W (Hardwired Loads), No Maximum for Wireless Loads
Output Current	5A
Power Consumption	Relay OFF: 0.07W Soft OFF: 0.79W ON: 0.79W
Dimming	Dims to 3%
Operating Temperature	23°F~113°F (-5°C~45°C)
Wireless Frequency	2.4GHz
Wireless Standard	IEEE 802.11
Warranty	3 Year

Product	Type	Finish
CWW	TW-SCENE	WH
CWW Controller, Wall Mount, WiZ Pro connected	TW-SCENE Tunable White + Scenes	WH White

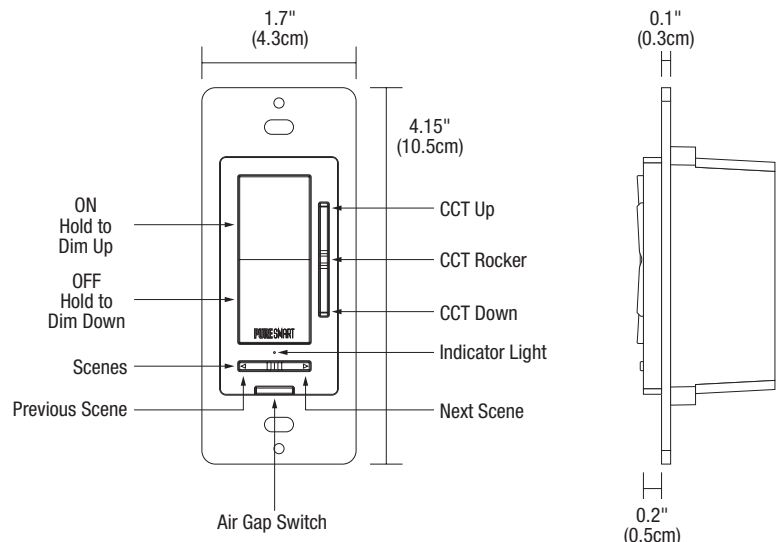


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TM30 DATA


24VDC DOWNLIGHT, REMOTE POWER, 5 CHANNEL WIZ PRO CONTROL

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

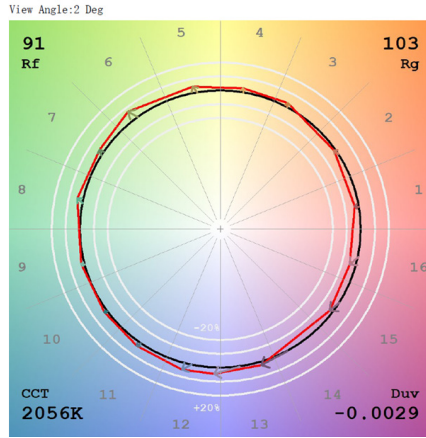


2200K (TruColor™ RGBTW)

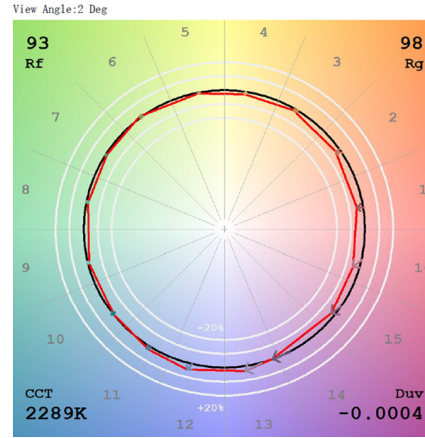


2400K (TruColor™ RGBTW)

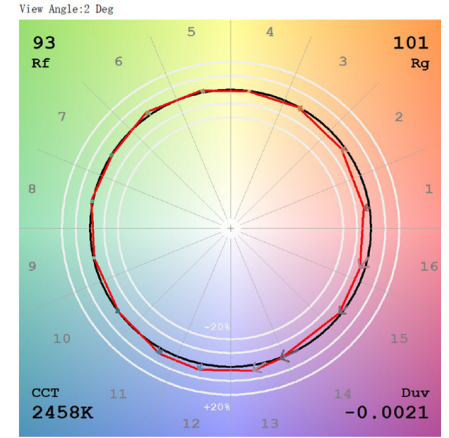


2700K (TruColor™ RGBTW)

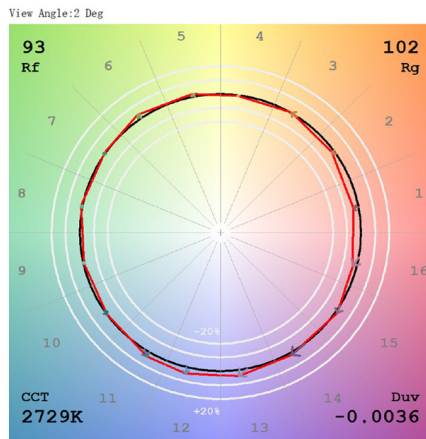


3000K (TruColor™ RGBTW)

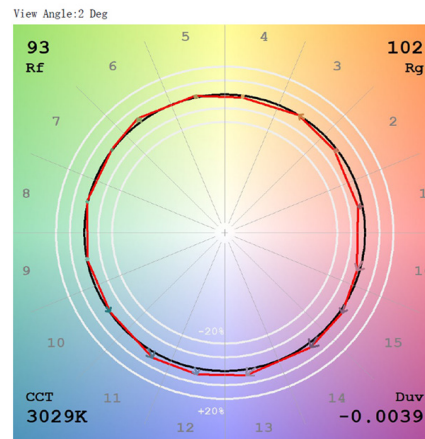


3500K (TruColor™ RGBTW)

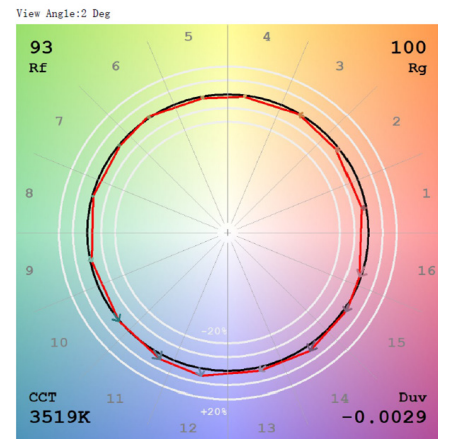


4000K (TruColor™ RGBTW)

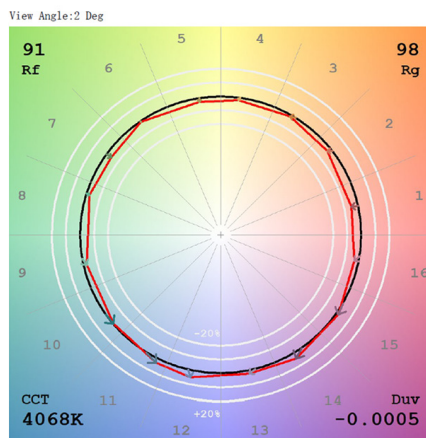

5700K (TruColor™ RGBTW)

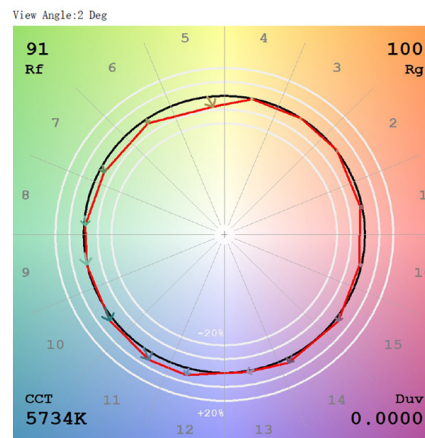

6500K (TruColor™ RGBTW)

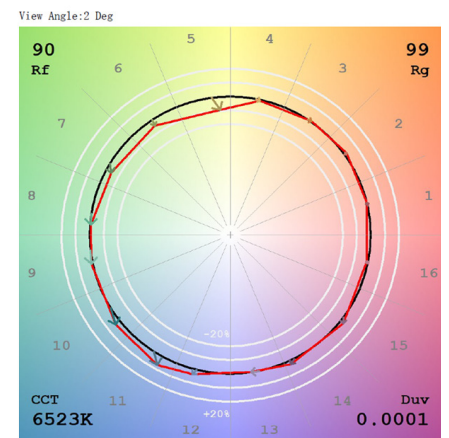

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--