

CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED



DESCRIPTION

Cirrus T1 Suspension Downlight Center feed with Dynamic/Tunable White is a linear LED fixture that offers soft yet clean illumination through a Diffused White Tubular Lens with a 176° Beam Spread. Dynamic Tunable White technology grants independent control for adjusting color temperature and brightness. The **2K4K** option provides a range of 2000K (Amber) through 4000K (Neutral White), ideal for residential and hospitality settings. The **27K6** option ranges from 2700K (Warm White) through 6500K (Cool White), suitable for healthcare, education, office and other commercial applications. Use with two dimmers or our proprietary Tunable White Controller for fast and accurate adjustment with three pre-set scenes (Ordered separately). Available in various incremental lengths from 36" – 120" with several metal finish options. Order **CSD_P** with power supplies included in the Canopy or **CSD_R** remote power supplies sold separately. Optional Fast Jack 12V Port Canopy (**C1**) for mounting Fast Jack fixtures to easily accommodate a variety of moods and tasks. Fixture includes a 5-year pro-rated warranty. For custom lengths and quotes, email our design team design@PureEdgeLighting.com.

LAMPING

Tunable White: 5 or 10 Watts per foot
Average LED life: 60,000 hrs @ normal usage


ELECTRICAL

CST1P: Power Supplies in Canopy
Power: 120VAC/24V 2x Uni-Drivers Optional Fast Jack Power Supply; 12VAC electronic low voltage LED power supply
Dimming*: Dual ELV, Triac (Magnetic) or 0-10V
Average LED life: 60,000 hrs @ normal usage
CST1R: Remote Power Supply Options
Power: 24VDC Class 2 wiring, 2x UNIVERSAL Remote Power Supplies (Sold separately, pgs 5-8). Optional Fast Jack Power Supply; 12VAC electronic low voltage LED power supply.

Power Consumed: 5 or 10 watts per foot

*Dimmers not included

FINISHES

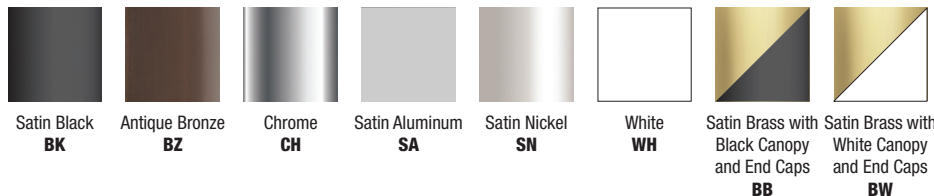

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
CST1P	5W	C	120	2K4K	SN
CST1P Cirrus Suspension Tubular 1 Lens, with Power CST1R Cirrus Suspension Tubular 1 Lens with Remote Power	5W 5 Watts 10W 10 Watts	C Center Feed C1 Center Feed with Fast Jack Port	36-120 Order in various increments from 36"-120". Maximum shipping length for Chrome is 84". *See length chart on pg 2 for exact dimensions	2K4K Tunable White 2000K-4000K 27K6 Tunable White 2700K-6500K	BK Satin Black BZ Antique Bronze CH Chrome SA Satin Aluminum SN Satin Nickel WH White BB Satin Brass with Black Canopy and End Caps BW Satin Brass with White Canopy and End Caps

LUMEN PERFORMANCE

Tunable White:	5 Watts @ 30K	10 Watts @ 30K
Lumen Output:	346 Lm/Ft	700 Lm/Ft
Efficiency:	75 Lm/Ft	76 Lm/Ft
CRI:	92+	92+
Beam Angle:	140°	

PHYSICAL ATTRIBUTES

Lens: Tubular Diffused White 176° Beam Spread
Canopy: Includes a 12" Rectangular Canopy used for sizes 36"-96", or a 26" Rectangular Canopy is used for sizes 99"-120"; Optional Fast Jack 12V Port (**C1**) for mounting Fast Jack 12V fixtures
Mounting: Includes adjustable 12' Coaxial Cables (additional Aircraft Cables included for support when fixture exceeds 72")

DIMMERS & CONTROLS (SOLD SEPARATELY)

- UNI Driver with Universal Dimming (TRIAC, ELV, 0-10V) with corresponding dimmer
- DMX: Dynamic Color Changing In-Wall Mounting
- Lutron Hi-Lume®

*In-Wall Mounting Kits available for select power supplies

**Dynamic/Tunable White- Requires two dimmers (one for 2000K and one for 4000K) or use our proprietary Tunable White Controller CDMX-1

WARRANTY 5 Year Pro-Rated

APPROVALS

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed.
Title 24 with Universal Power Supply, 0-10V or Lutron power supplies,
Made in America

APPLICATIONS

Indoor Damp Location - Ideal applications in Residential, Commercial, Retail, and Hospitality environments

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED

NOMINAL LAMP DATA: Lamp data for the Cirrus Suspension T1

	TUNABLE WHITE 2K4K													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	274	288	303	317	346	360	374	479	527	576	672	700	716	636
LUMENS PER WATT (lm/w)	69	63	66	69	75	78	93	60	62	65	70	76	78	80
CRI	83+	83+	92+	92+	92+	94+	94+	83+	83+	92+	92+	92+	94+	94+


	TUNABLE WHITE 27K6													
WATTS PER FOOT	5W							10W						
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	343	353	364	374	360	356	344	652	671	691	711	684	676	654
LUMENS PER WATT (lm/w)	86	88	89	87	88	89	88	82	73	75	77	74	73	82
CRI	93+	93+	94+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+

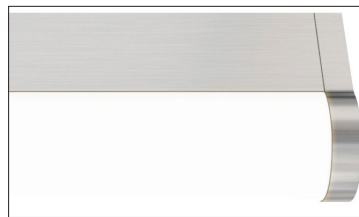


DIFFUSED WHITE LENS



C1 CANOPY, SHOWN WITH FJ PISTON IN SATIN NICKEL (FJ PISTON SOLD SEPARATELY)

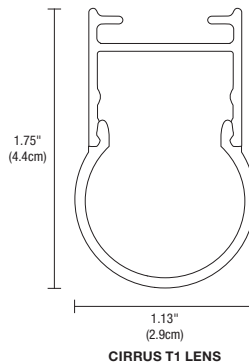

CIRRUS T1 LENS

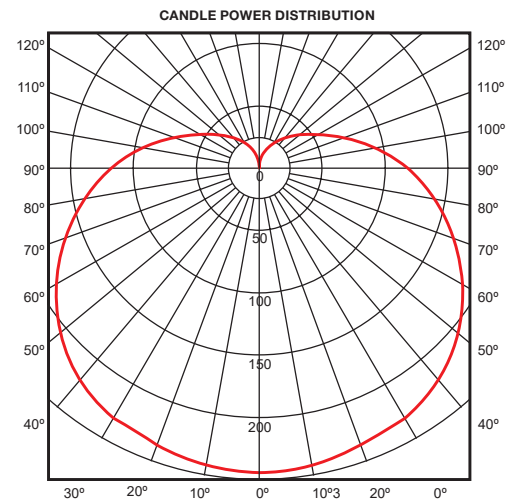

176° BEAM SPREAD



8', 176° AT 3000K			
5 Watt 100°		10 Watt 100°	
Distance	Foot Candles	Distance	Foot Candles
1'	110	1'	183
1.5'	71	1.5'	123
2'	54	2'	91
3'	36	3'	60
4'	26	4'	43
5'	19	5'	32
6'	15	6'	25
7'	12	7'	20
8'	10	8'	18

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED

LENGTH CHART Actual lengths for Cirrus Suspension T1

		5W (2K4K)			10W (2K4K)		
		WITH TWO DIMMERS: YOU NEED TWO UNI DRIVER POWER SUPPLIES, ONE FOR 2000K/2700K AND ONE FOR 4000K/6500K (SEE PAGES BELOW)		DMX POWER AND CDMX CONTROLLER: YOU NEED ONE POWER SUPPLY ONLY (SEE PAGES BELOW)	WITH TWO DIMMERS: YOU NEED TWO UNI DRIVER POWER SUPPLIES, ONE FOR 2000K/2700K AND ONE FOR 4000K/6500K (SEE PAGES BELOW)		DMX POWER AND CDMX CONTROLLER: YOU NEED ONE POWER SUPPLY ONLY (SEE PAGES BELOW)
ORDERING CODE (NOMINAL SIZE)	ACTUAL LENGTH	TUNABLE @ 5 WATTS PER FT	POWER SUPPLY	POWER SUPPLY	TUNABLE @ 10 WATTS PER FT	POWER SUPPLY	POWER SUPPLY
36	37.1	15	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	30	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
39	39.5	16	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	32	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
41	41.9	17	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	34	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
44	44.3	18	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	37	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
46	46.7	19	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	38	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
48	49.1	20	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	40	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
51	51.5	21	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	42	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
53	53.9	22	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	44	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
56	56.3	23	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	47	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
58	58.7	24	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	48	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
60	61.1	25	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	50	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
63	63.5	26	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	52	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
65	65.9	27	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	54	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
68	68.3	28	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	57	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
70	70.7	29	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	58	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
72	73.1	30	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	60	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
75	75.5	31	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	62	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
77	77.9	32	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	64	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
80	80.3	33	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	67	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
82	82.7	34	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	68	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
84*	85.1	35	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	70	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
87	87.5	36	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	72	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
89	89.9	37	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	74	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
92	92.3	38	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	77	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
94	94.7	39	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	78	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
96	97.1	40	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	80	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
99	99.5	41	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	82	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
101	101.9	42	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	84	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
104	104.3	43	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	87	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
106	106.7	44	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	88	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
108	109.1	45	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	90	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
111	111.5	46	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	92	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
113	113.9	47	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	94	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
116	116.3	48	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	97	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
118	118.7	49	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	98	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
120**	121.1	50	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	100	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK


*Maximum Chrome Length **Maximum Shipping Length

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED

DRAWINGS Dimension drawings for Cirrus Suspension T1

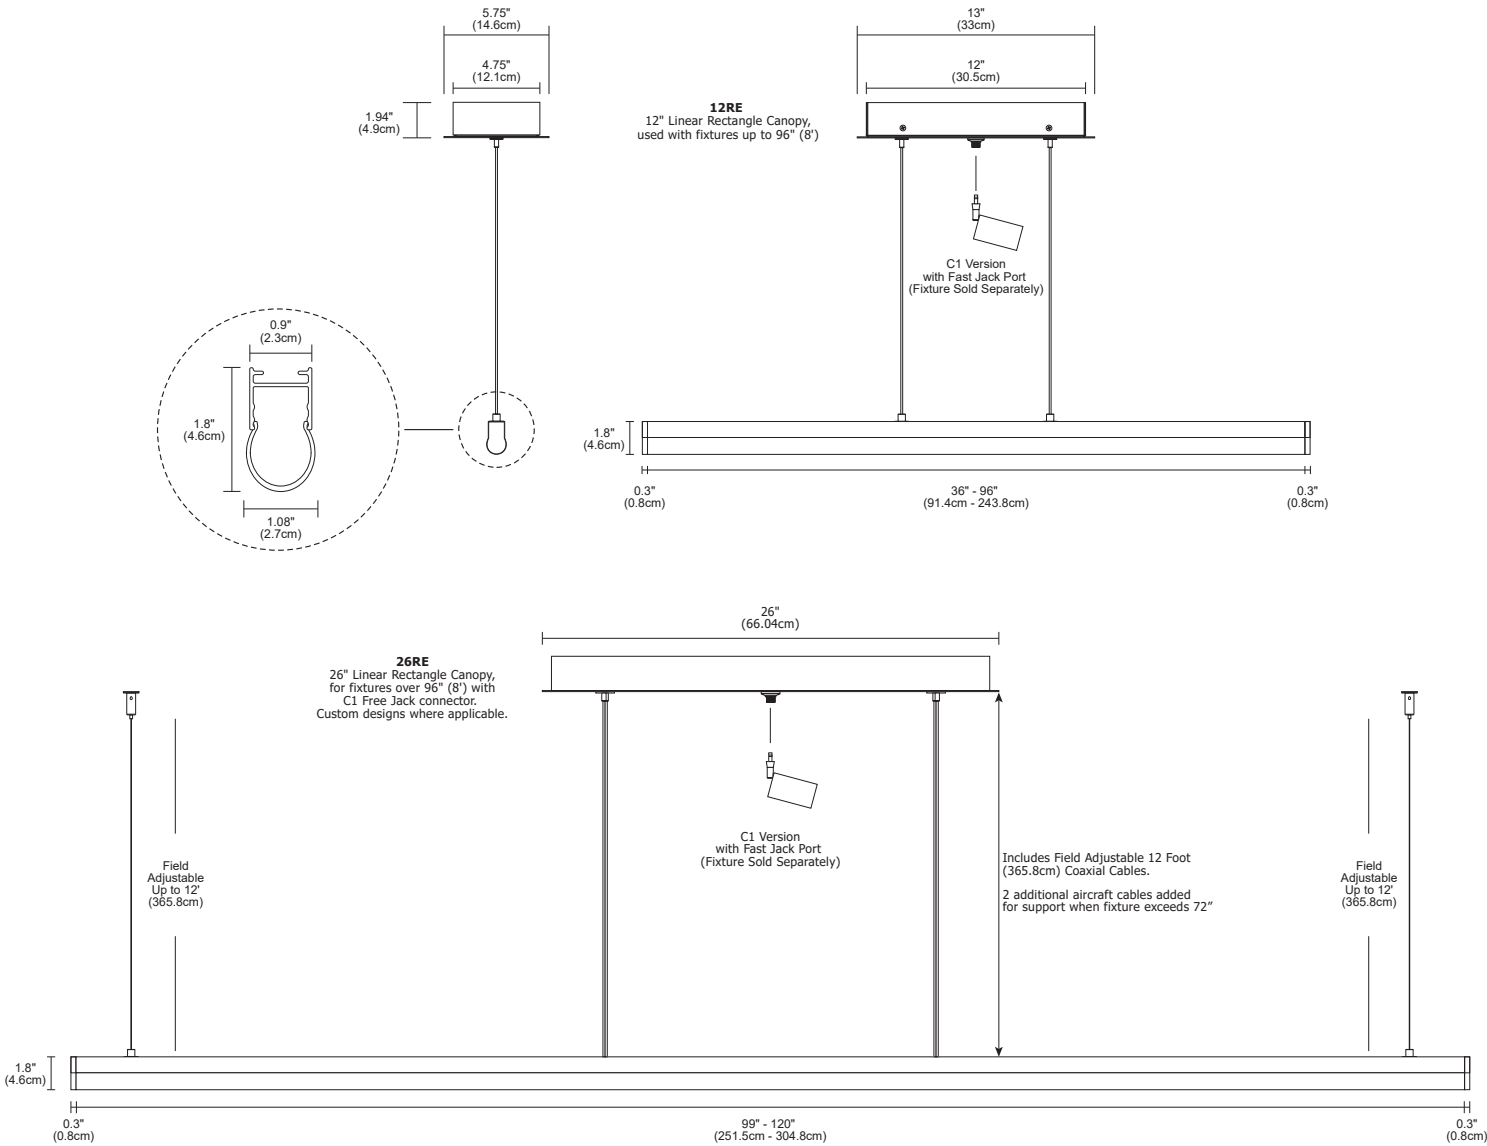

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED


WIRING DIAGRAM Wiring Diagram for Tunable White

APPLICATION


ELV dimming for Cirrus T1 Power Suspension, Center Feed Canopy, Tunable White 2000K-4000K

DIMMING


Dimmable with 0-10 dimmer: Philips: Sunrise SR1200ZTUNV; Lutron: Diva DDTV-WH, Nova-T NTSTV-DV-XX, Graftix Eye QS QSGRJ-XP, Radio RA2 RRD-1-ND; Leviton: LEV40050, IP710-LFZ; Legrand ADPD4FBL3P2W4

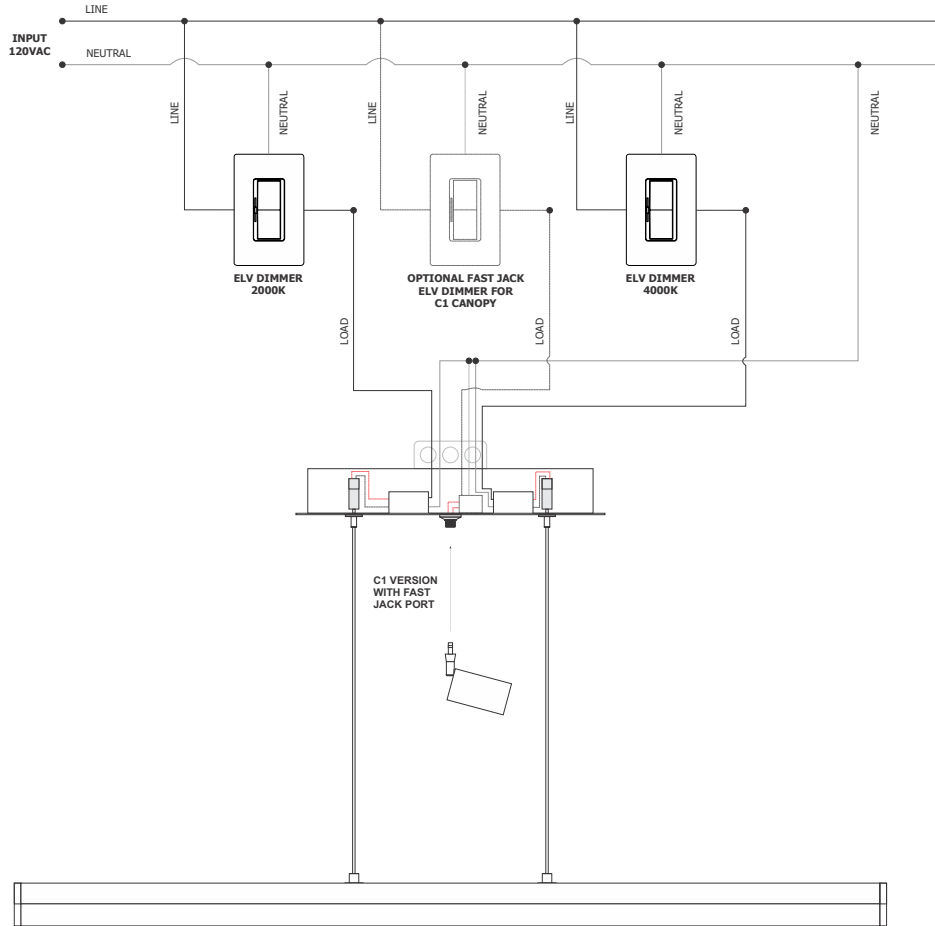

FJ-PST-NF-1-30K-SN
Satin Nickel

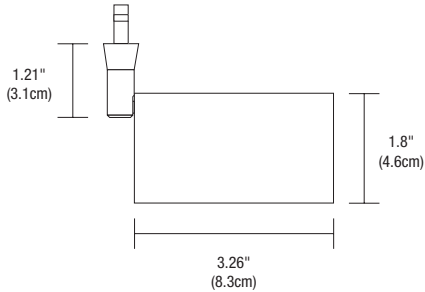

FJ-REB-1-SN
Satin Nickel

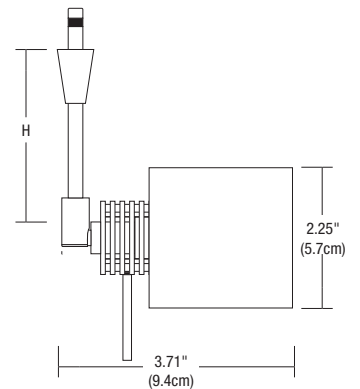

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

UNI INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES

24VDC UNIVERSAL DIMMING WITH ELV, 0-10V, TRIAC | DYNAMIC TUNABLE WHITE TECHNOLOGY

UNIVERSAL POWER SUPPLIES & COMPATIBLE DIMMERS[†]


ORDERING CODE	PSB-2X40W-UNI-24VDC	PSB-2X60W-UNI-24VDC	PSB-2X96W-UNI-24VDC	PSB-4X96W-UNI-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	2X40W	2X60W	2X96W	4X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"	17" X 13" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-2X40W-UNI-24VDC-IW	PSB-2X60W-UNI-24VDC-IW	PSB-2X96W-UNI-24VDC-IW	NA
ELV DIMMING & CONTROLS				
LUTRON DIVA: DVELV-300P	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	•
0-10 DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTW-WH, DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIK EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•
TRIAC DIMMING & CONTROLS				
LUTRON SKYLARK: S2-L-WH	•	•	•	•
LUTRON DVLV-600P-WH	•	•	•	•
LUTRON DVLV-603P-WH	•	•	•	•
LUTRON MALV-600-WH	•	•	•	•
LUTRON MALV-1000-WH	•	•	•	•
LUTRON MA-R-XX	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90


- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
 - Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supply's used for LED lighting
 - 0-10 Dimmer: Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

MAXIMUM LENGTH

POWER SUPPLY	5 WATTS	10 WATTS
PSB-2X40W-UNI-24VDC	8 FEET	4 FEET
PSB-2X60W-UNI-24VDC	12 FEET	6 FEET
PSB-2X96W-UNI-24VDC	20 FEET	10 FEET

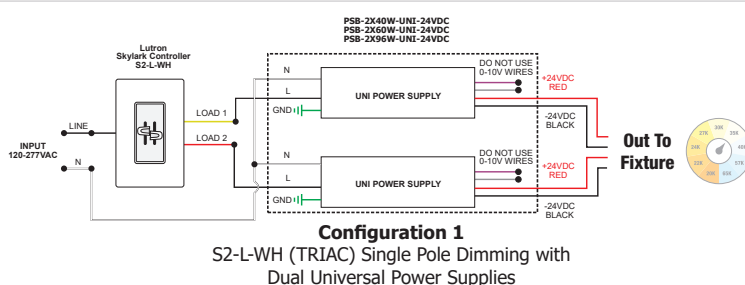

IN WALL MOUNTING OPTIONS

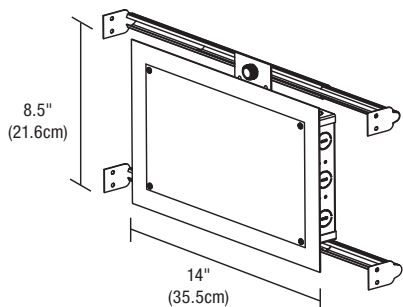

In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.


Ordering Codes 8.5 x 14.25 inch: PSB-2X40W-UNI-24VDC-IW, PSB-2X60W-UNI-24VDC-IW, PSB-2X96W-UNI-24VDC-IW

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

DYNAMIC/TUNABLE WHITE CONTROLLER AND POWER SUPPLIES

24VDC INDOOR CONSTANT VOLTAGE POWER SUPPLIES WITH DMX DRIVERS

REV 12.23.20

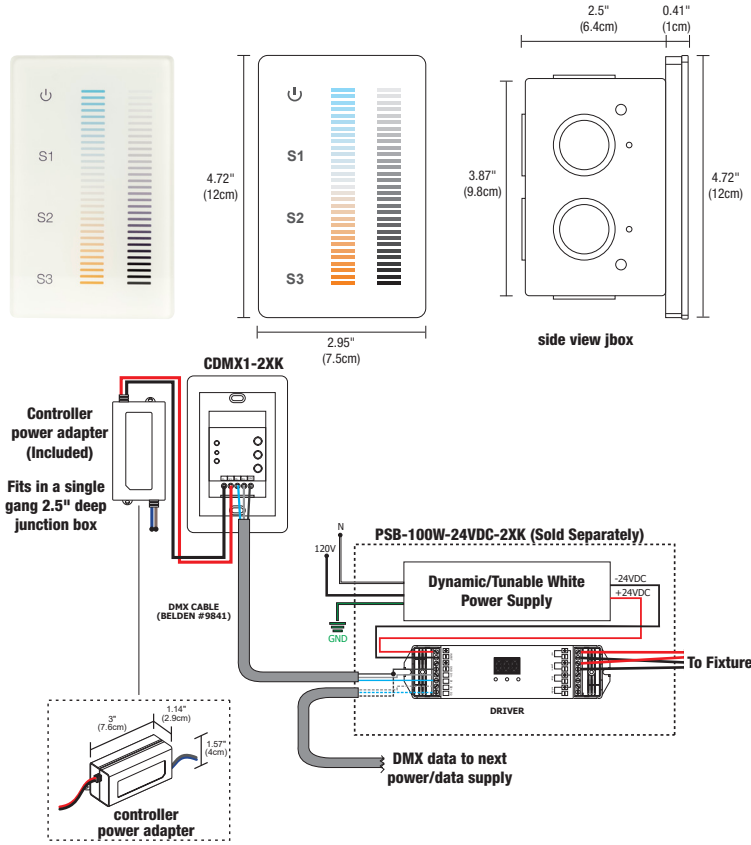

DESCRIPTION:

The Dynamic/Tunable White (**2K4K or 27K6**) Touch Controller offers fast and accurate Color Temperature adjustment and the ability to regulate the Brightness Independently. The modern Glass faceplate features illuminated indicators, and a back-lit night light that softly illuminates the controller when powered off. Designed for Dynamic/Tunable White, and dual-color LED installations within a single zone. The two Vertical Touch sliders are precise and sensitive, allowing you to fine-tune your perfect Color Temperature at any point between **2000K** (Sunset) to **4000K** (Cool White) or from **2700K** (Incandescent White) to **6500K** (Daylight White) while selecting over 250 levels of Brightness in a smooth, uninterrupted transition. Create Thousands of Dynamic White Color Combinations while maintaining even Brightness and overall saturation. Easily save three pre-set scenes for different times of the day. Support health, performance, and general well-being using Human-Centric lighting by fine-tuning the biological effects that light has on the circadian cycle using the latest in LED technology. Includes a power adapter that fits behind the controller within a standard junction box and fits inside a standard single-gang receptacle (not for use in a multi-gang box). Use with an insulated, 24 AWG stranded, tinned copper wire (Belden #9841). Power Supplies are Sold Separately. Includes a 5 year pro-rated warranty.

APPLICATIONS:

Indoor

OUTPUT SIGNAL:

USITT DMX 512 (1990)

INSTALLATION:

Fits in a single gang 2.5 inch deep junction box. Not compatible with multi-gang boxes.

LABELS:

ROHS, FCC, Damp Location, ETL/UL

POWER INPUT:

120-240VAC

Product	Type	Finish
CDMX1	2XK	WH
CDMX1 DMX Single Zone Touch Controller	2XK Tunable White	WH White


DYNAMIC COLOR CHANGING (DMX) POWER SUPPLIES & RECOMMENDED CONTROLLERS*

ORDERING CODE	PSB-100W-24VDC-2XK	PSB-2X100W-24VDC-2XK	PSB-3X100W-24VDC-2XK	PSB-4X100W-24VDC-2XK
				
SPECIFICATIONS				
MAXIMUM LOAD OF LED STRIP LENGTH	100W 5 WATTS - 20FT MAX. 10 WATTS - 10FT MAX.	2X100W 5 WATTS 2 X 20FT MAX. 10 WATTS - 2 X 10FT MAX.	3X100W 5 WATTS 3 X 20FT MAX. 10 WATTS - 3 X 10FT MAX.	4X100W 5 WATTS 4 X 20FT MAX. 10 WATTS - 4 X 10FT MAX.
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 6.48" X 2.18"	14" X 10" X 3"	17" X 10" X 3"	17" X 10" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-100W-24VDC-2XK-IW	NA	NA	NA
DMX DYNAMIC/TUNABLE WHITE DIMMING & CONTROLS				
TUNABLE WHITE TOUCH CONTROLLER (CDMX1-2XK)	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements

- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90

IN WALL MOUNTING OPTIONS



8.5 x 14 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes: PSB-100W-24VDC-2XK-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES

24VDC, LUTRON ECOSYSTEM


REV 12.23.20

Dynamic/Tunable White uses one or two power supplies, dependent on the controller or dimmer(s) used. Lutron Hi-Lume® can be used in both single or dual power formats, dependent on the controller or dimmer(s).


LUTRON HI-LUME® PREMIER .1% ECOSYSTEM®†			
ORDERING CODES	L3D0-96W24V-U 	2-WIRE ECOSYSTEM LTEA4U1UKL-CV240 	3-WIRE ECOSYSTEM L3DA4U1UKL-CV240 
SPECIFICATIONS			
MAXIMUM LOAD	96W	5W-40W	5W-40W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	10.5" X 5.5" X 2"	4" X 4.89" X 2.62"	4" X 4.89" X 2.62"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
DIMMING AND CONTROLS			
RADIO RA2	•	•	•
HOMEWORKS QS	•	•	•
PHPM-3F-120	•	•	•
PHPM-3F-DV	•	•	•
BCI-0-10	•	•	•

*Tunable White Color Temperature is compatible with 0-10V, ELV, DMX, and Lutron Hi-Lume® Power Supplies.


WIRING DIAGRAM: DMX Control with Lutron Grafik Eye Control Unit

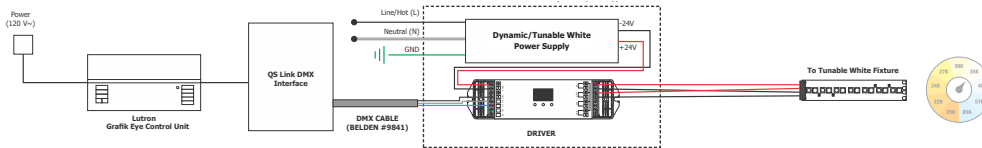


WIRING DIAGRAM: Line Voltage Dimming with Lutron Grafik Eye Control Unit

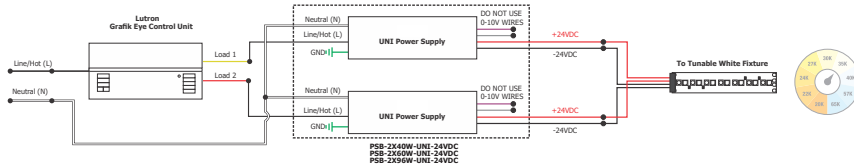


WIRING DIAGRAM: 0-10V Dimming with Lutron Grafik Eye Control Unit or Wall box controller

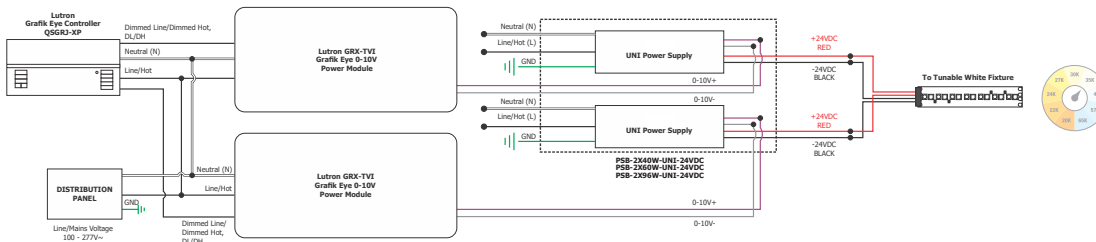

WIRING DIAGRAM: 2-Wire EcoSystem Panel

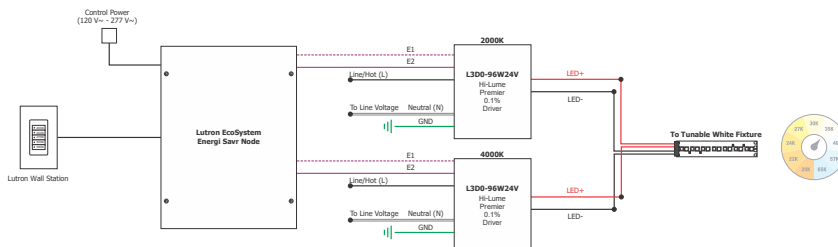

WIRING DIAGRAM: 3-Wire EcoSystem Wall Box

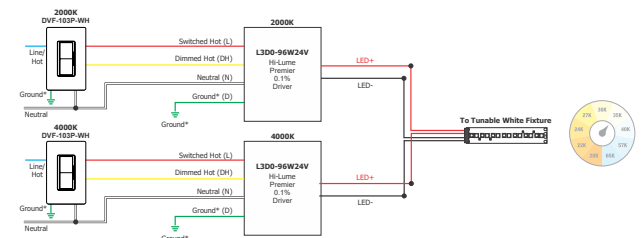


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


SUSPENSION TM30 DATA
TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9
Color Vector Graphic

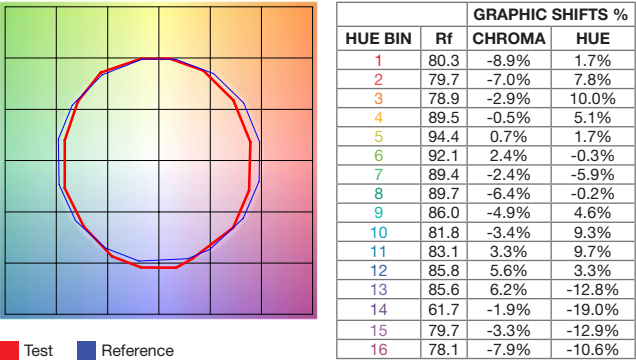

3000K (2K4K) | Rf: 90.2 | Rg: 101.4
Color Vector Graphic

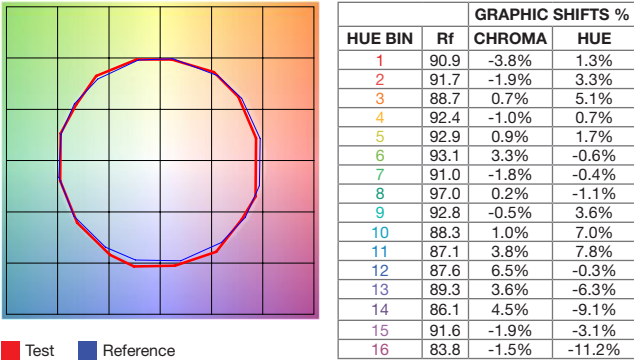

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1
Color Vector Graphic

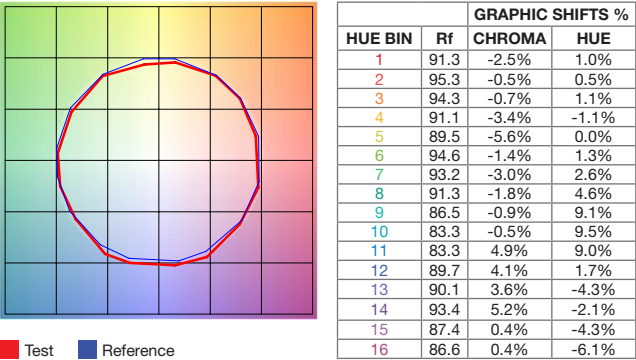


Table with 4 columns: PROJECT, FIXTURE TYPE, DATE, and an empty column.

CIRRUS SUSPENSION T1

TUBULAR T1 DYNAMIC/TUNABLE WHITE DOWNLIGHT, CENTER FEED



FJ-SCO-1-PN
 Fast Jack Scope LED
 9W, 315 lumens 3000K
 (adjustable beam spread
 from 20°-50°)
 Fixture Finishes: SN, PN, BZ, WH



FJ-PST-SP-1-30K-SN
 Fast Jack Piston
 9W, 650 lumens
 SP 15°, NF 25°, FL 35°
 & WF 45° Beam Spreads
 Fixture Finishes: SN, WH



FJ-FOR-SQ-3-PN
FJ-FOR-RD-3-PN
 Fast Jack Form Round or Square
 Fixture Finishes: SN, PN



FJ-FOR-2RD-3-SN
FJ-FOR-2SQ-3-SN
 Fast Jack Form
 Round or Square 2-Head
 Fixture Finishes: SN, PN



FJ-REB-1-PN
 Fast Jack Rebel
 Fixture Finishes: SN, PN, BZ, WH



FJ-SPI-3-PN with S1-PN
 Fast Jack Spirit, S1 Shade
 Fixture Finishes: SN, PN, BZ
 S1 Shade Finishes: SN, PN, BZ, BK

FAST JACK FIXTURE & SHADE FINISHES									
SN	Satin Nickel	PN	Polished Nickel	BZ	Antique Bronze	WH	White	BK	Black

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

12VAC LED MR16

REV 12.23.20

SOL LIGHT WARM DIM

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	MR16-12V-8W-NF-27KWD-SL	8	97+	85	24	30,000	2700K dims to 1800K	390	50	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-27KWD-SL	8	97+	85	36	30,000	2700K dims to 1800K	427	55	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-NF-30KWD-SL	8	97+	85	24	30,000	3000K dims to 1800K	410	53	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-30KWD-SL	8	97+	85	36	30,000	3000K dims to 1800K	450	58	12V	Title 24 Compliant, low flicker <1% CE, UL, NOM	50

SORAA BRILLIANT HIGH LUMEN 2700K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-827-H1*	8	90	80	10	35,000	8,000	575	77	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-827-H1	8	90	80	25	35,000	3,710	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-827-H1	8	90	80	36	35,000	1,550	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

*Use with Snap Lens

SORAA VIVID 2700K COLOR TEMPERATURE INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10d-927-03*	8	95	95	10	35,000	5,710	390	52	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-927-03	8	95	95	25	35,000	2,260	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-927-03	8	95	95	36	35,000	1,070	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SORAA HEALTHY

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SH-MR16-07-36D-27-01-X2	8	80	90	36	25,000	1,020	400	53	12V +/- 1.2V	UL/CUL, FCC Title 47 Part 15B, RoHS	50

SORAA BRILLIANT HIGH LUMEN 3000K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-830-H1*	8	90	80	10	35,000	8,400	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-830-H1	8	90	80	25	35,000	3,300	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-830-H1	8	90	80	36	35,000	1,650	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

*Use with Snap Lens

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

12VAC LED MR16

REV 12.23.20

SORAA VIVID 3000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-930-03*	8	95	95	10	35,000	6,000	410	55	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-930-03	8	95	95	25	35,000	2,400	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-930-03	8	95	95	36	35,000	1,130	435	58	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SORAA VIVID 4000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-940-03*	8	95	95	10	35,000	6,290	430	57	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-940-03	8	95	95	25	35,000	2,510	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-940-03	8	95	95	36	35,000	1,190	455	61	12V +/- 1.2V	JA8-2016-E, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SATCO 3500K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	S8637	8	90+	N/A	15	25,000	6,290	430	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75
	S8642	8	90+	N/A	40	25,000	2,510	455	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75


8MR16/LED/40°/35K/90CRI/12V 8 watt; LED MR16; 3500K; 40° beam spread; GU5.3 base; 12 volts. Features: Silver back MR16 reflector. Direct replacements for 75 watt Halogen lamps - uses only 8 watts. Dimmable. No UV or IR radiation. Approved for enclosed fixtures.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SORAA VIVID MR16 36° FL

3000K | Rf: 90.4 | Rg: 99.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	94.4	1.0%	0.8%
2	94.6	2.1%	-1.1%
3	91.9	1.1%	-3.3%
4	91.9	2.1%	-2.1%
5	93.9	0.4%	-0.9%
6	95.2	0%	1.9%
7	93.4	2.7%	-0.7%
8	92.7	4.2%	0.1%
9	90.5	3.6%	-3.9%
10	84.3	2.3%	-9.2%
11	81.3	2.3%	-12.7%
12	81.3	-3.6%	-10.3%
13	90.5	-2.5%	-6.2%
14	88.5	-8.2%	-0.4%
15	96.2	-1.0%	0.3%
16	86.6	-5.4%	8.2%

SOL-LIGHT WARM DIM MR16 36° FL

3000K | Rf: 94.2 | Rg: 101.2

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	96.0	0.3%	0.7%
2	96.8	0.9%	-0.8%
3	95.6	0.5%	-0.8%
4	93.1	-3.2%	-2.7%
5	95.7	-2.4%	0.4%
6	96.8	0.4%	1.6%
7	92.4	-1.4%	3.5%
8	96.8	1.2%	1.2%
9	94.0	1.4%	3.1%
10	92.6	2.1%	3.9%
11	92.2	3.7%	3.9%
12	92.4	3.9%	-0.9%
13	94.7	0.9%	-3.3%
14	93.4	3.0%	-3.2%
15	93.6	-1.1%	0.9%
16	90.2	2.4%	-6.7%

SORAA VIVID MR16 25° NFL

3000K | Rf: 94.0 | Rg: 101.0

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%

SOL-LIGHT WARM DIM MR16 24° NFL

3000K | Rf: 94.2 | Rg: 101.2

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%