

CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 12.11.20



DESCRIPTION

With the combination of clean, linear channels that create a geometric shape, the Cirrus MIYO (Make-It-Your-Own) Square LED Suspension with Remote Power Supply is as minimalist as it is futuristic in design. The linear channel is available in 5 or 7 watts per foot with up to 10824 total lumens at 95+ CRI, and features a diffused flat lens with a 100° beam spread. Personalize your Light fixture with 5 finishes to choose from, lengths from 11" to 120" square, and 11 LED color temperatures including Warm Dim and Tunable White. An optional white or black louver is available to help reduce glare. Non-Lit Corners allow Cirrus to ship disassembled, but quickly assembled on site, allowing for large sized fixtures. Remote power allows for higher wattage power supplies to be easily accessed. All these options allow you to become the fixture designer for your unique space. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com

FINISHES



System	Type	Wattage Per Foot	Canopy	Nominal Size (in)	Color Temperature	Finish
CSDS	SQ	5W	C	11	22K	SN
CSDS Cirrus MIYO Diffused Lens, Remote Power CSDH Cirrus MIYO Diffused Lens, High Efficiency, Remote Power CSDW Cirrus MIYO Diffused Lens with White Louver, Remote Power CSDB Cirrus MIYO Diffused Lens with Black Louver, Remote Power	SQ Square	5W 4.4 watt (116" Max Warm Dim) 7W 7.3 watt (81" Max Length)	C Center Feed E End Feed	11" to 120" square for 5 watts per foot 11" to 81" square for 7 watts per foot 84" Max Length Chrome 116" Max Warm Dim	22K 2200K Amber White 24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim (5W only) 30K 3000K Warm White 30D 3000K Warm Dim (5W only) 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White 2K4K Tunable White 2000K-4000K (5W only) 27K6 Tunable White 2700K-6500K (5W only)	SN Satin Nickel BK Satin Black WH White CH Chrome BB Satin Brass with Black Canopy BW Satin Brass with White Canopy

LENSES

- Diffused White Standard or High Efficiency Lens with 100° beam spread
- Optional black or white louver

APPLICATIONS

Designed for indoor use only. Ideal environments include: conference rooms, kitchens, dining rooms, architectural lighting, general lighting, and retail

LAMP

- Choose from 10 color temperatures from 2200K-5700K including Warm Dim and Tunable White
- Warm Dim (optional): 2700K to 2000K (**27D**) or 3000K to 2000K (**30D**)
- Tunable White: 2000K-4000K or 2700K-6500K
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLY (ORDER SEPARATELY)*

- 120V input, 24VDC Class 2 output; electronic low voltage LED power supply
 - Universal Power Supply, Triac, ELV and 0-10 flicker free dimming, Title 24
- *In-Wall Mounting Kits available for select power supplies

DIMMERS AND CONTROLS (SOLD SEPARATELY)


- Electronic Low Voltage Dimming (**ELV**): 100 Watt Class 2
- 0-10 Volt Dimming (**0-10V**)
- Lutron Hi-Lume®

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY


Finishes: Finishes available for the Cirrus MIYO Square LED Suspension with Remote Power

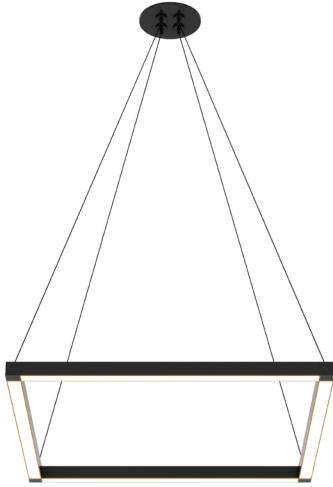


CSDS-SQ-5W-C-31-30K-BK



CSDS-SQ-5W-C-31-30K-CH

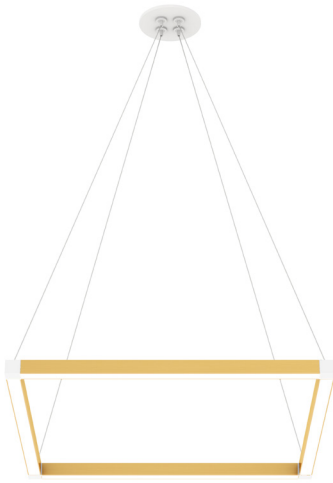

CSDS-SQ-5W-C-31-30K-BW

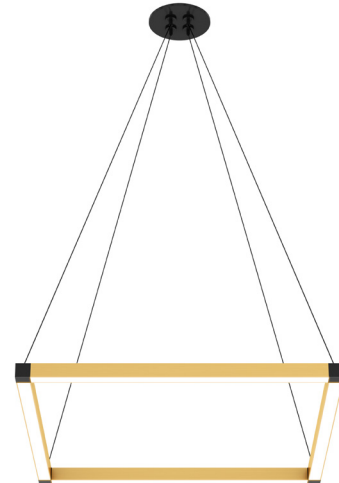

CSDS-SQ-5W-C-31-30K-BB



CSDS-SQ-5W-C-31-30K-SN



CSDS-SQ-5W-C-31-30K-WH

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY

LAMP DATA Lamp Data for Downlight Channel


CSDS																														
DESCRIPTION	STANDARD EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER														TUNABLE WHITE 2K4K						TUNABLE WHITE 27K6									
	5W (4.4 watts)							7W (7.3 watts)							5W (4.4 watts)						5W (4.4 watts)									
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	20K	22K	24K	27K	30K	35K	40K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	226	251	275	341	301	341	345	375	399	369	409	450	492	563	612	652	223	234	246	257	281	292	304	279	287	295	304	292	289	280
LUMENS PER WATT (lm/w)	51	57	62	71	68	71	78	85	90	51	56	62	68	77	84	89	56	51	53	56	61	64	76	70	72	72	71	71	72	71
CRI	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	83+	83+	92+	92+	92+	94+	94+	93+	93+	94+	94+	94+	93+	93+

CSDH																														
DESCRIPTION	HIGH EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER														TUNABLE WHITE 2K4K						TUNABLE WHITE 27K6									
	5W (4.4 watts)							7W (7.3 watts)							5W (4.4 watts)						5W (4.4 watts)									
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	20K	22K	24K	27K	30K	35K	40K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	271	301	330	409	361	409	413	450	478	443	491	540	590	676	735	782	267	281	295	309	337	351	364	334	344	354	365	351	347	336
LUMENS PER WATT (lm/w)	62	68	75	85	82	85	94	102	108	61	67	74	81	93	100	107	67	61	64	67	73	76	91	84	86	86	85	85	87	85
CRI	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	83+	83+	92+	92+	92+	94+	94+	93+	93+	94+	94+	94+	93+	93+

CSDW																														
DESCRIPTION	100° DIFFUSED WHITE LENS WITH WHITE LOUVER														TUNABLE WHITE 2K4K						TUNABLE WHITE 27K6									
	5W (4.4 watts)							7W (7.3 watts)							5W (4.4 watts)						5W (4.4 watts)									
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	20K	22K	24K	27K	30K	35K	40K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	178	198	217	269	237	269	272	296	314	291	323	355	388	444	483	514	176	185	194	203	222	231	239	220	226	233	240	231	228	221
LUMENS PER WATT (lm/w)	40	45	49	56	54	56	62	67	71	40	44	49	53	61	66	70	44	40	42	44	48	50	60	55	57	57	56	56	57	56
CRI	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	83+	83+	92+	92+	92+	94+	94+	93+	93+	94+	94+	94+	93+	93+







CSDB																														
DESCRIPTION	100° DIFFUSED WHITE LENS WITH BLACK LOUVER														TUNABLE WHITE 2K4K						TUNABLE WHITE 27K6									
	5W (4.4 watts)							7W (7.3 watts)							5W (4.4 watts)						5W (4.4 watts)									
WATTS PER FOOT																														
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	20K	22K	24K	27K	30K	35K	40K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	139	155	170	210	185	210	212	231	246	227	252	278	303	347	378	402	137	144	152	159	173	180	187	172	177	182	187	180	178	172
LUMENS PER WATT (lm/w)	32	35	38	44	42	44	48	52	56	31	35	38	42	48	52	55	34	31	33	34	38	39	47	43	44	44	44	44	45	44
CRI	85+	90+	95+	93+	95+	92+	85+	85+	85+	85+	90+	95+	95+	85+	85+	85+	83+	83+	92+	92+	92+	94+	94+	93+	93+	94+	94+	94+	93+	93+

*27D, 30D - Warm Dim (4.8 Watts)

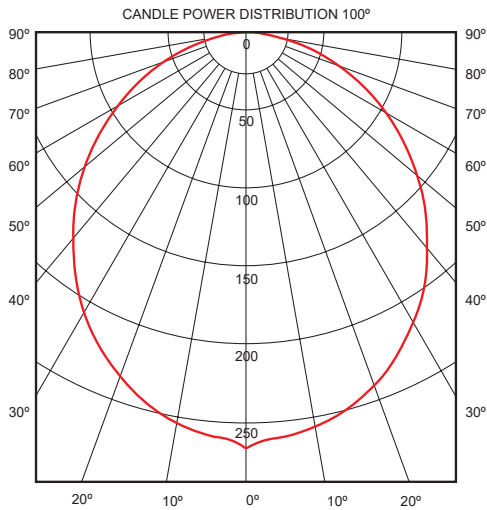

5 Watt 100°	
Distance	Foot Candles
1'	122
1.5'	80
2'	59
3'	38
4'	27
5'	20
6'	15
7'	12
8'	10

7 Watt 100°	
Distance	Foot Candles
1'	200
1.5'	131
2'	96
3'	62
4'	45
5'	33
6'	26
7'	21
8'	18

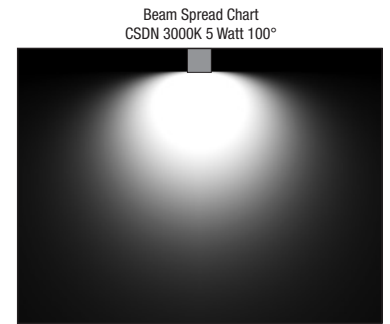

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY



REV 12.11.20

Length Chart: Actual lengths for Cirrus MIYO Square LED Suspension with Remote Power

22K, 24K, 27K, 30K, 35K, 40K, 57K & TUNABLE WHITE									
Nominal Length (Inches)	Dim A & B (Inches)	Total Wattage (5W)	Total Lumens 3000K (5W)	Total Lumens White Louver (5W)	Total Lumens Black Louver (5W)	Total Wattage (7W)	Total Lumens 3000K (7W)	Total Lumens White Louver (7W)	Total Lumens Black Louver (7W)
12	11.75	16	835	826	531	24	1312	1296	835
14	14.15	20	1044	1032	664	30	1640	1620	1044
17	16.55	24	1253	1238	797	36	1968	1944	1253
19	18.95	28	1462	1445	930	42	2296	2268	1462
21	21.35	32	1670	1651	1062	48	2624	2592	1670
24	23.75	36	1879	1858	1195	54	2952	2916	1879
26	26.15	40	2088	2064	1328	60	3280	3240	2088
29	28.55	44	2297	2270	1461	66	3608	3564	2297
31	30.95	48	2506	2477	1594	72	3936	3888	2506
33	33.35	52	2714	2683	1726	78	4264	4212	2714
36	35.75	56	2923	2890	1859	84	4592	4536	2923
38	38.15	60	3132	3096	1992	90	4920	4860	3132
41	40.55	64	3341	3302	2125	96	5248	5184	3341
43	42.95	68	3550	3509	2258	102	5576	5508	3550
45	45.35	72	3758	3715	2390	108	5904	5832	3758
48	47.75	76	3967	3922	2523	114	6232	6156	3967
50	50.15	80	4176	4128	2656	120	6560	6480	4176
53	52.55	84	4385	4334	2789	126	6888	6804	4385
55	54.95	88	4594	4541	2922	132	7216	7128	4594
57	57.35	92	4802	4747	3054	138	7544	7452	4802
60	59.75	96	5011	4954	3187	144	7872	7776	5011
62	62.15	100	5220	5160	3320	150	8200	8100	5220
65	64.55	104	5429	5366	3453	156	8528	8424	5429
67	66.95	108	5638	5573	3586	162	8856	8748	5638
69	69.35	112	5846	5779	3718	168	9184	9072	5846
72	71.75	116	6055	5986	3851	174	9512	9396	6055
74	74.15	120	6264	6192	3984	180	9840	9720	6264
77	76.55	124	6473	6398	4117	186	10168	10044	6473
79	78.95	128	6682	6605	4250	192	10496	10368	6682
81 (Max 7 watt)	81.35	132	6890	6811	4382	198	10824	10692	6890
84*	83.75	136	7099	7018	4515				
86	86.15	140	7308	7224	4648				
89	88.55	144	7517	7430	4781				
91	90.95	148	7726	7637	4914				
93	93.35	152	7934	7843	5046				
96	95.75	156	8143	8050	5179				
98	98.15	160	8352	8256	5312				
101	100.55	164	8561	8462	5445				
103	102.95	168	8770	8669	5578				
105	105.35	172	8978	8875	5710				
108	107.75	176	9187	9082	5843				
110	110.15	180	9396	9288	5976				
113	112.55	184	9605	9494	6109				
115	114.95	188	9814	9701	6242				
117	117.35	192	10022	9907	6374				
120**	119.75	196	10231	10114	6507				

*Maximum Chrome Length **Maximum Shipping Length

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY

Length Chart: Actual lengths for Cirrus MIYO Square LED Suspension with Remote Power


WARM DIM (27D & 30D)					
Nominal Length (Inches)	Dim A & B (Inches)	Total Wattage (5W)	Total Lumens 3000K (5W)	Total Lumens White Louver (5W)	Total Lumens Black Louver (5W)
11	11.15	15	777	714	456
14	14.15	20	1036	952	608
17	17.15	25	1295	1190	760
20	20.15	30	1554	1428	912
23	23.15	35	1813	1666	1064
26	26.15	40	2072	1904	1216
29	29.15	45	2331	2142	1368
32	32.15	50	2590	2380	1520
35	35.15	55	2849	2618	1672
38	38.15	60	3108	2856	1824
41	41.15	65	3367	3094	1976
44	44.15	70	3626	3332	2128
47	47.15	75	3885	3570	2280
50	50.15	80	4144	3808	2432
53	53.15	85	4403	4046	2584
56	56.15	90	4662	4284	2736
59	59.15	95	4921	4522	2888
62	62.15	100	5180	4760	3040
65	65.15	105	5439	4998	3192
68	68.15	110	5698	5236	3344
71	71.15	115	5957	5474	3496
74	74.15	120	6216	5712	3648
77	77.15	125	6475	5950	3800
80	80.15	130	6734	6188	3952
83	83.15	135	6993	6426	4104
86	86.15	140	7252	6664	4256
89	89.15	145	7511	6902	4408
92	92.15	150	7770	7140	4560
95	95.15	155	8029	7378	4712
98	98.15	160	8288	7616	4864
101	101.15	165	8547	7854	5016
104	104.15	170	8806	8092	5168
107	107.15	175	9065	8330	5320
110	110.15	180	9324	8568	5472
113	113.15	185	9583	8806	5624
116	116.15	190	9842	9044	5776

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


CIRRUS SUSPENSION MIYO SQUARE NON-LIT CORNERS

24VDC WITH REMOTE POWER SUPPLY



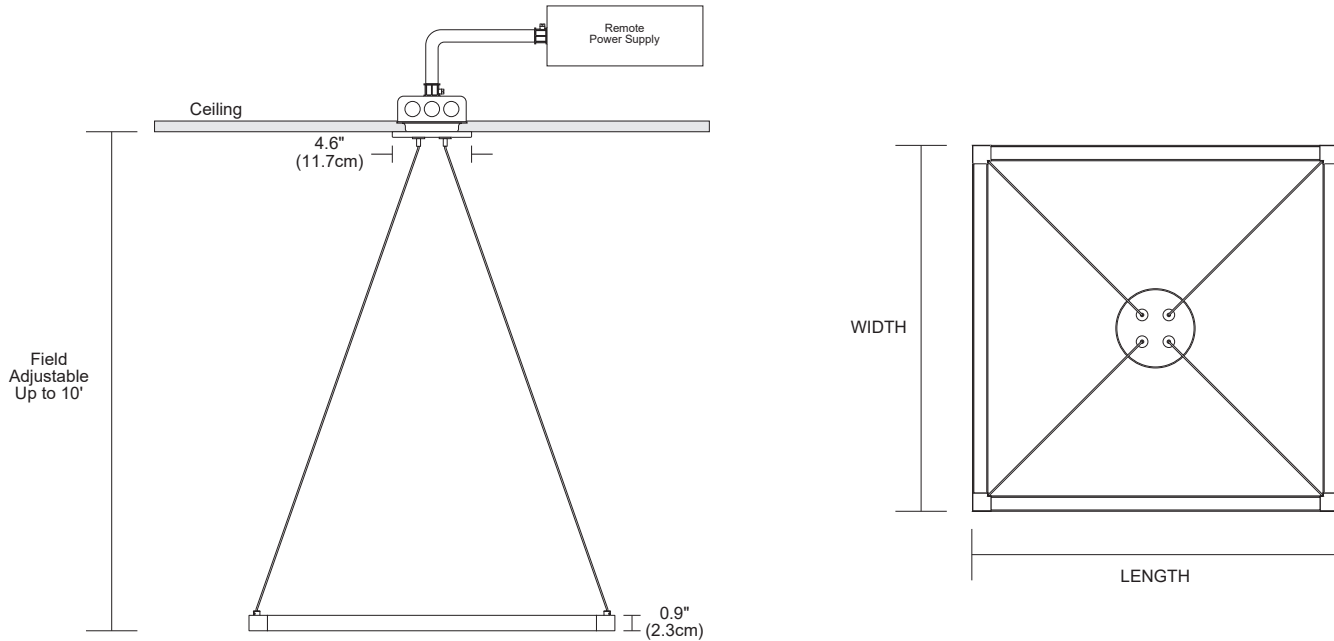

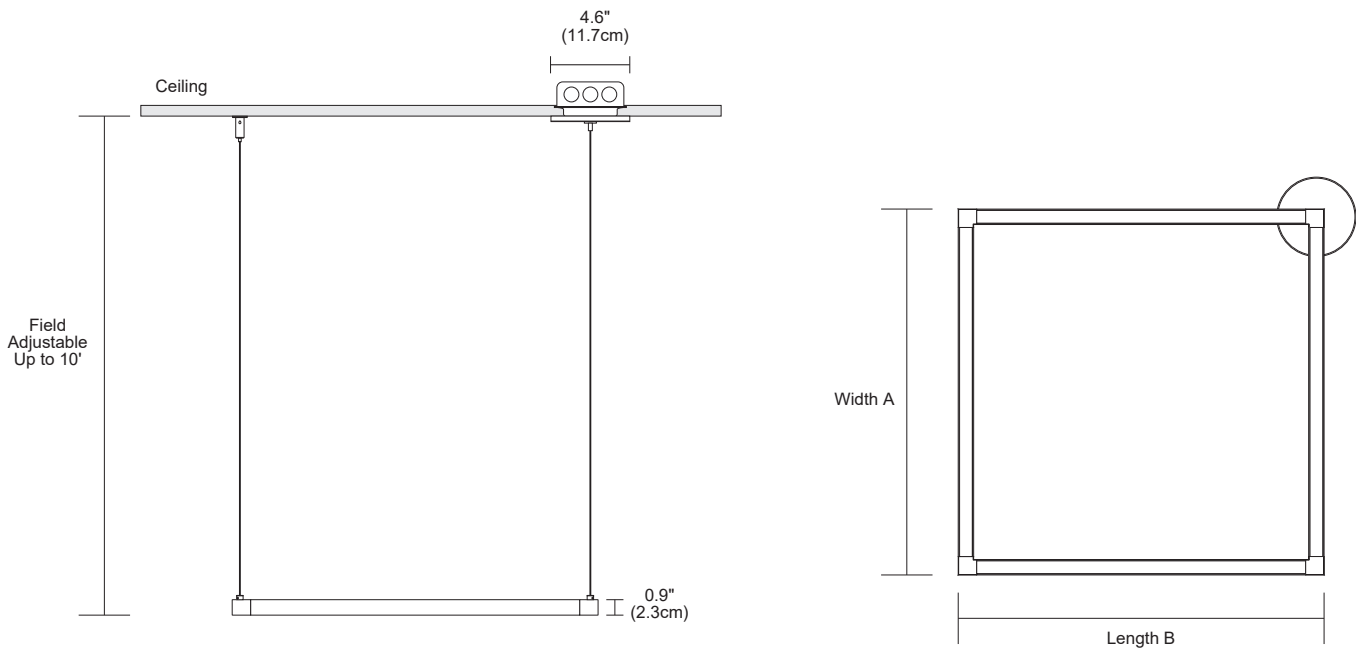


Drawings: Dimensions for the Cirrus MIYO Square LED Suspension fixture, Center Feed



Drawings: Dimensions for the Cirrus MIYO Square LED Suspension fixture, End Feed




PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

ELECTRONIC LOW-VOLTAGE (ELV) POWER SUPPLIES & RECOMMENDED DIMMERS ^{†‡}				
ORDERING CODES	PS-60L-ELV-24VDC 	PSB-60W-ELV-24VDC 	PSB-2X60W-ELV-24VDC 	PSB-100W-ELV-24VDC 
SPECIFICATIONS				
MAXIMUM LOAD	60W NON-IC, 50W-IC (FITS IN JBOX)	60W	2X60W	96W
INPUT VOLTAGE	120VAC	120VAC	120VAC	120VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	2.25" X 1.25" X 0.83"	8.125" X 2" X 1.75"	12.15" X 6.48" X 2.18"	9.25" X 3.5" X 2"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN WALL MOUNTING	N/A	PSB-60W-ELV-24VDC-IW	PSB-2X60W-ELV-24VDC-IW	PSB-100W-ELV-24VDC-IW
ELECTRONIC LOW-VOLTAGE (ELV) POWER SUPPLIES & RECOMMENDED DIMMERS ^{†‡}				
ORDERING CODES	PSB-2X100W-ELV-24VDC 	PSB-3X100W-ELV-24VDC 	PSB-4X100W-ELV-24VDC 	
SPECIFICATIONS				
MAXIMUM LOAD	2X96W	3X96W	4X96W	
INPUT VOLTAGE	120VAC	120VAC	120VAC	
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	
DIMENSIONS	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"	
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	
IN WALL MOUNTING	PSB-2X100W-ELV-24VDC-IW	N/A	N/A	
DIMMING AND CONTROLS				
LUTRON DIVA: DVELV-300P	•	•	•	
LUTRON SKYLARK: SELV-300P	•	•	•	
LUTRON RADIO RA2: RRD-6NA	•	•	•	
LUTRON MAESTRO: MAELV-600	•	•	•	
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	

[†]22K - 57K color temperatures are compatible with 0-10V, ELV, and Lutron Hi-Lume® Power Supplies. Warm Dim (27D, 30D) color temperatures are only compatible with ELV power supplies. Tunable White color temperature is compatible with 0-10V, ELV, DMX, and Lutron Hi-Lume® Power Supplies. Dynamic Color (RGB, RGB+W) and Static Color (Amber, Blue, Green, or Red) are compatible with DMX Power Supplies.


[‡]Electrical Panels using Seimens/Murray AFCI breakers are not compatible with this ELV transformer. Use 0-10 Volt power supplies with this breaker

With N-Lite Dimming Do not use ELV power supplies, use only 0-10 volt or Uni drivers power supplies



5.1 x 14.25 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes: PSB-60W-ELV-24VDC-IW
PSB-100W-ELV-24VDC-IW



8.5 x 14 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.


Ordering Codes: PSB-2X60W-ELV-24VDC-IW
PSB-2X100W-ELV-24VDC-IW

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SAMPLE WIRING DIAGRAMS 24VDC ELV


Application: ELV dimming for Static White

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

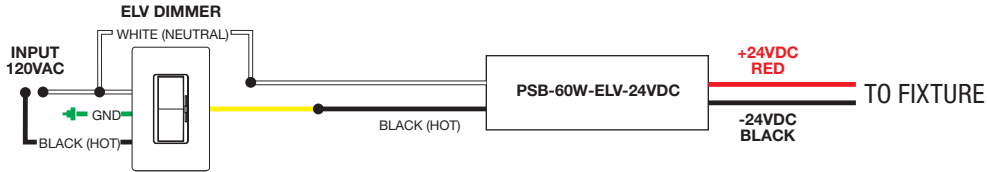


Application: ELV dimming for Static White

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

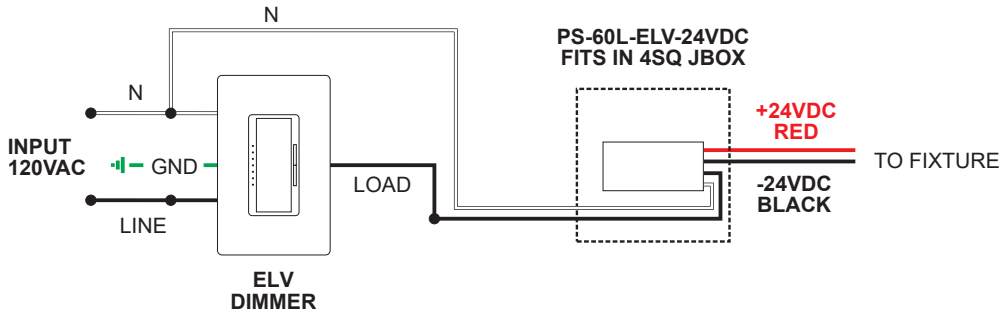

Application: Dual ELV dimming for Dynamic/Tunable White


Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

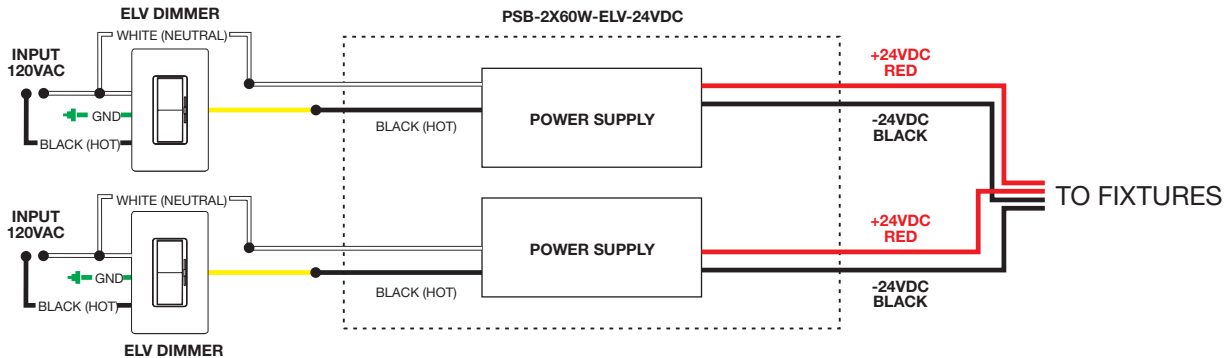

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


0-10 VOLT (010) POWER SUPPLIES & RECOMMENDED DIMMERS†				
ORDERING CODE	PSB-25W-010-24VDC 	PSB-60W-010-24VDC 	PSB-96W-010-24VDC 	PSB-2X96W-010-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	25W	60W	96W	2X96W
INPUT VOLTAGE	120VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-25W-010-24VDC-IW	PSB-60W-010-24VDC-IW	PSB-96W-010-24VDC-IW	PSB-2X96W-010-24VDC-IW

0-10 VOLT (010) POWER SUPPLIES & RECOMMENDED DIMMERS†			
ORDERING CODE	PSB-3X96W-010-24VDC 	PSB-4X96W-010-24VDC 	
SPECIFICATIONS			
MAXIMUM LOAD	3X96W	4X96W	
INPUT VOLTAGE	120-277VAC	120-277VAC	
OUTPUT VOLTAGE	24VDC	24VDC	
DIMENSIONS	14" X 10" X 3"	17" X 13" X 3"	
CLASSIFICATION	CLASS 2	CLASS 2	
IN-WALL MOUNTING	N/A	N/A	
DIMMING & CONTROLS			
PHILIPS SUNRISE: SR1200ZTUNV	•		•
LUTRON DIVA: DVTV-WH, DVSTV-WH	•		•
LUTRON NOVA T: NTSTV-DV-XX	•		•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•		•
LUTRON RADIO RA2: RRD-10ND	•		•
LEVITON: LEV40050	•		•
LEVITON IP710-LFZ	•		•
LEGRAND: ADPD4FBL3P2W4	•		•



5.1 x 14.25 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes: PSB-25W-010-24VDC-IW, PSB-60W-010-24VDC-IW, PSB-96W-010-24VDC-IW



8.5 x 14 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes: PSB-2X96W-010-24VDC-IW


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SAMPLE WIRING DIAGRAMS 24VDC 010

Application: 0-10V Dimming Applications For Static White and Warm Dim 0-10V Dual Dimming.


Dimming: Dimmable with 0-10V dimmers: Signify (Phillips) Sunrise: SR1200ZTUNV, Leviton Dimmers: LEV40050, IP710-LFZ, *IP710-DLZ *(Built in LED locator light) Legrand Dimmer: ADPD4FBL3P2W4 Lutron Systems: Lutron GRAFIX Eye QS Main Unit (with DRX-TVI) Radio Ra2 (with GRX-TVI)

0-10V DIMMER

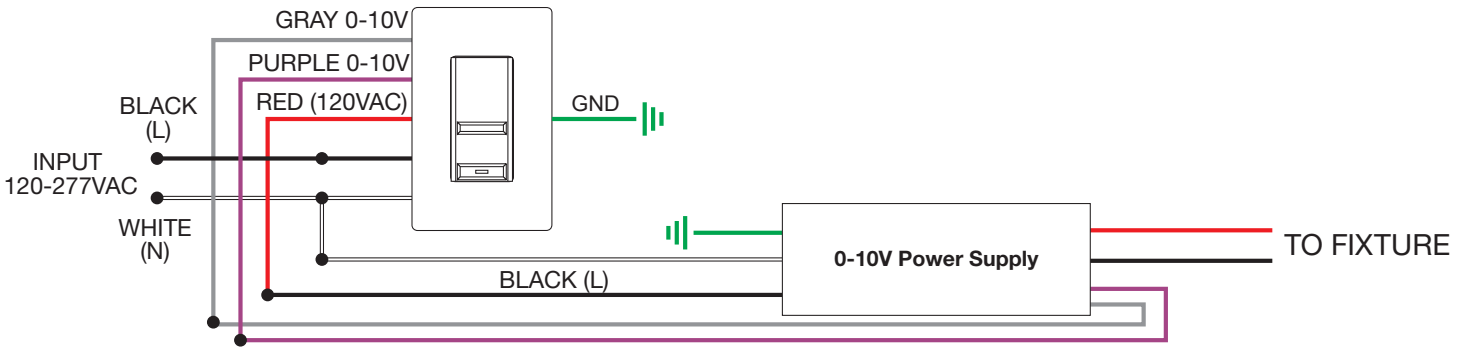

Application: Dual 0-10V dimming for Dynamic/Tunable White

Dimming: Dimmable with Dual 0-10V dimmers: Signify (Phillips) Sunrise: SR1200ZTUNV, Leviton Dimmers: LEV40050, IP710-LFZ, *IP710-DLZ *(Built in LED locator light), Legrand Dimmer: ADPD4FBL3P2W4, Lutron Systems: Lutron GRAFIX Eye QS Main Unit (with DRX-TVI) Radio Ra2 (with GRX-TVI)

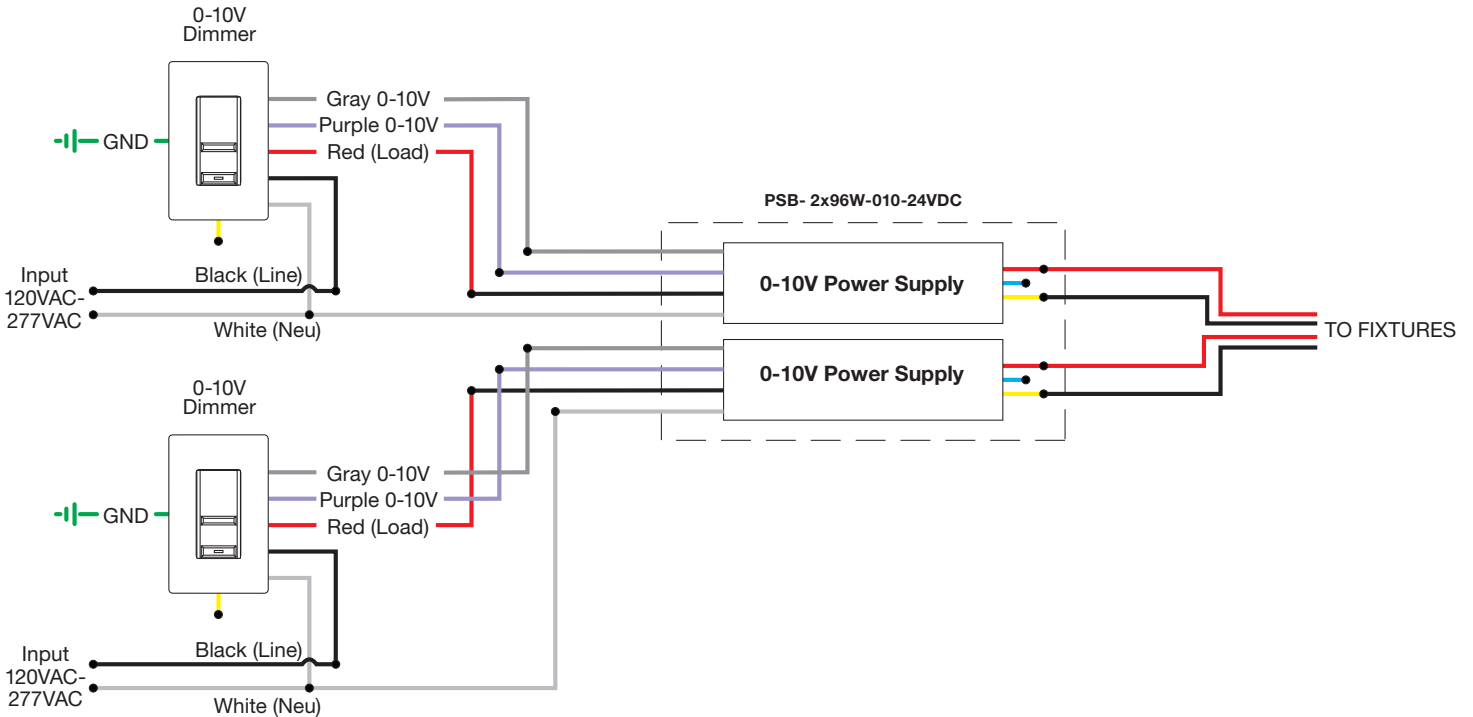

PROJECT	FIXTURE TYPE	DATE

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES
24VDC, UNI - UNIVERSAL DIMMING WITH ELV, TRIAC, & 0-10V

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-40W-UNI-24VDC 	PSB-60W-UNI-24VDC 	PSB-2X40W-UNI-24VDC 	PSB-2X60W-UNI-24VDC 

SPECIFICATIONS				
MAXIMUM LOAD	40W	60W	2X40W	2X60W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-40W-UNI-24VDC-IW	PSB-60W-UNI-24VDC-IW	PSB-2X40W-UNI-24VDC-IW	PSB-2X60W-UNI-24VDC-IW

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-96W-UNI-24VDC 	PSB-2X96W-UNI-24VDC 	PSB-3X96W-UNI-24VDC 	PSB-4X96W-UNI-24VDC 

SPECIFICATIONS				
MAXIMUM LOAD	96W	2X96W	3X96W	4X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-96W-UNI-24VDC-IW	PSB-2X96W-UNI-24VDC-IW	NA	NA

ELV DIMMING & CONTROLS				
LUTRON DIVA: DVELV-300P	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	•


0-10 DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTW-WH, DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•

TRIAC DIMMING & CONTROLS				
LUTRON SKYLARK: S2-L-WH	•	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset: short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90
- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
 - Triac Dimmer : (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer : (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supply's used for LED lighting
 - 0-10 Dimmer : Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

IN WALL MOUNTING OPTIONS

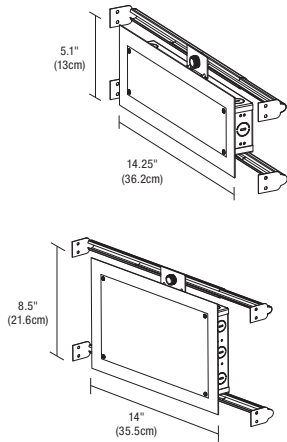

In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.


Ordering Codes 5.1 x 14.25 inch: PSB-40W-UNI-24VDC-IW
PSB-60W-UNI-24VDC-IW
PSB-96W-UNI-24VDC-IW

Ordering Codes 8.5 x 14.25 inch: PSB-2X40W-UNI-24VDC-IW
PSB-2X60W-UNI-24VDC-IW
PSB-2X96W-UNI-24VDC-IW

WIRING DIAGRAMS UNIVERSAL POWER SUPPLY


Application: Triac dimming for two power supplies, use for Static White, Dynamic/Tunable White

Dimming: Dimmable with Triac dimmer: Lutron: Skylark S2-L

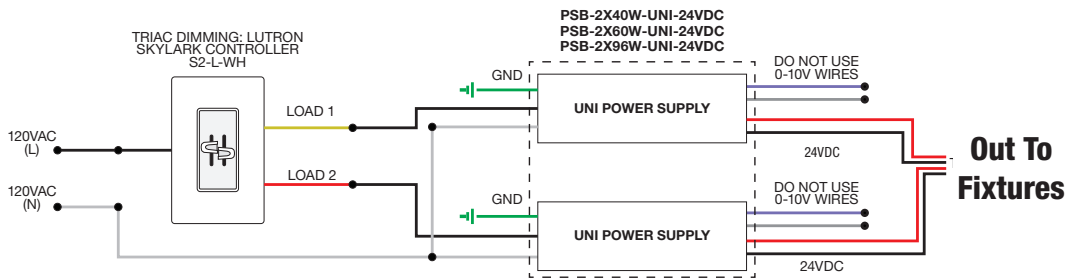


Application: ELV dimming for Static White and Warm Dim

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

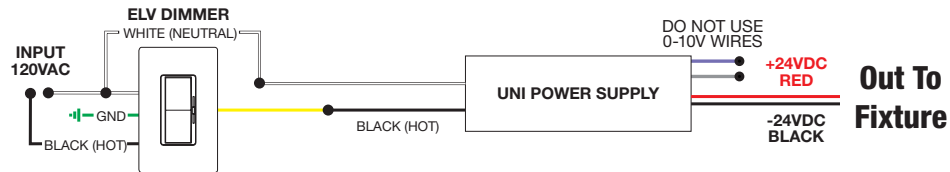




Application: 0-10V dimming for Static White

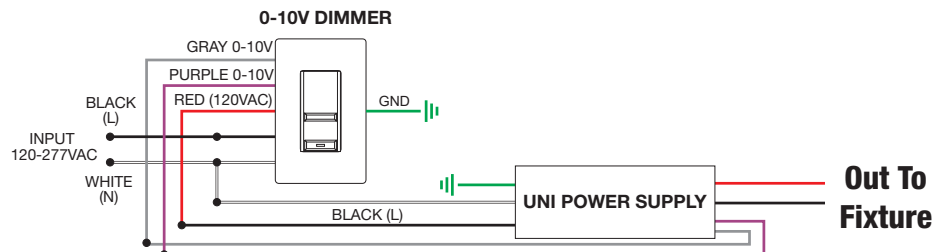Dimming: Dimmable with 0-10V dimmer: Philips Sunrise: SR1200ZTUNV; Lutron Diva: DVTV-WH, DVSTV-WH; Lutron Nova T: NTSTV-DV-XX; Lutron Grafix EYE QS: QSGRJ-XP; Lutron Radio Ra2: RRD-10ND; Leviton: LEV40050; Leviton IP710-LFZ; Legrand: ADPD4FBL3P2W4




PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


LUTRON HI-LUME® PREMIER .1% ECOSYSTEM®†			
ORDERING CODES	L3D0-96W24V-U	2-WIRE ECOSYSTEM LTEA4U1UKL-CV240	3-WIRE ECOSYSTEM L3DA4U1UKL-CV240
			
SPECIFICATIONS			
MAXIMUM LOAD	96W	5W-40W	5W-40W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	10.5" X 5.5" X 2"	4" X 4.89" X 2.62"	4" X 4.89" X 2.62"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
DIMMING AND CONTROLS			
RADIO RA2	•	•	•
HOMEWORKS QS	•	•	•
PHPM-3F-120	•	•	•
PHPM-3F-DV	•	•	•
BCI-0-10	•	•	•

†24K - 57K color temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) color temperatures are only compatible with ELV power supplies.

2-Wire EcoSystem Wiring Diagram

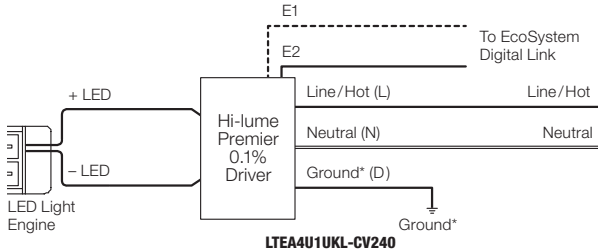


3-Wire Wiring Diagram

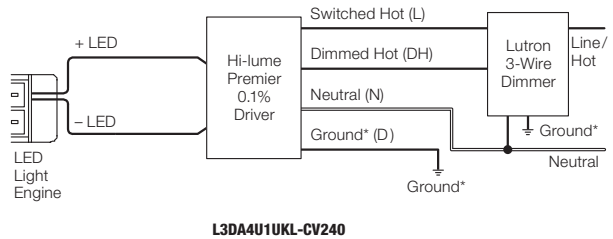

24VDC, DALI


REQUIRED COMPONENTS 24VDC DMX RGB Compatible Power Supplies

DALI DYNAMIC COLOR CHANGING (DMX) POWER SUPPLIES & RECOMMENDED CONTROLLERS†	
ORDERING CODE	PSB-100W-24VDC-DALI
	
SPECIFICATIONS	
MAXIMUM LOAD	100W
INPUT VOLTAGE	120-277VAC
OUTPUT VOLTAGE	24VDC
DIMENSIONS	12.14" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2
IN-WALL MOUNTING	PSB-100W-24VDC-DALI-IW
DIMMING & CONTROLS	
TOUCH SCREEN CONTROLLER (CTP)	•
DMX 1 ZONE RGBW TOUCH CONTROLLER (CDMX1-RGBW)	•
DALI COMPATIBLE	•

†2400K-5700K Color Temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) Color Temperatures are only compatible with ELV Power Supplies.

Tunable White (2K4K) Color Temperature is compatible with 0-10V, ELV, DMX, and Lutron Hi-lume® Power Supplies. Dynamic Color (RGB, RGB+W) and Static Color (Amber, Blue, Green, or Red) are compatible with DMX Power Supplies.

Classification: UL2108 - * 24VDC over 100 Watts, wires must be in insulated cable in compliance with local code from Remote Power Supply to J-box.



8.5" X 14" IN-WALL MOUNTING KIT


Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-100W-24VDC-DALI-IW, PSB-100W-24VDC-RGB-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

DYNAMIC/TUNABLE WHITE CONTROLLER AND POWER SUPPLIES

24VDC INDOOR CONSTANT VOLTAGE POWER SUPPLIES WITH DMX DRIVERS

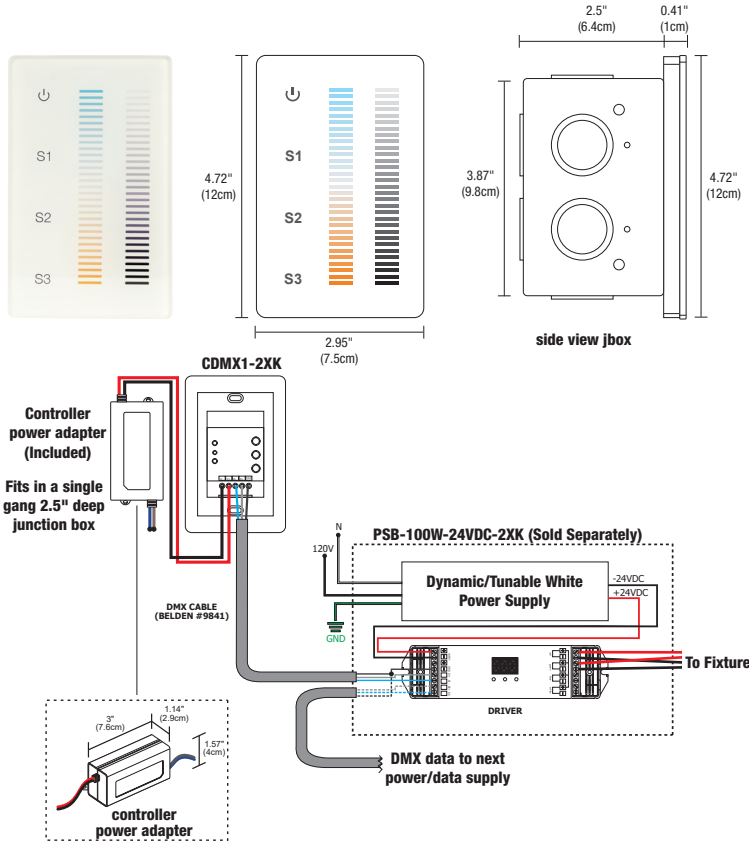

DESCRIPTION:

The Dynamic/Tunable White (**2K4K** or **27K6**) Touch Controller offers fast and accurate Color Temperature adjustment and the ability to regulate the Brightness Independently. The modern Glass faceplate features illuminated indicators, and a back-lit night light that softly illuminates the controller when powered off. Designed for Dynamic/Tunable White, and dual-color LED installations within a single zone. The two Vertical Touch sliders are precise and sensitive, allowing you to fine-tune your perfect Color Temperature at any point between **2000K** (Sunset) to **4000K** (Cool White) or from **2700K** (Incandescent White) to **6500K** (Daylight White) while selecting over 250 levels of Brightness in a smooth, uninterrupted transition. Create Thousands of Dynamic White Color Combinations while maintaining even Brightness and overall saturation. Easily save three pre-set scenes for different times of the day. Support health, performance, and general well-being using Human-Centric lighting by fine-tuning the biological effects that light has on the circadian cycle using the latest in LED technology. Includes a power adapter that fits behind the controller within a standard junction box and fits inside a standard single-gang receptacle (not for use in a multi-gang box). Use with an insulated, 24 AWG stranded, tinned copper wire (Belden #9841). Power Supplies are Sold Separately. Includes a 5 year pro-rated warranty.

APPLICATIONS:

Indoor

OUTPUT SIGNAL:

USITT DMX 512 (1990)

INSTALLATION:

Fits in a single gang 2.5 inch deep junction box. Not compatible with multi-gang boxes.

LABELS:

ROHS, FCC, Damp Location, ETL/UL

POWER INPUT:

120-240VAC

Product	Type	Finish
CDMX1	2XK	WH
CDMX1 DMX Single Zone Touch Controller	2XK Tunable White	WH White


DYNAMIC COLOR CHANGING (DMX) POWER SUPPLIES & RECOMMENDED CONTROLLERS*

ORDERING CODE	PSB-100W-24VDC-2XK	PSB-2X100W-24VDC-2XK	PSB-3X100W-24VDC-2XK	PSB-4X100W-24VDC-2XK
MAXIMUM LOAD OF LED STRIP LENGTH	100W 5 WATTS - 20FT MAX. 10 WATTS - 10FT MAX.	2X100W 5 WATTS 2 X 20FT MAX. 10 WATTS - 2 X 10FT MAX.	3X100W 5 WATTS 3 X 20FT MAX. 10 WATTS - 3 X 10FT MAX.	4X100W 5 WATTS 4 X 20FT MAX. 10 WATTS - 4 X 10FT MAX.
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 6.48" X 2.18"	14" X 10" X 3"	17" X 10" X 3"	17" X 10" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-100W-24VDC-2XK-IW	NA	NA	NA
DMX DYNAMIC/TUNABLE WHITE DIMMING & CONTROLS				
TUNABLE WHITE TOUCH CONTROLLER (CDMX1-2XK)	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements

- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90

IN WALL MOUNTING OPTIONS



8.5 x 14 inch In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes: PSB-100W-24VDC-2XK-IW


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

SUSPENSION TM30 DATA

LED SUSPENSION WITH POWER

TM-30-15 DATA: The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2200K | Rf: 83.9 | Rg: 94.9
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	78.8	-9.5%	1.3%
2	80.7	-7.8%	6.7%
3	78.2	-3.3%	9.4%
4	89.7	-2.8%	3.6%
5	93.2	-0.8%	2.6%
6	93.0	-0.6%	-0.7%
7	87.7	-5.9%	-3.5%
8	89.2	-6.8%	1.9%
9	83.4	-5.6%	6.0%
10	79.3	-3.7%	10.8%
11	81.4	2.9%	11.1%
12	84.9	5.3%	4.9%
13	88.1	4.9%	-10.1%
14	68.1	0.1%	-19.5%
15	86.0	-3.3%	-7.3%
16	76.4	-8.9%	-11.7%


2400K | Rf: 91.2 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%


2700K | Rf: 87.7 | Rg: 96.1
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%


3000K | Rf: 88.1 | Rg: 99.7
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%


3500K | Rf: 86.1 | Rg: 95.5
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


SUSPENSION TM30 DATA

LED SUSPENSION WITH POWER

TM-30-15 DATA: The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

5700K | Rf: 80.3 | Rg: 91.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	75.4	-8.9%	4.7%
2	87.5	-2.6%	4.6%
3	90.7	-3.0%	-0.5%
4	83.2	-6.0%	-5.7%
5	76.2	-12.9%	-5.3%
6	81.4	-11.9%	-2.6%
7	74.8	-14.0%	5.1%
8	69.0	-9.0%	14.1%
9	72.6	-3.6%	22.2%
10	71.4	2.7%	16.1%
11	81.3	7.9%	5.3%
12	83.6	4.1%	-9.4%
13	78.4	0.7%	-15.3%
14	77.7	-6.2%	-11.0%
15	68.8	-1.3%	-21.2%
16	80.8	-9.6%	3.3%

2700D | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%

2K4K (3000K) | Rf: 90.2 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------