

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 05.16.24




DESCRIPTION

Cirrus Suspension D1 with Up light and Remote 24VDC Power Supply (sold separately) is a linear LED fixture that offers Indirect Uplighting in a clean, contemporary style. Up to 1000 Lumens per foot and available in increments from 12"-420". Choose High or Standard Efficiency offered in multiple color temperatures ranging from 2400K to 4000K, including two Warm Dim options of 2700K (**27D**) or 3000K (**30D**) that dim down to 2000K. Order the Cirrus D1 Suspension with either a Diffused White Lens with a 100° Beam Spread or a Clear Frosted 60° Lens. Remote 24VDC power supplies are required and ordered separately. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

INSTALLATION

- Mounts to a Standard Junction Box, pre-wired from either a 120V with a 50 Watt Power Supply that fits in the ceiling Electrical Junction Box, or from a Remote Power Supply feeding 24VDC up to 100 Watts at a maximum of 40' away
- Includes Canopy of your choice: 2.8", 4.6", 2 x 2.8" or 2 x 4.6" available in Round or Square, Pairs - One for remote power and one for a blank end cap, and VR (Vanishing Point)
- Includes adjustable 12' Coaxial and Aircraft Cables (additional Aircraft Cables included for support when fixture exceeds 72")
- Power Supplies sold separately

FINISHES

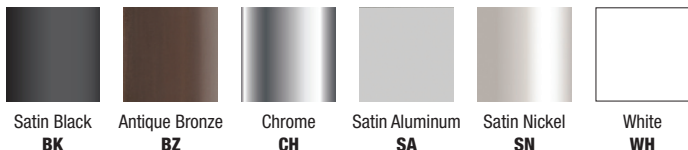

LENSES

Diffused White 100° Lens or Clear Frosted 60° Lens

LAMPING

- Choose from multiple different Color Temperatures from 2400K-4000K including Warm Dim
- Warm Dim: 2700K-2000K (**27D**) or 3000K-2000K (**30D**)
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- [Pure Smart™ WiZ Pro Power Supplies & Controls](#)
- [Electronic Low Voltage \(ELV\)†](#) 50W (fits inside junction box)
- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)

Lutron

- [Lutron Hi-Lume/Ecosystem](#)

*In-Wall Mounting Kits available for select power supplies

†ELV power supplies are not compatible with nLight, use only Universal power supplies

APPROVALS

Damp Location, ROHS, Title 24 JA8 listed with universal power supplies in 27K> CCT, ETL Listed, Class 2 wiring

APPLICATIONS

Designed for indoor use only. Ideal applications in Commercial, Retail, Residential, Hospitality, Education, and Healthcare Institutions.

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
CSDSUR	2W	2R	420	27K	SN
CSDSUR Cirrus Suspension, Diffused Lens Uplight, Standard Efficiency, Remote Power	2W 2.5 Watt (420" max, 35')	2R 2.8" Round Canopy	12-420 Order in various increments from 12"-420"	24K 2400K Very Warm White	BK Satin Black
CSDHUR Cirrus Suspension, Diffused Lens Uplight, High Efficiency, Remote Power	5W 5 Watt (240" max, 20')	2S 2.8" Square Canopy		27K 2700K Incandescent White	BZ Antique Bronze
CSCSUR Cirrus Suspension, Clear Lens Uplight, No Louver, Remote Power	7W 7.5 Watt (144" max, 12')	4R 4.6" Round Canopy		27D 2700K Warm Dim (5W only)	CH Chrome
	10W 10 Watt (120" max, 10')	4S 4.6" Square Canopy		30K 3000K Warm White	SA Satin Aluminum
		VR Vanishing Point Plaster in system with No Canopy		30D 3000K Warm Dim (5W only)	SN Satin Nickel
		2R2 2 x 2.8" Round Canopies	*Maximum shipping length is 120", 84" for chrome.	35K 3500K Neutral White	WH White
		2S2 2 x 2.8" Square Canopies	**See length chart for exact dimensions	40K 4000K Cool White	BB Satin Brass with Black Canopy and End Caps
		4R2 2 x 4.6" Round Canopies			BW Satin Brass with White Canopy and End Caps
		4S2 2 x 4.6" Square Canopies			

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED

LAMP DATA Lamp Data for Cirrus Suspension D1

CSDS																						
DESCRIPTION	STANDARD EFFICIENCY, 100° DIFFUSED WHITE LENS																					
WATTS PER FOOT	2W (2.5 watts)					5W (4.4 watts)					7W (7.3 watts)					10W (9.6 watts)						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	137	139	161	166	175	284	287	341	299	341	344	362	438	443	461	530	558	542	547	570	656	690
LUMENS PER WATT (lm/w)	55	55	58	66	70	65	65	71	68	71	78	82	60	61	63	73	76	56	57	59	68	72
CRI	90+	95+	95+	85+	85+	90+	95+	93+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+

CSDH																						
DESCRIPTION	HIGH EFFICIENCY, 100° DIFFUSED WHITE LENS																					
WATTS PER FOOT	2W (2.5 watts)					5W (4.4 watts)					7W (7.3 watts)					10W (9.6 watts)						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	165	166	194	199	210	341	345	409	359	409	413	435	526	531	553	636	670	650	657	684	787	828
LUMENS PER WATT (lm/w)	66	67	69	80	84	78	78	85	82	85	94	99	72	73	76	87	92	68	68	71	82	86
CRI	90+	95+	95+	85+	85+	90+	95+	93+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+

CCCS																						
DESCRIPTION	100° CLEAR LENS NO LOUVER																					
WATTS PER FOOT	2W (2.5 watts)					5W (4.4 watts)					7W (7.3 watts)					10W (9.6 watts)						
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	155	157	182	188	197	321	325	385	338	385	389	409	495	500	521	599	630	612	618	644	741	779
LUMENS PER WATT (lm/w)	62	63	65	75	79	73	74	80	77	80	88	93	68	69	71	82	86	64	64	67	77	81
CRI	90+	95+	95+	85+	85+	90+	95+	93+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+


*27D, 30D - Warm Dim (4.8 Watts)

8', 3000K DIFFUSED WHITE LENS


2 Watt 100°		5 Watt 100°		7 Watt 100°		10 Watt 100°	
Distance	Foot Candles	Distance	Foot Candles	Distance	Foot Candles	Distance	Foot Candles
1'	76	1'	122	1'	200	1'	227
1.5'	49	1.5'	80	1.5'	131	1.5'	148
2'	36	2'	59	2'	96	2'	110
3'	23	3'	38	3'	62	3'	71
4'	16	4'	27	4'	45	4'	51
5'	12	5'	20	5'	33	5'	38
6'	9	6'	15	6'	26	6'	30
7'	7	7'	12	7'	21	7'	23
8'	5	8'	10	8'	18	8'	18




DIFFUSED WHITE LENS



CHANNEL (ACTUAL SIZE)



100° BEAM SPREAD



PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED

LENGTH CHART Actual lengths for Cirrus Suspension D1

STATIC WHITE														
Nominal Length (Inches)	Actual Length (Inches)	Total Wattage (2W)	Total Wattage (5W)	Total Wattage (7W)	Total Wattage (10W)	Nominal Length (Inches)	Actual Length (Inches)	Total Wattage (2W)	Total Wattage (5W)	Total Wattage (7W)	Nominal Length (Inches)	Actual Length (Inches)	Total Wattage (2W)	Total Wattage (5W)
12	13	2	5	8	10	149	149.8	31	62	93	286	286.6	60	
15	15.4	3	6	9	12	152	152.2	32	63	95	288	289.0	60	
17	17.8	4	7	11	14	154	154.6	32	64	96	291	291.4	61	
20	20.2	4	8	13	17	156	157.0	33	65	98	293	293.8	61	
22	22.6	5	9	14	18	159	159.4	33	66	99	296	296.2	62	
24	25	5	10	15	20	161	161.8	34	67		298	298.6	62	
27	27.4	6	11	17	22	164	164.2	34	68		300	301.0	63	
29	29.8	6	12	18	24	166	166.6	35	69		303	303.4	63	
32	32.2	7	13	20	27	168	169.0	35	70		305	305.8	64	
34	34.6	7	14	21	28	171	171.4	36	71		308	308.2	64	
36	37.0	7	15	23	30	173	173.8	36	72		310	310.6	65	
39	39.4	8	16	24	32	176	176.2	37	73		312	313.0	65	
41	41.8	9	17	26	34	178	178.6	37	74		315	315.4	66	
44	44.2	9	18	28	37	180	181.0	38	75		317	317.8	66	
46	46.6	10	19	29	38	183	183.4	38	76		320	320.2	67	
48	49.0	10	20	30	40	185	185.8	39	77		322	322.6	67	
51	51.4	11	21	32	42	188	188.2	39	78		324	325.0	68	
53	53.8	11	22	33	44	190	190.6	40	79		327	327.4	68	
56	56.2	12	23	35	47	192	193.0	40	80		329	329.8	69	
58	58.6	12	24	36	48	195	195.4	41	81		332	332.2	69	
60	61.0	12	25	38	50	197	197.8	41	82		334	334.6	70	
63	63.4	13	26	39	52	200	200.2	42	83		336	337.0	70	
65	65.8	14	27	41	54	202	202.6	42	84		339	339.4	71	
68	68.2	14	28	43	57	204	205.0	43	85		341	341.8	71	
70	70.6	15	29	44	58	207	207.4	43	86		344	344.2	72	
72	73.0	15	30	45	60	209	209.8	44	87		346	346.6	72	
75	75.4	16	31	47	62	212	212.2	44	88		348	349.0	73	
77	77.8	16	32	48	64	214	214.6	45	89		351	351.4	73	
80	80.2	17	33	50	67	216	217.0	45	90		353	353.8	74	
82	82.6	17	34	51	68	219	219.4	46	91		356	356.2	74	
84*	85.0	17	35	53	70	221	221.8	46	92		358	358.6	75	
87	87.4	18	36	54	72	224	224.2	47	93		360	361.0	75	
89	89.8	19	37	56	74	226	226.6	47	94		363	363.4	76	
92	92.2	19	38	58	77	228	229.0	48	95		365	365.8	76	
94	94.6	20	39	59	78	231	231.4	48	96		368	368.2	77	
96	97.0	20	40	60	80	233	233.8	49	97		370	370.6	77	
99	99.4	21	41	62	82	236	236.2	49	98		372	373.0	78	
101	101.8	21	42	63	84	238	238.6	50	99		375	375.4	78	
104	104.2	22	43	65	87	240	241.0	50	100		377	377.8	79	
106	106.6	22	44	66	88	243	243.4	51			380	380.2	79	
108	109.0	22	45	68	90	245	245.8	51			382	382.6	80	
111	111.4	23	46	69	92	248	248.2	52			384	385.0	80	
113	113.8	24	47	71	94	250	250.6	52			387	387.4	81	
116	116.2	24	48	73	97	252	253.0	53			389	389.8	81	
118	118.6	25	49	74	98	255	255.4	53			392	392.2	82	
120**	121.0	25	50	75	100	257	257.8	54			394	394.6	82	
123	123.4	26	51	77		260	260.2	54			396	397.0	83	
125	125.8	26	52	78		262	262.6	55			399	399.4	83	
128	128.2	27	53	80		264	265.0	55			401	401.8	84	
130	130.6	27	54	81		267	267.4	56			404	404.2	84	
132	133.0	28	55	83		269	269.8	56			406	406.6	85	
135	135.4	28	56	84		272	272.2	57			408	409.0	85	
137	137.8	29	57	86		274	274.6	57			411	411.4	86	
140	140.2	29	58	87		276	277.0	58			413	413.8	86	
142	142.6	30	59	89		279	279.4	58			416	416.2	87	
144	145.0	30	60	90		281	281.8	59			418	418.6	87	
147	147.4	31	61	92		284	284.2	59			420	421.0	88	

*Maximum Chrome Shipping Length **Max Shipping Length

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED

LENGTH CHART Actual lengths for Cirrus Suspension D1

WARM DIM (27D & 30D)					
Nominal Length (Inches)	Actual Length (Inches)	Total Wattage (5W)	Nominal Length (Inches)	Actual Length (Inches)	Total Wattage (5W)
12	13.0	5	129	130.4	54
15	16.0	6	132	133.4	55
18	19.0	8	135	136.4	56
21	22.0	9	138	139.4	58
24	25.0	10	141	142.4	59
27	28.0	11	144	145.4	60
30	31.0	13	147	148.4	61
33	34.0	14	150	151.4	63
36	37.0	15	153	154.4	64
39	40.0	16	156	157.4	65
42	43.0	18	159	160.4	66
45	46.0	19	162	163.4	68
48	49.0	20	165	166.4	69
51	52.0	21	168	169.4	70
54	55.0	23	171	172.4	71
57	58.0	24	174	175.4	73
60	61.0	25	177	178.4	74
63	64.0	26	180	181.4	75
66	67.0	28	183	184.4	76
69	70.0	29	186	187.4	78
72	73.0	30	189	190.4	79
75	76.0	31	192	193.4	80
78	79.0	33	195	196.4	81
81	82.0	34	198	199.4	83
84*	85.0	35	201	202.4	84
87	88.0	36	204	205.4	85
90	91.0	38	207	208.4	86
93	94.0	39	210	211.4	88
96	97.0	40	213	214.4	89
99	100.0	41	216	217.4	90
102	103.0	43	219	220.4	91
105	106.0	44	222	223.4	93
108	109.0	45	225	226.4	94
111	112.0	46	228	229.4	95
114	115.0	48	231	232.4	96
117	118.0	49	234	235.4	98
120**	121.0	50	237	238.4	99
123	124.4	51	240	241.4	100
126	127.4	53			

*Maximum Chrome Shipping Length **Max Shipping Length


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION D1, INDIRECT


24VDC REMOTE POWER, END FEED

DRAWINGS Drawings are shown with 2" Round Canopy, 2" Square Canopy, 4" Round Canopy, and 4" Square Canopy



2" Round Canopy
 50 Watt (PS-60L-ELV-24VDC) Power Supply
 will fit in J-box





Cirrus Suspension Uplight, 2" Round Canopy - Bottom View

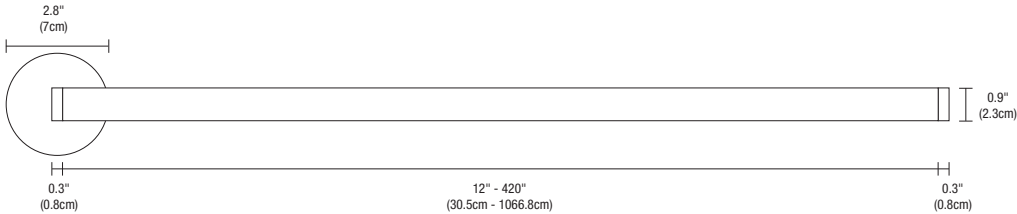



Cirrus Suspension Uplight, 2" Square Canopy - Bottom View

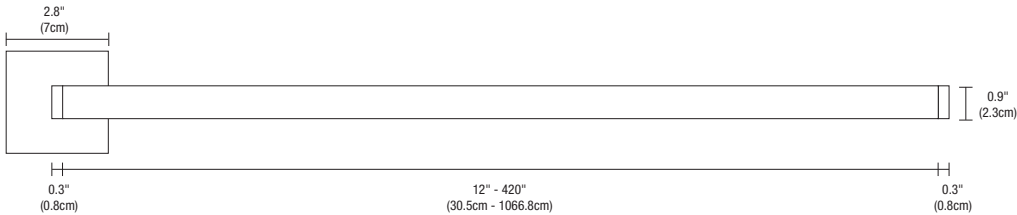



Cirrus Suspension Uplight, 4" Round Canopy - Bottom View

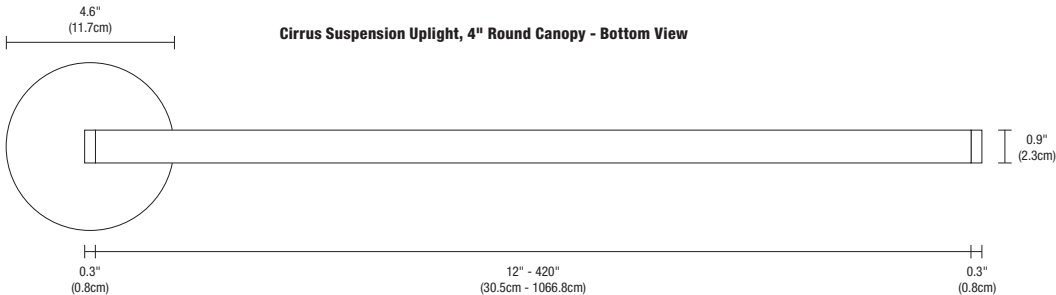

Cirrus Suspension Uplight, 4" Square Canopy - Bottom View

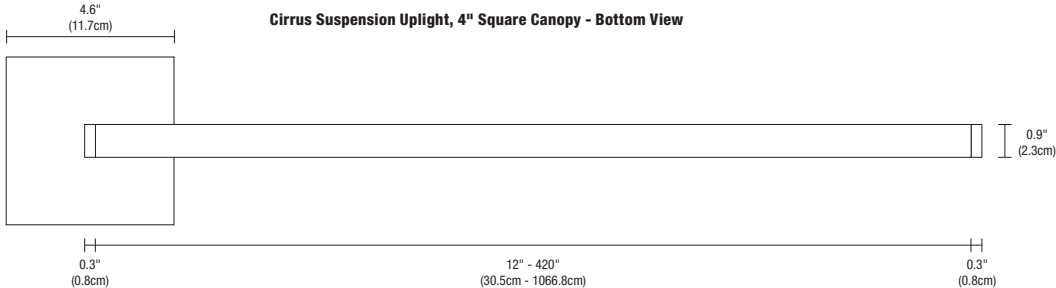

Cirrus Suspension Downlight, Vanishing Point - Bottom View




PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED


REMOTE POWER CANOPIES

The 2" Round and Square Canopy includes a NC2-JBOX junction box cover. The 4" canopies mount to a standard 4" junction box. Vanishing point is the only truly trimless and flush design available on the market with cables that disappear into the ceiling. Refer to the [Vanishing Point specification](#) for details and requirements including millwork options.

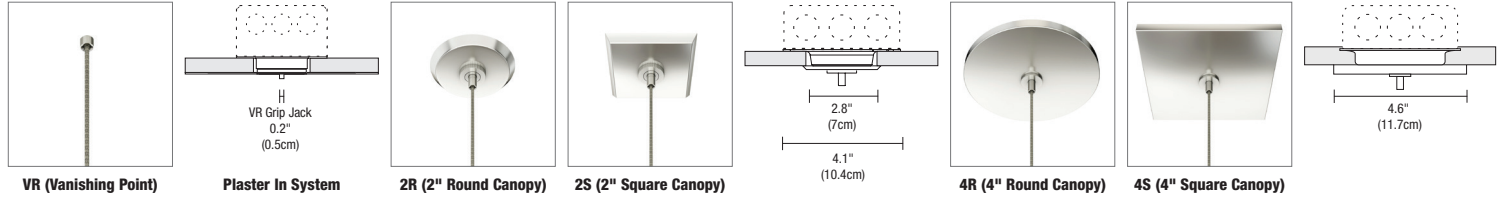


NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

The New Construction NC2-JBOX cover is included with the 2" Round and Square canopies and is not required for the 4" square canopies. The NC2 cover mounts to a standard 4" junction or octagon box accommodating the 2" Plaster Ring for use with the 2R and 2S canopies. The Remodel RM2-JBOX plaster plate cover must be used with the supplied PureEdge junction box.

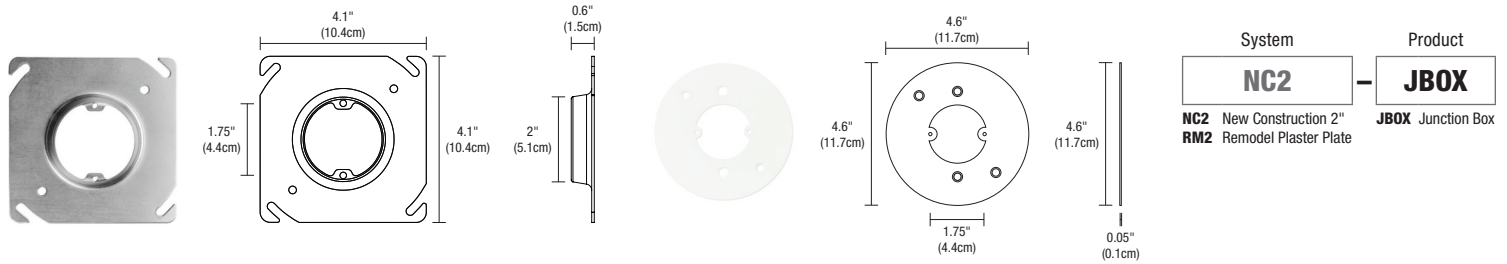


ACCESSORIES Additional components may be required based on lighting design and application.

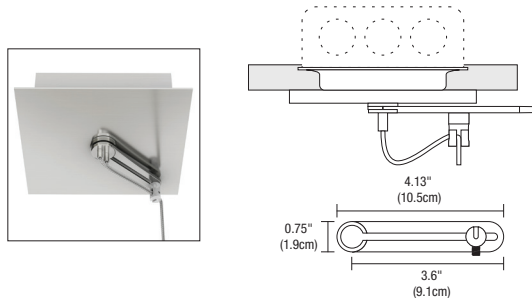

CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, 2S, 4R and 4S Power Canopies (Canopy not included).


Product	Type	Finish
CS	ADJ-DP-SWAG	SN
CS Channel Suspension	ADJ-SWAG Adjustable Swag Hook for Static White ADJ-DP-SWAG Dual Post Adjustable Swag Hook for 2K4K & RGB	SN Satin Nickel

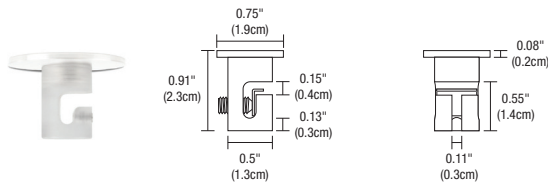

CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

System	Type
CS	SWAG
CS Channel Suspension	SWAG Swag Hook

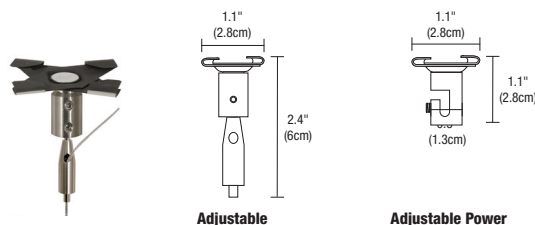

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Adjustable is offered in Satin Nickel, Clear plastic for Adjustable Power.

Product	Type	Options	Finish
CS	TBAR	A	WH
CS Channel Suspension	TBAR 9/16" and 15/16"	A Adjustable AP Adjustable Power	BK Black WH White




PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION D1, INDIRECT

24VDC REMOTE POWER, END FEED

REV 05.16.24

DRAWINGS Side View shown with Vanishing Point, 2" and 4" Canopies; one for Remote Power, one Blank

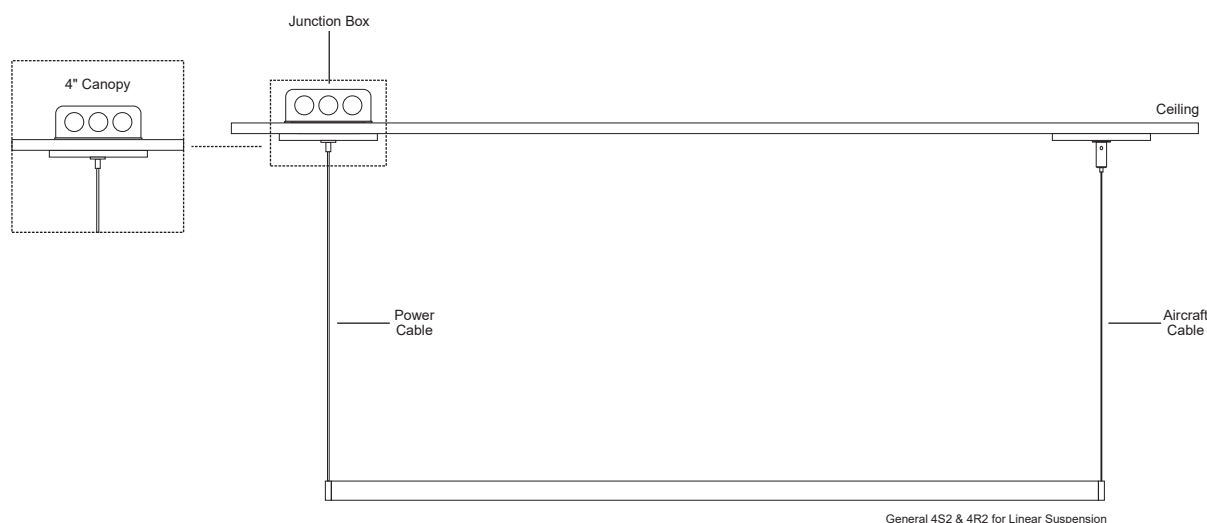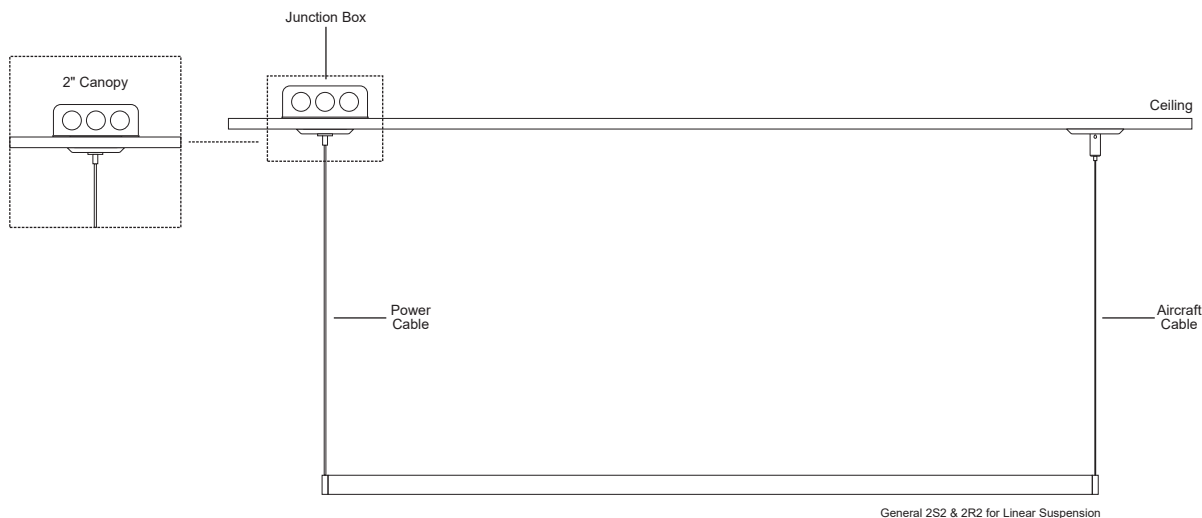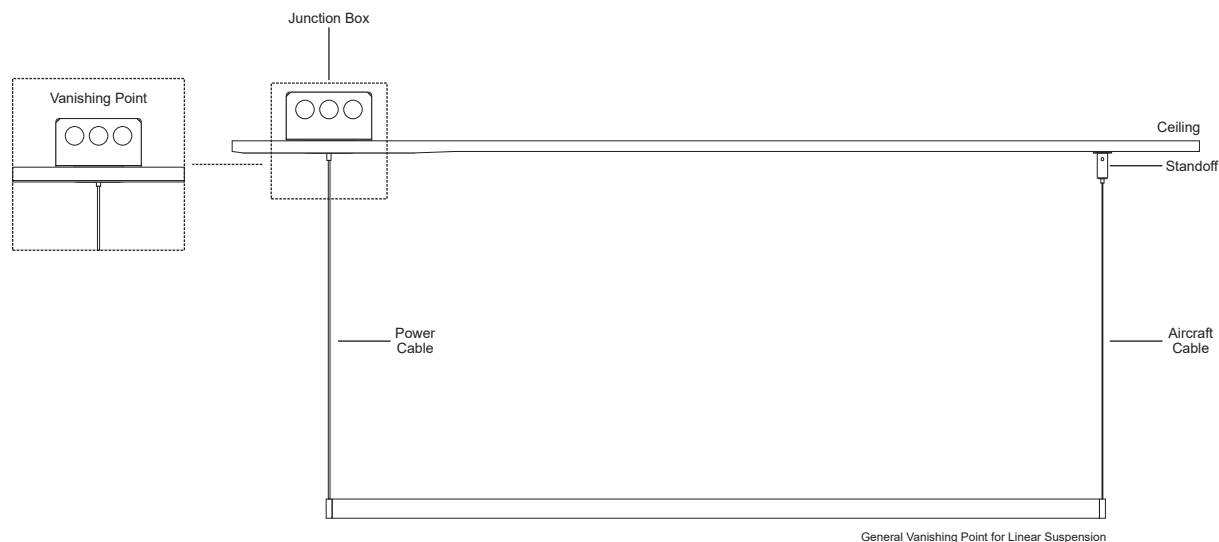

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


TM30 DATA

24VDC REMOTE POWER, END FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.4	-5.6%	2.3%
2	89.7	-3.3%	3.1%
3	90.5	-1.5%	3.8%
4	90.0	-4.3%	1.1%
5	92.9	-3.7%	0.2%
6	93.5	-2.5%	-0.8%
7	86.3	-7.2%	2.5%
8	90.7	-4.0%	3.2%
9	85.2	-2.4%	8.1%
10	81.7	0.9%	10.8%
11	85.4	4.5%	8.9%
12	88.7	5.7%	-1.4%
13	88.3	1.3%	-7.9%
14	85.1	2.4%	-10.4%
15	88.1	-4.8%	-2.7%
16	81.7	-4.3%	-10.9%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.9%	-0.3%
2	87.9	-4.4%	4.3%
3	82.9	-1.2%	7.9%
4	89.9	0.6%	4.7%
5	92.7	3.0%	3.5%
6	92.7	3.6%	-1.7%
7	90.8	-1.3%	-4.4%
8	93.7	-2.5%	-2.2%
9	91.7	-3.7%	2.3%
10	85.5	-2.8%	7.8%
11	83.3	0.7%	11.0%
12	86.4	5.5%	3.8%
13	90.6	4.6%	-3.6%
14	85.6	5.9%	-8.4%
15	89.5	-0.6%	-5.7%
16	82.6	-2.7%	-12.0%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.6	-4.2%	3.4%
2	91.7	-1.4%	1.8%
3	94.9	-0.7%	0.4%
4	87.9	-4.5%	-4.1%
5	85.9	-10.3%	-2.7%
6	89.8	-5.2%	-0.4%
7	79.6	-9.5%	6.5%
8	87.6	-4.0%	5.7%
9	81.4	-0.5%	11.8%
10	78.3	3.3%	11.4%
11	85.7	6.3%	6.1%
12	86.3	7.1%	-4.6%
13	86.1	-0.7%	-9.6%
14	85.1	0.8%	-10.4%
15	83.4	-4.1%	-5.3%
16	82.5	-3.6%	-5.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference


		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	89.0	-3.1%	2.1%
2	93.2	-0.9%	1.3%
3	94.3	-1.1%	0.7%
4	89.5	-4.0%	-2.3%
5	87.6	-7.8%	-1.8%
6	92.2	-4.6%	0.1%
7	87.4	-6.6%	3.6%
8	85.7	-3.8%	7.0%
9	81.5	-1.3%	12.4%
10	80.0	0.9%	11.4%
11	83.3	5.9%	8.7%
12	89.7	4.8%	-0.3%
13	88.5	2.4%	-6.3%
14	92.7	4.0%	-3.8%
15	86.1	-1.6%	-4.5%
16	85.0	-1.4%	-5.0%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TM30 DATA
24VDC REMOTE POWER, END FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2700D | Rf: 89.5 | Rg: 100.8
Color Vector Graphic



Test Reference

Table with 4 columns: HUE BIN, Rf, CHROMA, HUE. Rows 1-16 showing color shift data for 2700D.

3000D | Rf: 89.8 | Rg: 101.4
Color Vector Graphic



Test Reference

Table with 4 columns: HUE BIN, Rf, CHROMA, HUE. Rows 1-16 showing color shift data for 3000D.