

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING

REV 05.22.24



DESCRIPTION

The New Generation of our Cirrus Suspension Wall Wash with Shield is precision-engineered to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. Available in 5, 7 or 10 watts per foot, with designer-grade up to 95+ CRI LEDs rendering art and colors in their truest forms. Optional Black or White Louver available for additional diffusion. Powered by Class 2, 24VDC surface power supplies that can or, a 60W ELV power supply that fits within the junction box (ordered separately). Ordered in various increments, from 12"-240". Lengths greater than 240" or making 90° turns contact us for a custom quotation. Fixtures include a 5 year pro-rated warranty. For custom designs and quotes, email our design team: design@PureEdgeLighting.com

Wattages for this fixture are available in the following options:

- 5W - 4.4 watts per foot, lengths up to 240" (20')
- 7W - 7.3 watts per foot, lengths up to 240" (24')
- 10W - 9.6 watts per foot, lengths up to 216" (18')

INSTALLATION

- Remote power
- Includes adjustable 12ft coaxial cables (additional aircraft cables included for support when fixture exceeds 96")

FINISHES



LENS

Diffused asymmetric wall wash lens creates a smooth and uniform beam spread

LAMPING

- Power Consumed: 5,7 and 10 watts per foot
- Multiple color temperatures including Warm Dim
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

Static White & Warm Dim

- Pure Smart™ WiZ Pro [Power Supplies & Controls](#)
- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- ELV & TRIAC [Smart Dimmer & Switch](#)
- [Electronic Low Voltage \(ELV\)*](#) 50W IC (fits inside junction box)

Lutron

- [Lutron](#) Hi-Lume/Ecosystem

*In-Wall Mounting Kits available for select power supplies


*ELV power supplies are not compatible with nLight, use only Universal power supplies

APPLICATIONS

Designed for indoor or damp location. Ideal environments include: Kitchens, dining rooms, hallways, conference rooms, offices, architectural and retail.

APPROVALS

Damp Location, ETL Listed, Class 2 wiring

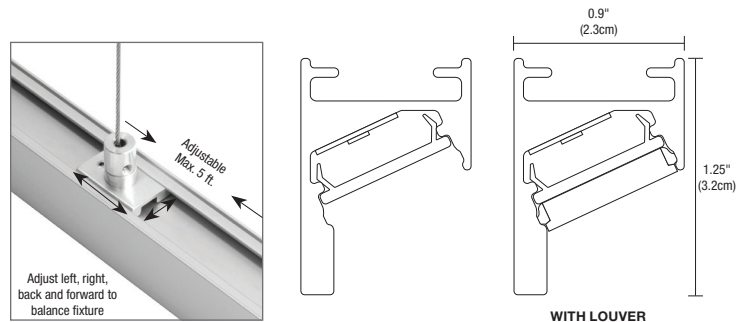

System	Wattage Per Foot	Canopy	Nominal Size	Color Temperature	Finish
CSWSHL	7W	4R	240	27K	SN
CSWSHL Cirrus Suspension Wall Wash with Glare Shield, Left Remote Power Feed	5W 5Watt (240" max)	2R 2.8" Round Canopy	12-240 Order in various increments from 12" to 240" Maximum shipping length is 120"	24K 2400K Very Warm White	BK Satin Black
CSWSHR Cirrus Suspension Wall Wash with Glare Shield, Right Remote Power Feed	7W 7.3 Watt (144" max)	2S 2.8" Square Canopy		27K 2700K Warm White	BZ Antique Bronze
CSWSHL Cirrus Suspension Wall Wash with Glare Shield White Louver, Left Remote Power Feed	10W 9.6 Watt (120" max)	4R 4.6" Round Canopy		27D 2700K Warm Dim (5W Only)	SN Satin Nickel
CSWSHWR Cirrus Suspension Wall Wash with Glare Shield White Louver, Right Remote Power Feed		4S 4.6" Square Canopy		30K 3000K Warm White	WH White
CSWSHBL Cirrus Suspension Wall Wash with Glare Shield Black Louver, Left Remote Power Feed		VR Vanishing Point Plaster in system with No Canopy	*See length chart for exact dimensions	30D 3000K Warm Dim (5W Only)	XX Custom Finish
CSWSHBR Cirrus Suspension Wall Wash with Glare Shield Black Louver, Right Remote Power Feed				35K 3500K Neutral White	
				40K 4000K Cool White	

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--







CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

NOMINAL LAMP DATA: Lamp data Cirrus Suspension Wall Wash with Glare Shield


	CSWSH																
DESCRIPTION	CIRRUS WALL WASH WITH GLARE SHIELD																
WATTS PER FOOT	5W (4.4 watts)							7W (7.3 watts)					10W (9.6 watts)				
COLOR TEMPERATURE	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	290	319	395	348	395	399	434	474	521	569	652	709	614	675	738	845	919
LUMENS PER WATT (lm/w)	66	72	82	79	82	91	98	65	71	78	89	97	64	70	77	88	96
CRI	90+	95+	92+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+

*27D, 30D - Warm Dim (4.8 Watts)

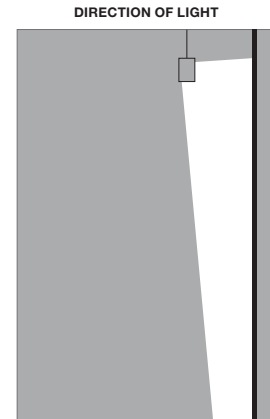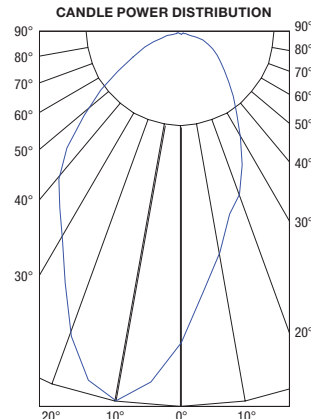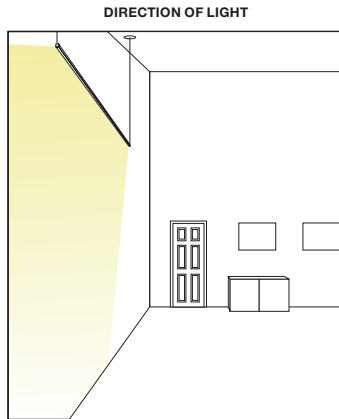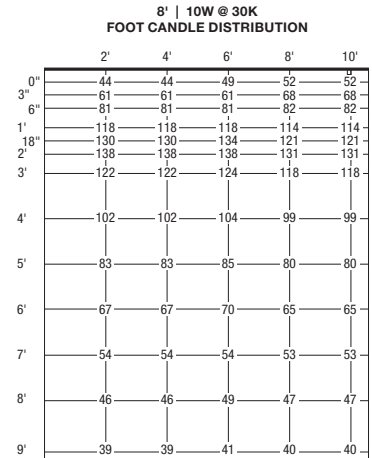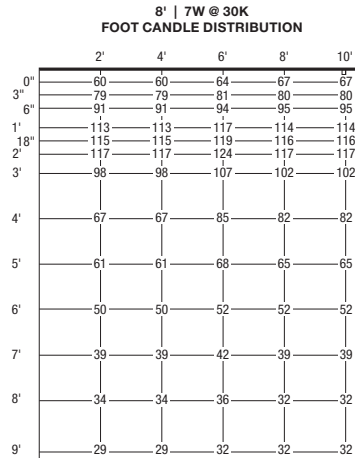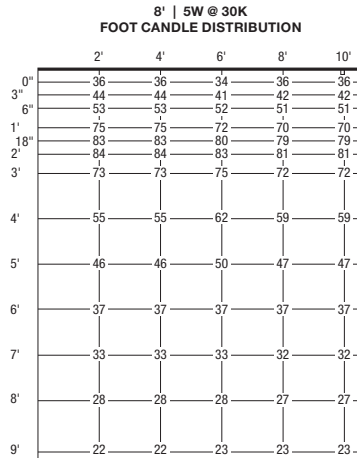


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD 24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

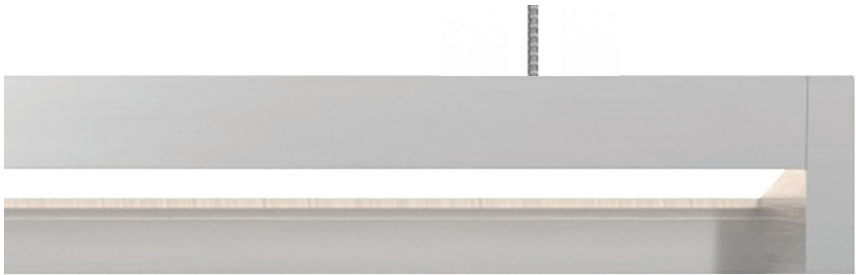


CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

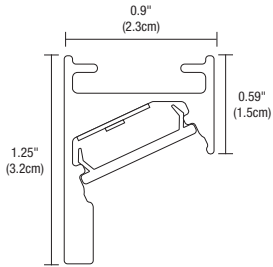

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

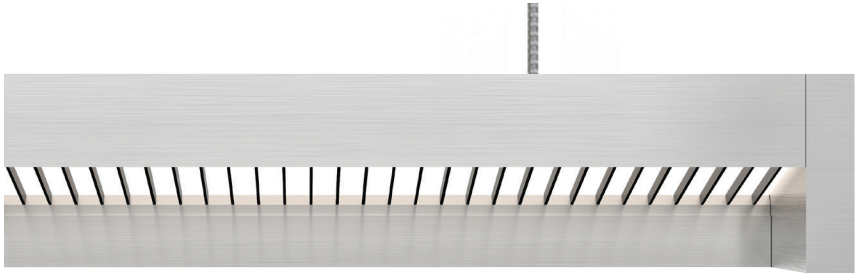

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD AND BLACK LOUVER

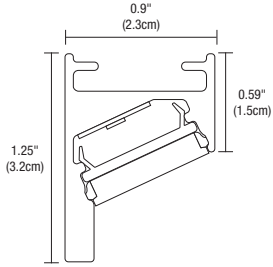

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD AND LOUVER





CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD



CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD AND WHITE LOUVER

DRAWINGS Canopy & Channel drawings for the Cirrus

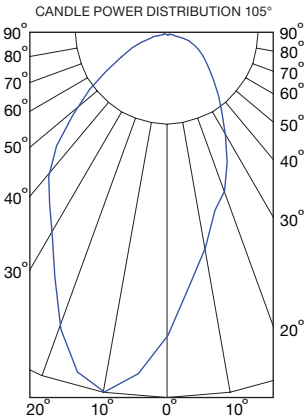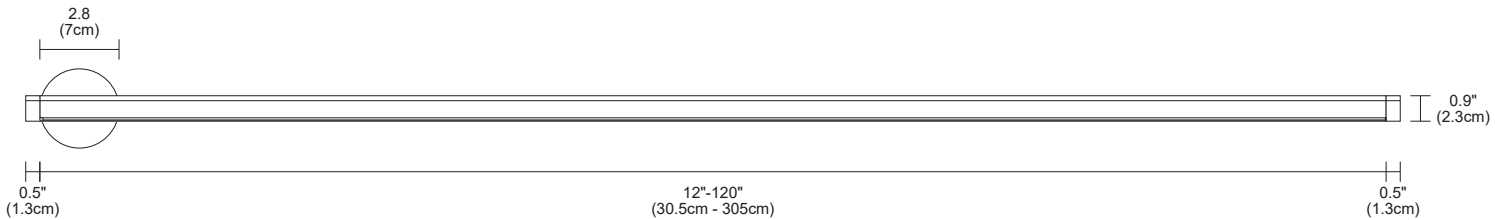

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD PURE

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

Length Chart: Actual lengths for Cirrus Ceiling Wall Wash with Glare Shield

STATIC WHITE							
Ordering Code (Nominal Size)	Actual Length (Inches)	5W (4.4 Watts)	Power Supply	7W (7.3 Watts)	Power Supply	10W (9.6 Watts)	Power Supply
12	13	5	PSB-40W-UNI-24VDC	8	PSB-40W-UNI-24VDC	10	PSB-40W-UNI-24VDC
15	15.4	6	PSB-40W-UNI-24VDC	9	PSB-40W-UNI-24VDC	12	PSB-40W-UNI-24VDC
17	17.8	7	PSB-40W-UNI-24VDC	11	PSB-40W-UNI-24VDC	14	PSB-40W-UNI-24VDC
20	20.2	8	PSB-40W-UNI-24VDC	13	PSB-40W-UNI-24VDC	17	PSB-40W-UNI-24VDC
22	22.6	9	PSB-40W-UNI-24VDC	14	PSB-40W-UNI-24VDC	18	PSB-40W-UNI-24VDC
24	25	10	PSB-40W-UNI-24VDC	15	PSB-40W-UNI-24VDC	20	PSB-40W-UNI-24VDC
27	27.4	11	PSB-40W-UNI-24VDC	17	PSB-40W-UNI-24VDC	22	PSB-40W-UNI-24VDC
29	29.8	12	PSB-40W-UNI-24VDC	18	PSB-40W-UNI-24VDC	24	PSB-40W-UNI-24VDC
32	32.2	13	PSB-40W-UNI-24VDC	20	PSB-40W-UNI-24VDC	27	PSB-40W-UNI-24VDC
34	34.6	14	PSB-40W-UNI-24VDC	21	PSB-40W-UNI-24VDC	28	PSB-40W-UNI-24VDC
36	37	15	PSB-40W-UNI-24VDC	23	PSB-40W-UNI-24VDC	30	PSB-40W-UNI-24VDC
39	39.4	16	PSB-40W-UNI-24VDC	24	PSB-40W-UNI-24VDC	32	PSB-40W-UNI-24VDC
41	41.8	17	PSB-40W-UNI-24VDC	26	PSB-40W-UNI-24VDC	34	PSB-40W-UNI-24VDC
44	44.2	18	PSB-40W-UNI-24VDC	28	PSB-40W-UNI-24VDC	37	PSB-40W-UNI-24VDC
46	46.6	19	PSB-40W-UNI-24VDC	29	PSB-40W-UNI-24VDC	38	PSB-40W-UNI-24VDC
48	49	20	PSB-40W-UNI-24VDC	30	PSB-40W-UNI-24VDC	40	PSB-60W-UNI-24VDC
51	51.4	21	PSB-40W-UNI-24VDC	32	PSB-40W-UNI-24VDC	42	PSB-60W-UNI-24VDC
53	53.8	22	PSB-40W-UNI-24VDC	33	PSB-40W-UNI-24VDC	44	PSB-60W-UNI-24VDC
56	56.2	23	PSB-40W-UNI-24VDC	35	PSB-40W-UNI-24VDC	47	PSB-60W-UNI-24VDC
58	58.6	24	PSB-40W-UNI-24VDC	36	PSB-40W-UNI-24VDC	48	PSB-60W-UNI-24VDC
60	61	25	PSB-40W-UNI-24VDC	38	PSB-40W-UNI-24VDC	50	PSB-60W-UNI-24VDC
63	63.4	26	PSB-40W-UNI-24VDC	39	PSB-40W-UNI-24VDC	52	PSB-60W-UNI-24VDC
65	65.8	27	PSB-40W-UNI-24VDC	41	PSB-60W-UNI-24VDC	54	PSB-60W-UNI-24VDC
68	68.2	28	PSB-40W-UNI-24VDC	43	PSB-60W-UNI-24VDC	57	PSB-60W-UNI-24VDC
70	70.6	29	PSB-40W-UNI-24VDC	44	PSB-60W-UNI-24VDC	58	PSB-60W-UNI-24VDC
72	73	30	PSB-40W-UNI-24VDC	45	PSB-60W-UNI-24VDC	60	PSB-96W-UNI-24VDC
75	75.4	31	PSB-40W-UNI-24VDC	47	PSB-60W-UNI-24VDC	62	PSB-96W-UNI-24VDC
77	77.8	32	PSB-40W-UNI-24VDC	48	PSB-60W-UNI-24VDC	64	PSB-96W-UNI-24VDC
80	80.2	33	PSB-40W-UNI-24VDC	50	PSB-60W-UNI-24VDC	67	PSB-96W-UNI-24VDC
82	82.6	34	PSB-40W-UNI-24VDC	51	PSB-60W-UNI-24VDC	68	PSB-96W-UNI-24VDC
84	85	35	PSB-40W-UNI-24VDC	53	PSB-60W-UNI-24VDC	70	PSB-96W-UNI-24VDC
87	87.4	36	PSB-40W-UNI-24VDC	54	PSB-60W-UNI-24VDC	72	PSB-96W-UNI-24VDC
89	89.8	37	PSB-40W-UNI-24VDC	56	PSB-60W-UNI-24VDC	74	PSB-96W-UNI-24VDC
92	92.2	38	PSB-40W-UNI-24VDC	58	PSB-60W-UNI-24VDC	77	PSB-96W-UNI-24VDC
94	94.6	39	PSB-40W-UNI-24VDC	59	PSB-60W-UNI-24VDC	78	PSB-96W-UNI-24VDC
96	97	40	PSB-60W-UNI-24VDC	60	PSB-96W-UNI-24VDC	80	PSB-96W-UNI-24VDC
99	99.4	41	PSB-60W-UNI-24VDC	62	PSB-96W-UNI-24VDC	82	PSB-96W-UNI-24VDC
101	101.8	42	PSB-60W-UNI-24VDC	63	PSB-96W-UNI-24VDC	84	PSB-96W-UNI-24VDC
104	104.2	43	PSB-60W-UNI-24VDC	65	PSB-96W-UNI-24VDC	87	PSB-96W-UNI-24VDC
106	106.6	44	PSB-60W-UNI-24VDC	66	PSB-96W-UNI-24VDC	88	PSB-96W-UNI-24VDC
108	109	45	PSB-60W-UNI-24VDC	68	PSB-96W-UNI-24VDC	90	PSB-96W-UNI-24VDC
111	111.4	46	PSB-60W-UNI-24VDC	69	PSB-96W-UNI-24VDC	92	PSB-96W-UNI-24VDC
113	113.8	47	PSB-60W-UNI-24VDC	71	PSB-96W-UNI-24VDC	94	PSB-96W-UNI-24VDC
116	116.2	48	PSB-60W-UNI-24VDC	73	PSB-96W-UNI-24VDC	97	PSB-2x96W-UNI-24VDC
118	118.6	49	PSB-60W-UNI-24VDC	74	PSB-96W-UNI-24VDC	98	PSB-2x96W-UNI-24VDC
120**	121	50	PSB-60W-UNI-24VDC	75	PSB-96W-UNI-24VDC	100	PSB-2x96W-UNI-24VDC
123	123.8	51	PSB-60W-UNI-24VDC	77	PSB-96W-UNI-24VDC		
126	126.2	52	PSB-60W-UNI-24VDC	78	PSB-96W-UNI-24VDC		
128	128.6	53	PSB-60W-UNI-24VDC	80	PSB-96W-UNI-24VDC		
130	131	54	PSB-60W-UNI-24VDC	81	PSB-96W-UNI-24VDC		
133	133.4	55	PSB-60W-UNI-24VDC	83	PSB-96W-UNI-24VDC		
135	135.8	56	PSB-60W-UNI-24VDC	84	PSB-96W-UNI-24VDC		
138	138.2	57	PSB-60W-UNI-24VDC	86	PSB-96W-UNI-24VDC		
140	140.6	58	PSB-60W-UNI-24VDC	87	PSB-96W-UNI-24VDC		
142	143	59	PSB-60W-UNI-24VDC	89	PSB-96W-UNI-24VDC		
145	145.4	60	PSB-96W-UNI-24VDC				
147	147.8	61	PSB-96W-UNI-24VDC				
149	150.2	62	PSB-96W-UNI-24VDC				
152	152.6	63	PSB-96W-UNI-24VDC				
154	155	64	PSB-96W-UNI-24VDC				
157	157.4	65	PSB-96W-UNI-24VDC				
159	159.8	66	PSB-96W-UNI-24VDC				
162	162.2	67	PSB-96W-UNI-24VDC				
164	164.6	68	PSB-96W-UNI-24VDC				
166	167	69	PSB-96W-UNI-24VDC				

**Maximum Shipping Length

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

Length Chart: Actual lengths for Cirrus Ceiling Wall Wash with Glare Shield

STATIC WHITE							
Ordering Code (Nominal Size)	Actual Length (Inches)	5W (4.4 Watts)	Power Supply	Ordering Code (Nominal Size)	Actual Length (Inches)	5W (4.4 Watts)	Power Supply
169	169.4	70	PSB-96W-UNI-24VDC	207	207.8	86	PSB-96W-UNI-24VDC
171	171.8	71	PSB-96W-UNI-24VDC	210	210.2	87	PSB-96W-UNI-24VDC
174	174.2	72	PSB-96W-UNI-24VDC	212	212.6	88	PSB-96W-UNI-24VDC
176	176.6	73	PSB-96W-UNI-24VDC	214	215	89	PSB-96W-UNI-24VDC
178	179	74	PSB-96W-UNI-24VDC	217	217.4	90	PSB-96W-UNI-24VDC
181	181.4	75	PSB-96W-UNI-24VDC	219	219.8	91	PSB-96W-UNI-24VDC
183	183.8	76	PSB-96W-UNI-24VDC	222	222.2	92	PSB-96W-UNI-24VDC
186	186.2	77	PSB-96W-UNI-24VDC	224	224.6	93	PSB-96W-UNI-24VDC
188	188.6	78	PSB-96W-UNI-24VDC	226	227	94	PSB-96W-UNI-24VDC
190	191	79	PSB-96W-UNI-24VDC	229	229.4	95	PSB-96W-UNI-24VDC
193	193.4	80	PSB-96W-UNI-24VDC	231	231.8	96	PSB-96W-UNI-24VDC
195	195.8	81	PSB-96W-UNI-24VDC	234	234.2	97	PSB-2x96W-UNI-24VDC
198	198.2	82	PSB-96W-UNI-24VDC	236	236.6	98	PSB-2x96W-UNI-24VDC
200	200.6	83	PSB-96W-UNI-24VDC	238	239	99	PSB-2x96W-UNI-24VDC
202	203	84	PSB-96W-UNI-24VDC	240	240.4	100	PSB-2x96W-UNI-24VDC
205	205.4	85	PSB-96W-UNI-24VDC				

WARM DIM							
Ordering Code (Nominal Size)	Actual Length (Inches)	5W (5 Watts)	Power Supply	Ordering Code (Nominal Size)	Actual Length (Inches)	5W (5 Watts)	Power Supply
12	13	5	PSB-40W-UNI-24VDC	130	130.4	54	PSB-60W-UNI-24VDC
15	16	6	PSB-40W-UNI-24VDC	133	133.4	55	PSB-60W-UNI-24VDC
18	19	8	PSB-40W-UNI-24VDC	136	136.4	56	PSB-60W-UNI-24VDC
21	22	9	PSB-40W-UNI-24VDC	139	139.4	58	PSB-60W-UNI-24VDC
24	25	10	PSB-40W-UNI-24VDC	142	142.4	59	PSB-60W-UNI-24VDC
27	28	11	PSB-40W-UNI-24VDC	145	145.4	60	PSB-96W-UNI-24VDC
30	31	13	PSB-40W-UNI-24VDC	148	148.4	61	PSB-96W-UNI-24VDC
33	34	14	PSB-40W-UNI-24VDC	151	151.4	63	PSB-96W-UNI-24VDC
36	37	15	PSB-40W-UNI-24VDC	154	154.4	64	PSB-96W-UNI-24VDC
39	40	16	PSB-40W-UNI-24VDC	157	157.4	65	PSB-96W-UNI-24VDC
42	43	18	PSB-40W-UNI-24VDC	160	160.4	66	PSB-96W-UNI-24VDC
45	46	19	PSB-40W-UNI-24VDC	163	163.4	68	PSB-96W-UNI-24VDC
48	49	20	PSB-40W-UNI-24VDC	166	166.4	69	PSB-96W-UNI-24VDC
51	52	21	PSB-40W-UNI-24VDC	169	169.4	70	PSB-96W-UNI-24VDC
54	55	23	PSB-40W-UNI-24VDC	172	172.4	71	PSB-96W-UNI-24VDC
57	58	24	PSB-40W-UNI-24VDC	175	175.4	73	PSB-96W-UNI-24VDC
60	61	25	PSB-40W-UNI-24VDC	178	178.4	74	PSB-96W-UNI-24VDC
63	64	26	PSB-40W-UNI-24VDC	181	181.4	75	PSB-96W-UNI-24VDC
66	67	28	PSB-40W-UNI-24VDC	184	184.4	76	PSB-96W-UNI-24VDC
69	70	29	PSB-40W-UNI-24VDC	187	187.4	78	PSB-96W-UNI-24VDC
72	73	30	PSB-40W-UNI-24VDC	190	190.4	79	PSB-96W-UNI-24VDC
75	76	31	PSB-40W-UNI-24VDC	193	193.4	80	PSB-96W-UNI-24VDC
78	79	33	PSB-40W-UNI-24VDC	196	196.4	81	PSB-96W-UNI-24VDC
81	82	34	PSB-40W-UNI-24VDC	199	199.4	83	PSB-96W-UNI-24VDC
84	85	35	PSB-40W-UNI-24VDC	202	202.4	84	PSB-96W-UNI-24VDC
87	88	36	PSB-40W-UNI-24VDC	205	205.4	85	PSB-96W-UNI-24VDC
90	91	38	PSB-40W-UNI-24VDC	208	208.4	86	PSB-96W-UNI-24VDC
93	94	39	PSB-40W-UNI-24VDC	211	211.4	88	PSB-96W-UNI-24VDC
96	97	40	PSB-60W-UNI-24VDC	214	214.4	89	PSB-96W-UNI-24VDC
99	100	41	PSB-60W-UNI-24VDC	217	217.4	90	PSB-96W-UNI-24VDC
102	103	43	PSB-60W-UNI-24VDC	220	220.4	91	PSB-96W-UNI-24VDC
105	106	44	PSB-60W-UNI-24VDC	223	223.4	93	PSB-96W-UNI-24VDC
108	109	45	PSB-60W-UNI-24VDC	226	226.4	94	PSB-96W-UNI-24VDC
111	112	46	PSB-60W-UNI-24VDC	229	229.4	95	PSB-96W-UNI-24VDC
114	115	48	PSB-60W-UNI-24VDC	232	232.4	96	PSB-96W-UNI-24VDC
117	118	49	PSB-60W-UNI-24VDC	235	235.4	98	PSB-2x96W-UNI-24VDC
120**	121	50	PSB-60W-UNI-24VDC	238	238.4	99	PSB-2x96W-UNI-24VDC
124	124.4	51	PSB-60W-UNI-24VDC	240	240.4	100	PSB-2x96W-UNI-24VDC
127	127.4	53	PSB-60W-UNI-24VDC				

**Maximum Shipping Length


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

REV 05.22.24

DRAWINGS Drawings are shown with 2" Round Canopy, 2" Square Canopy, 4" Round Canopy, and 4" Square Canopy

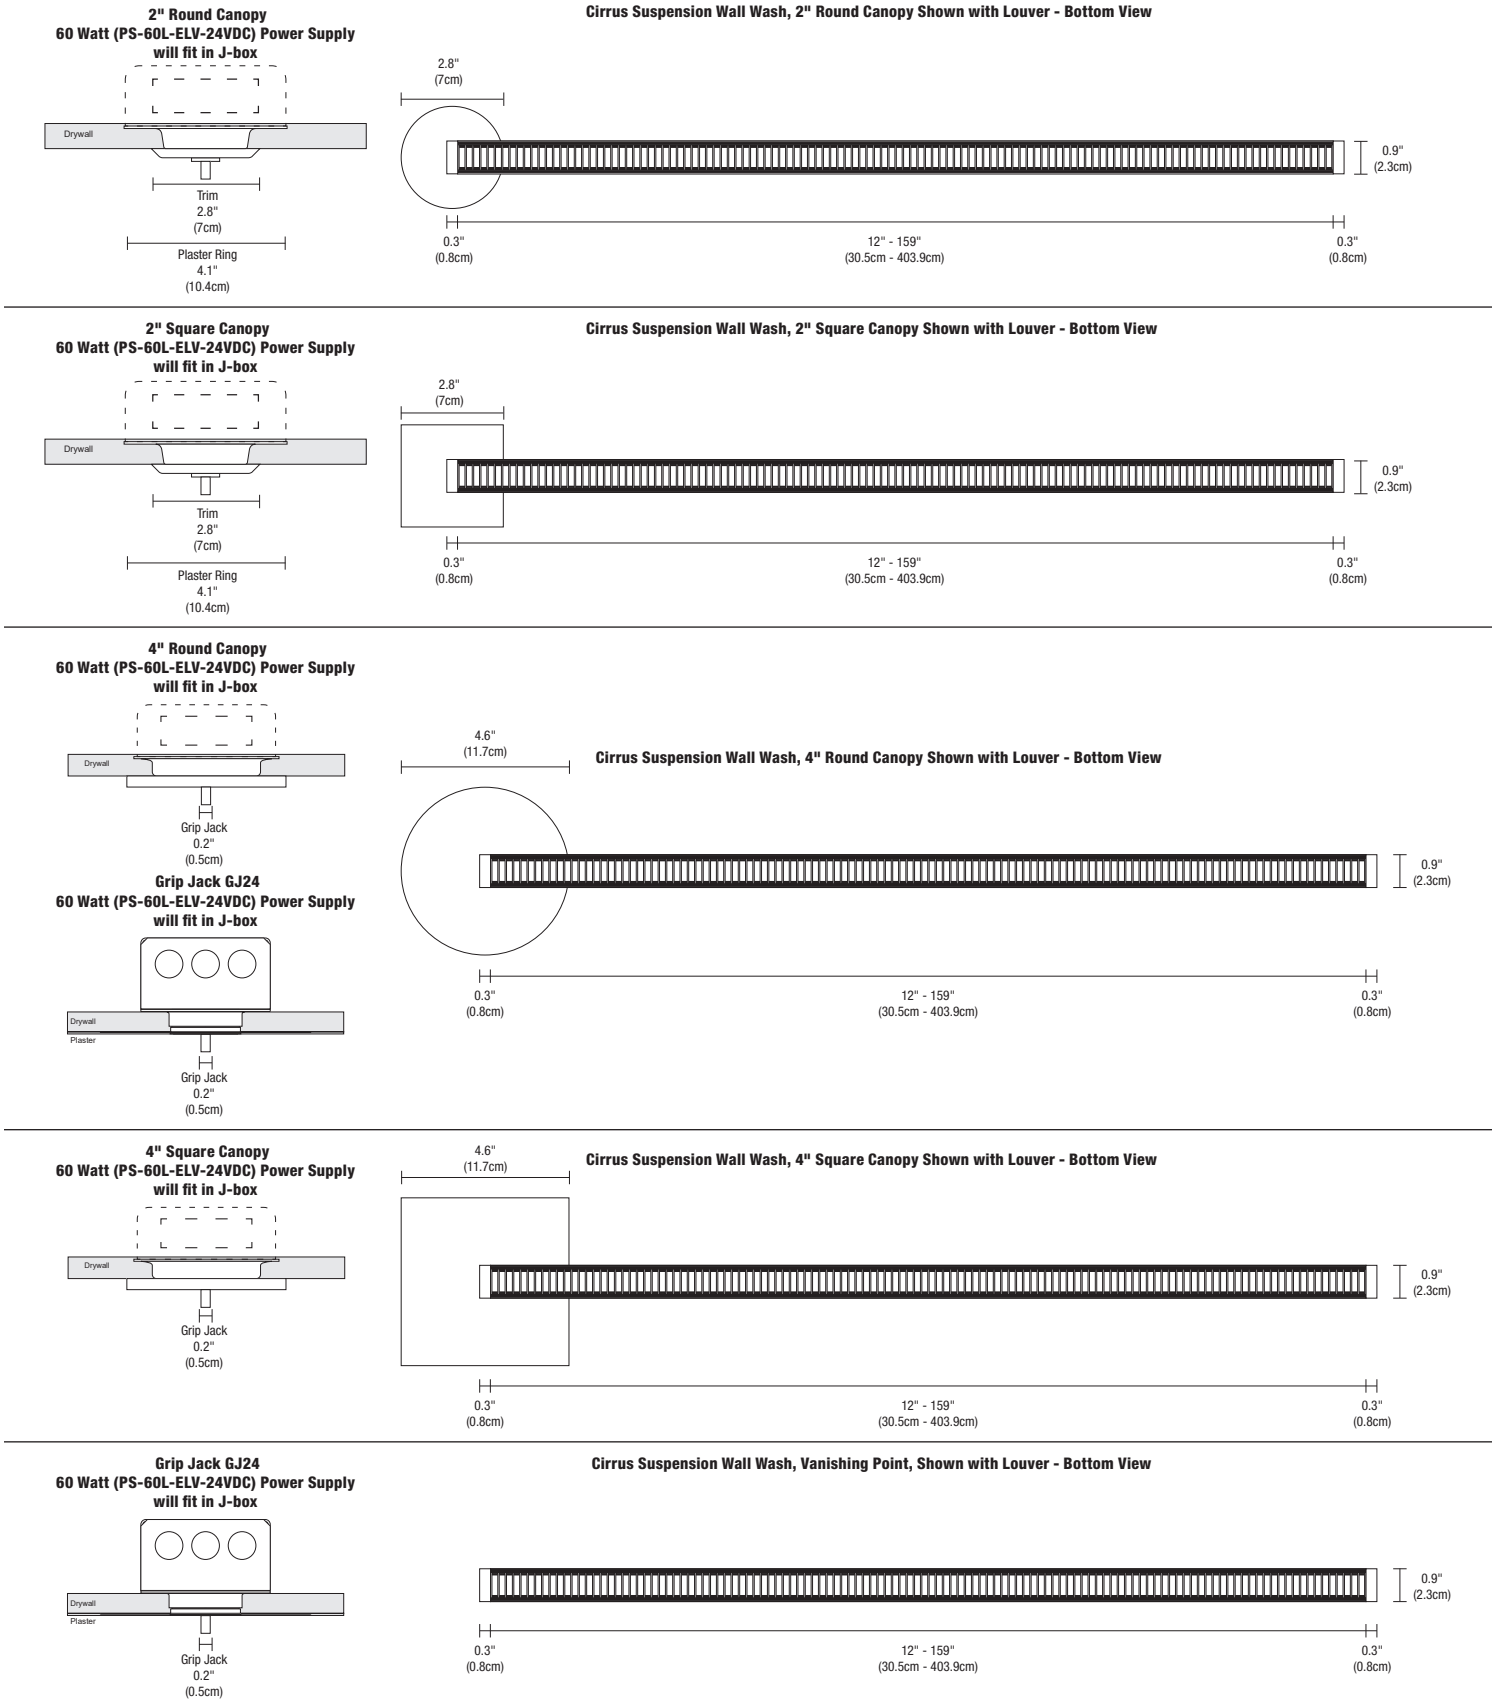


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD PURE

24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM


REMOTE POWER CANOPIES

The 2" Round and Square Canopy includes a NC2-JBOX junction box cover. The 4" canopies mount to a standard 4" junction box. Vanishing point is the only truly trimless and flush design available on the market with cables that disappear into the ceiling. Refer to the [Vanishing Point specification](#) for details and requirements including millwork options.

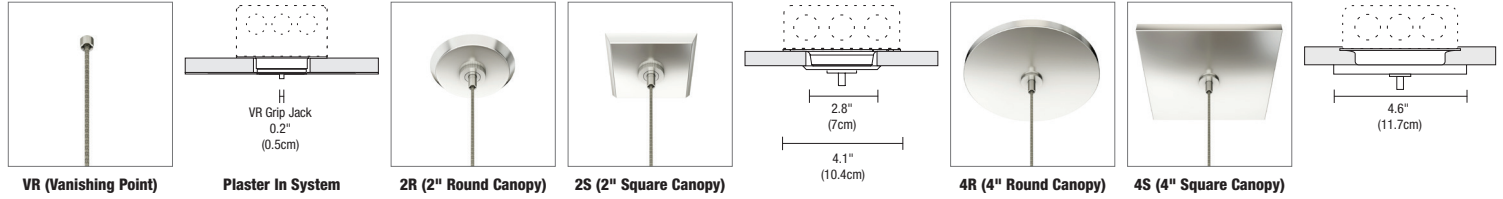


NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

The New Construction NC2-JBOX cover is included with the 2" Round and Square canopies and is not required for the 4" square canopies. The NC2 cover mounts to a standard 4" junction or octagon box accommodating the 2" Plaster Ring for use with the 2R and 2S canopies. The Remodel RM2-JBOX plaster plate cover must be used with the supplied PureEdge junction box.


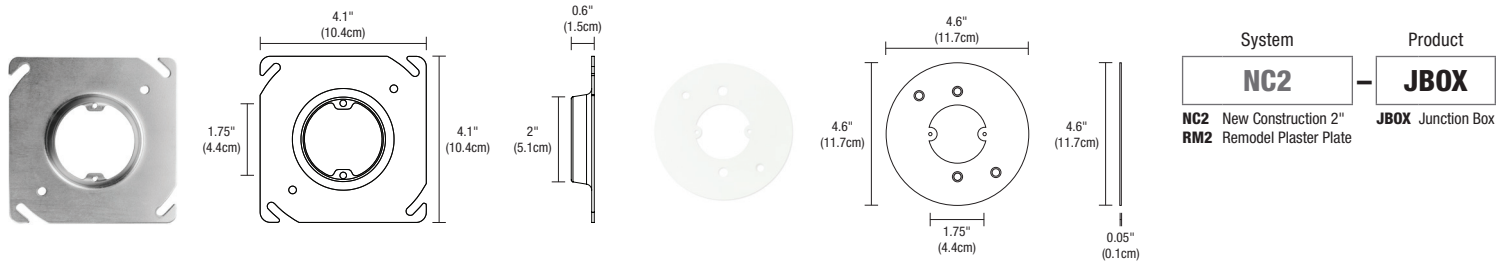


ACCESSORIES Additional components may be required based on lighting design and application.

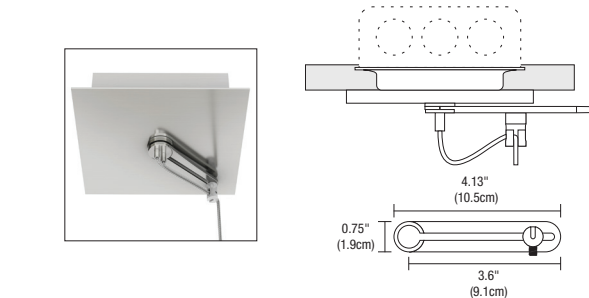



CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, 2S, 4R and 4S Power Canopies (Canopy not included).

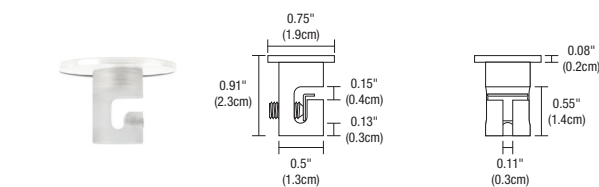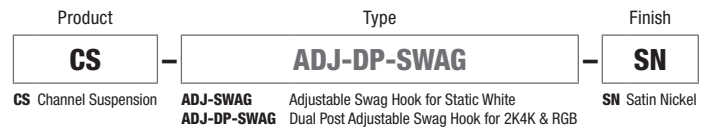


CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

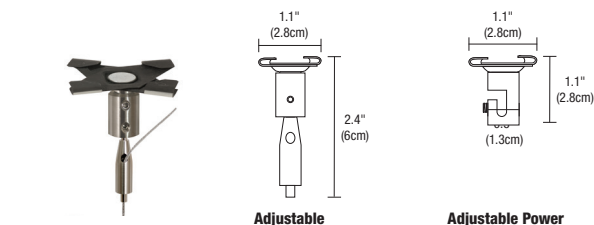

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP


Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Adjustable is offered in Satin Nickel, Clear plastic for Adjustable Power.

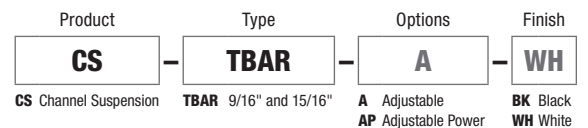

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CIRRUS SUSPENSION WALL WASH WITH GLARE SHIELD PURE 24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

DRAWINGS Side View shown with Vanishing Point, 2" and 4" Canopies

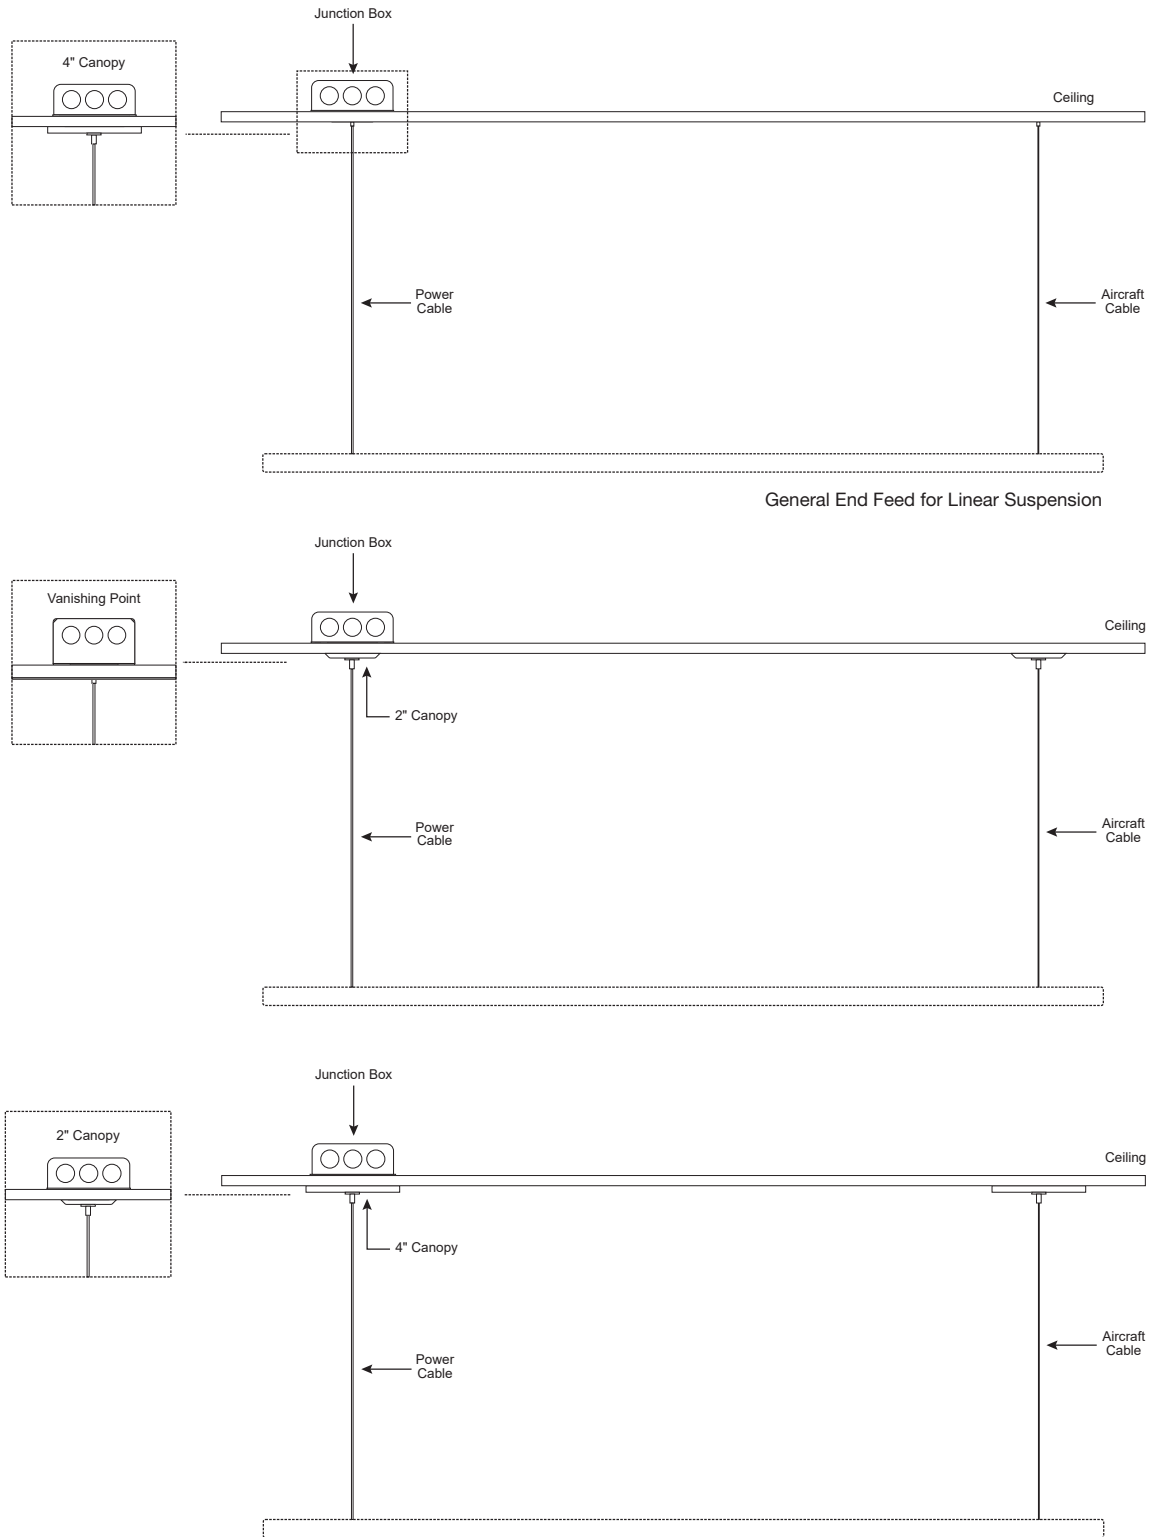

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

TM30 DATA


24VDC REMOTE POWER END FEED, STATIC WHITE & WARM DIM

REV 05.22.24

TM-30-15 DATA: The data below is for SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




Test Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




Test Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




Test Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



Test Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--