



DESCRIPTION

The Flow Pipe TruColor™ Suspension features a 360 Flex LED seamlessly wrapped around a decorative pipe, allowing you to experiment with various configurations for a range of unique and dynamic designs. Designed for flexibility across minimal, transitional, and contemporary environments, it offers a broad range of finish and mounting options to complement any aesthetic. Cora Weave introduces a tactile dimension, showcasing a woven textile sleeve within a transparent housing and delivering seamless, omnidirectional illumination. Make the design your own, by pushing the extra flex into the ends of the pipe up to 12" on each end. Available in **TruColor™ RGBTW** Dynamic RGB with Tunable White 1500K-6500K. Powered by a 24VDC remote power supply (ordered separately) that can be located up to 40' away. Fixture includes a 5-year pro-rated warranty. For custom lengths, finishes, designs, and quotes send drawings to design@PureEdgeLighting.com.

INSTALLATION

- Pre-wired for a Remote Power Supply feeding 24VDC, 96 watts up to 40' away using #12 Gauge Wire
- Includes adjustable 12' 24V coaxial cable & two aircraft cables.

FINISHES



LENS

- Cora Weave - 360°, 1" diameter lens with a woven texture

LAMPING

- TruColor™ RGBTW Red, Green, and Blue with Tunable White (1500K-6500K)
- 5W 147lm/ft 5W5 @3000K
- Designer-grade Color Rendering 94+ CRI
- 50,000 Hour Lamp Life

REMOTE 96W POWER SUPPLIES (ORDER SEPARATELY)

24VDC, Class 2 wiring


- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies & Smart Controls](#)
- [DMX to WiZ Interface, Power Supply & Controls](#)

APPLICATIONS

Designed for indoor use only. Ideal environments include commercial, architectural and retail spaces in addition to offices, conference rooms, entrance halls and lobbies.

APPROVALS

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed. Assembled in America.

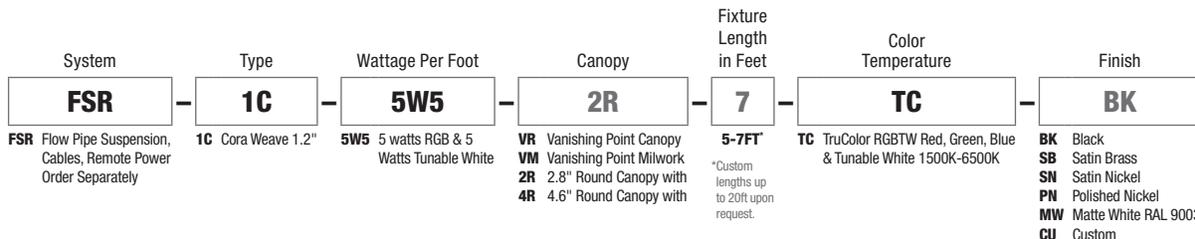



FLOW PIPE SUSPENSION RGBTW

24VDC, REMOTE POWER, CENTER FEED



PROJECT
FIXTURE TYPE
DATE

REV 01.08.26


NOMINAL DELIVERED LUMENS

DESCRIPTION	5W5 5W RGB & 5W TUNABLE WHITE									
	5W Maximum									
WATTS PER FOOT										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	
LUMENS PER FOOT (lm/ft)	112	126	131	139	145	155	158	127	119	
LUMENS PER WATT (lm/w)	21	25	27	32	34	34	33	32	40	
CRI	92	94	95	95	96	97	97	92	90	
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	
Rf	91	93	94	94	95	94	94	92	90	
Rg	105	101	103	105	104	102	100	102	103	
R9	90	90	90	94	97	97	91	81	70	
R13	92	94	95	95	94	96	99	90	87	
R15	99	99	99	98	97	97	97	89	85	
WATTS/FOOT	5.3	5	4.8	4.4	4.3	4.5	4.8	4	3	

LENS OPTIONS




1C Cora Weave




360° LENS
(Flexible, Illuminated)

DRAWINGS

7' Fixture Length Diagrams Shown Below

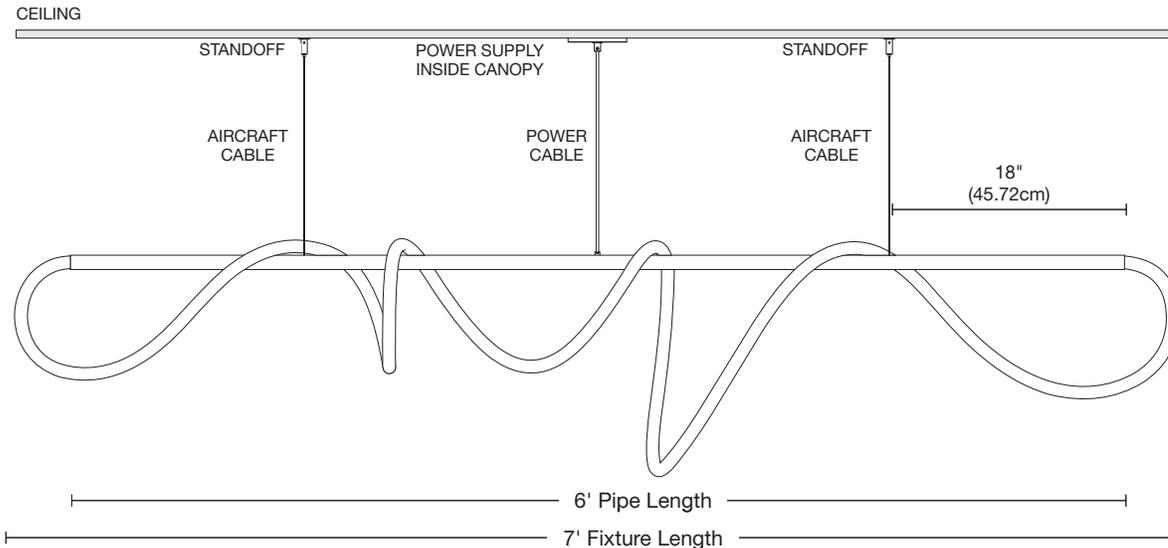


STRAIGHT PIPE
(Rigid, Not Illuminated)



FIXTURE LENGTH (IN FT)	FIXTURE WEIGHT (IN LBS)
5	6
6	7
7	7


WIRING DIAGRAM

TruColor Unity Gateway and Intelligent Logic with Power Supply

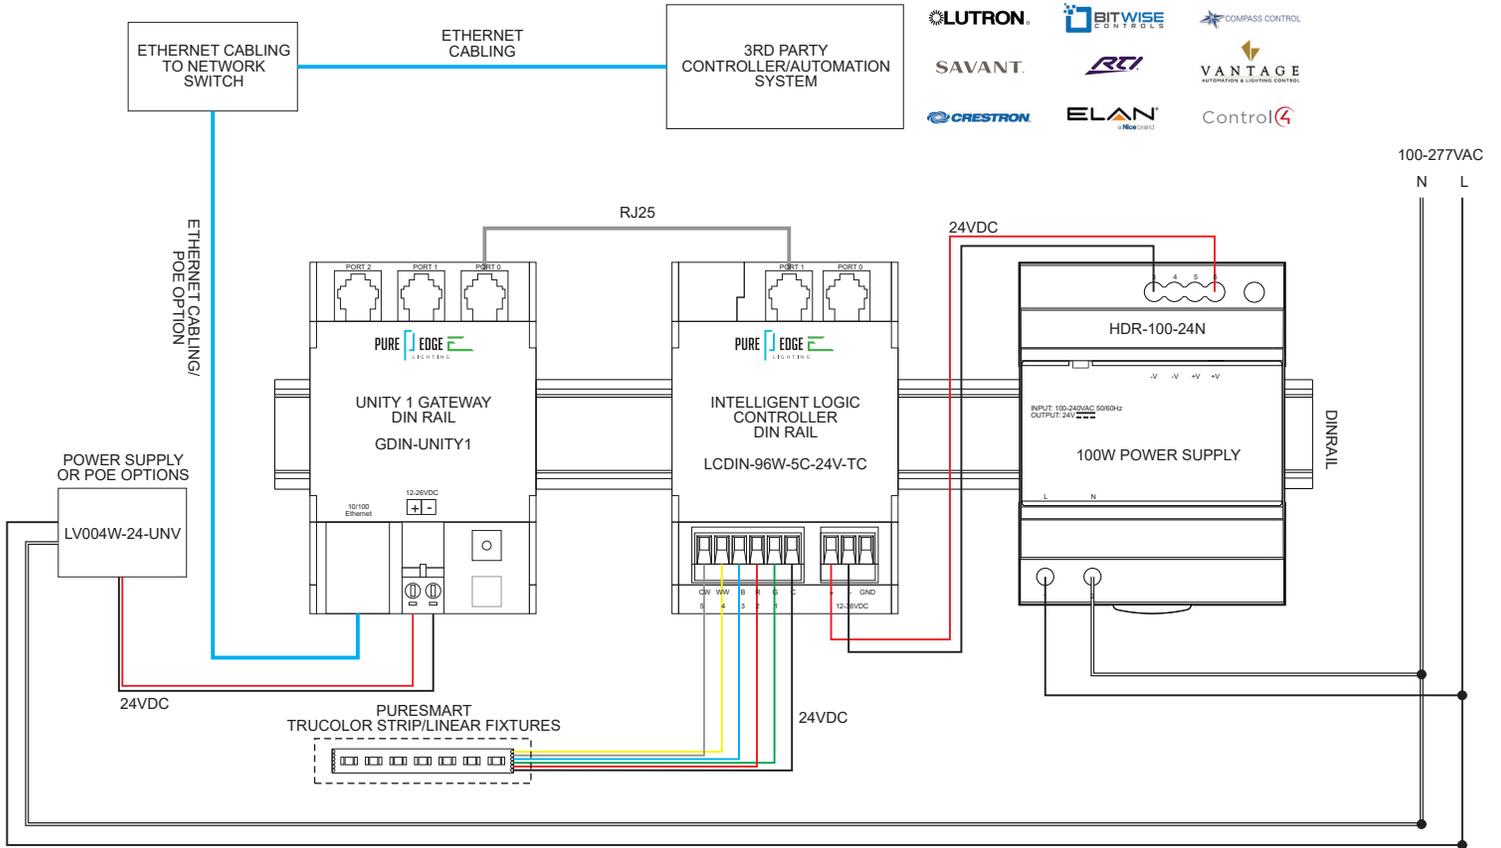


REMOTE POWER CANOPIES

The 2" Round and Square Canopy includes a NC2-JBOX junction box cover. The 4" canopies mount to a standard 4" junction box. Vanishing point is the only truly trimless and flush design available on the market with cables that disappear into the ceiling. Refer to the [Vanishing Point specification](#) for details and requirements including millwork options.

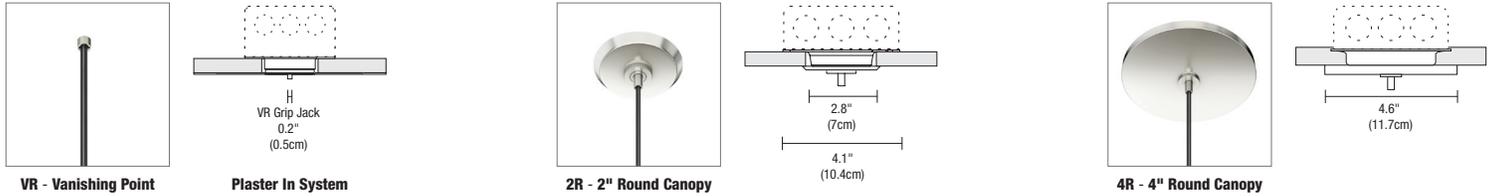


NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

The New Construction NC2-JBOX cover is included with the 2" Round and Square canopies and is not required for the 4" square canopies. The NC2 cover mounts to a standard 4" junction or octagon box accommodating the 2" Plaster Ring for use with the 2R and 2S canopies. The Remodel RM2-JBOX plaster plate cover must be used with the supplied PureEdge junction box.

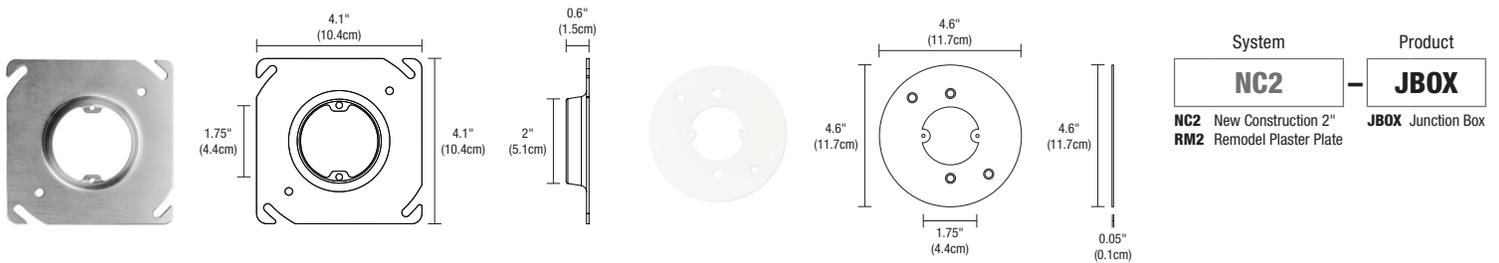


ACCESSORIES Additional components may be required based on lighting design and application.

2 Inch or 4 Inch Canopy (Not Included)

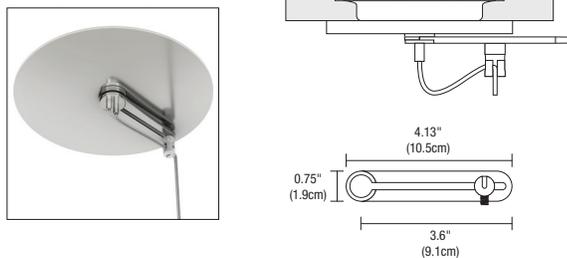



CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, 2S, 4R and 4S Power Canopies (Canopy not included).

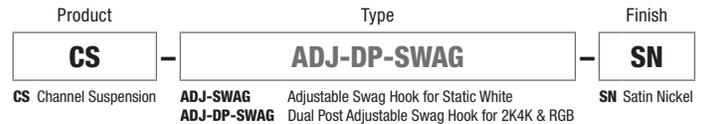



CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

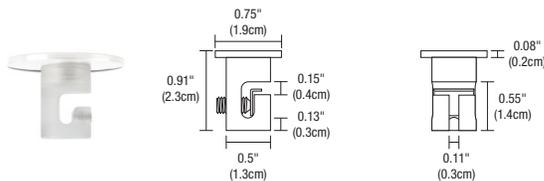

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP


Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Adjustable is offered in Satin Nickel, Clear plastic for Adjustable Power.

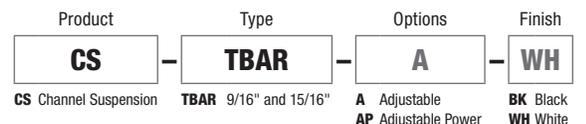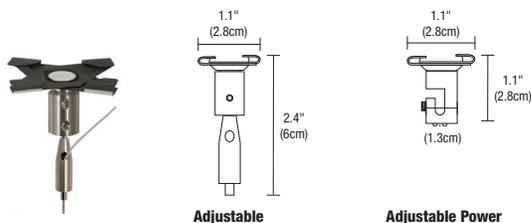

FLOW PIPE SUSPENSION RGBTW

24VDC, REMOTE POWER, CENTER FEED

DRAWINGS Drawings are shown with 4" round canopy

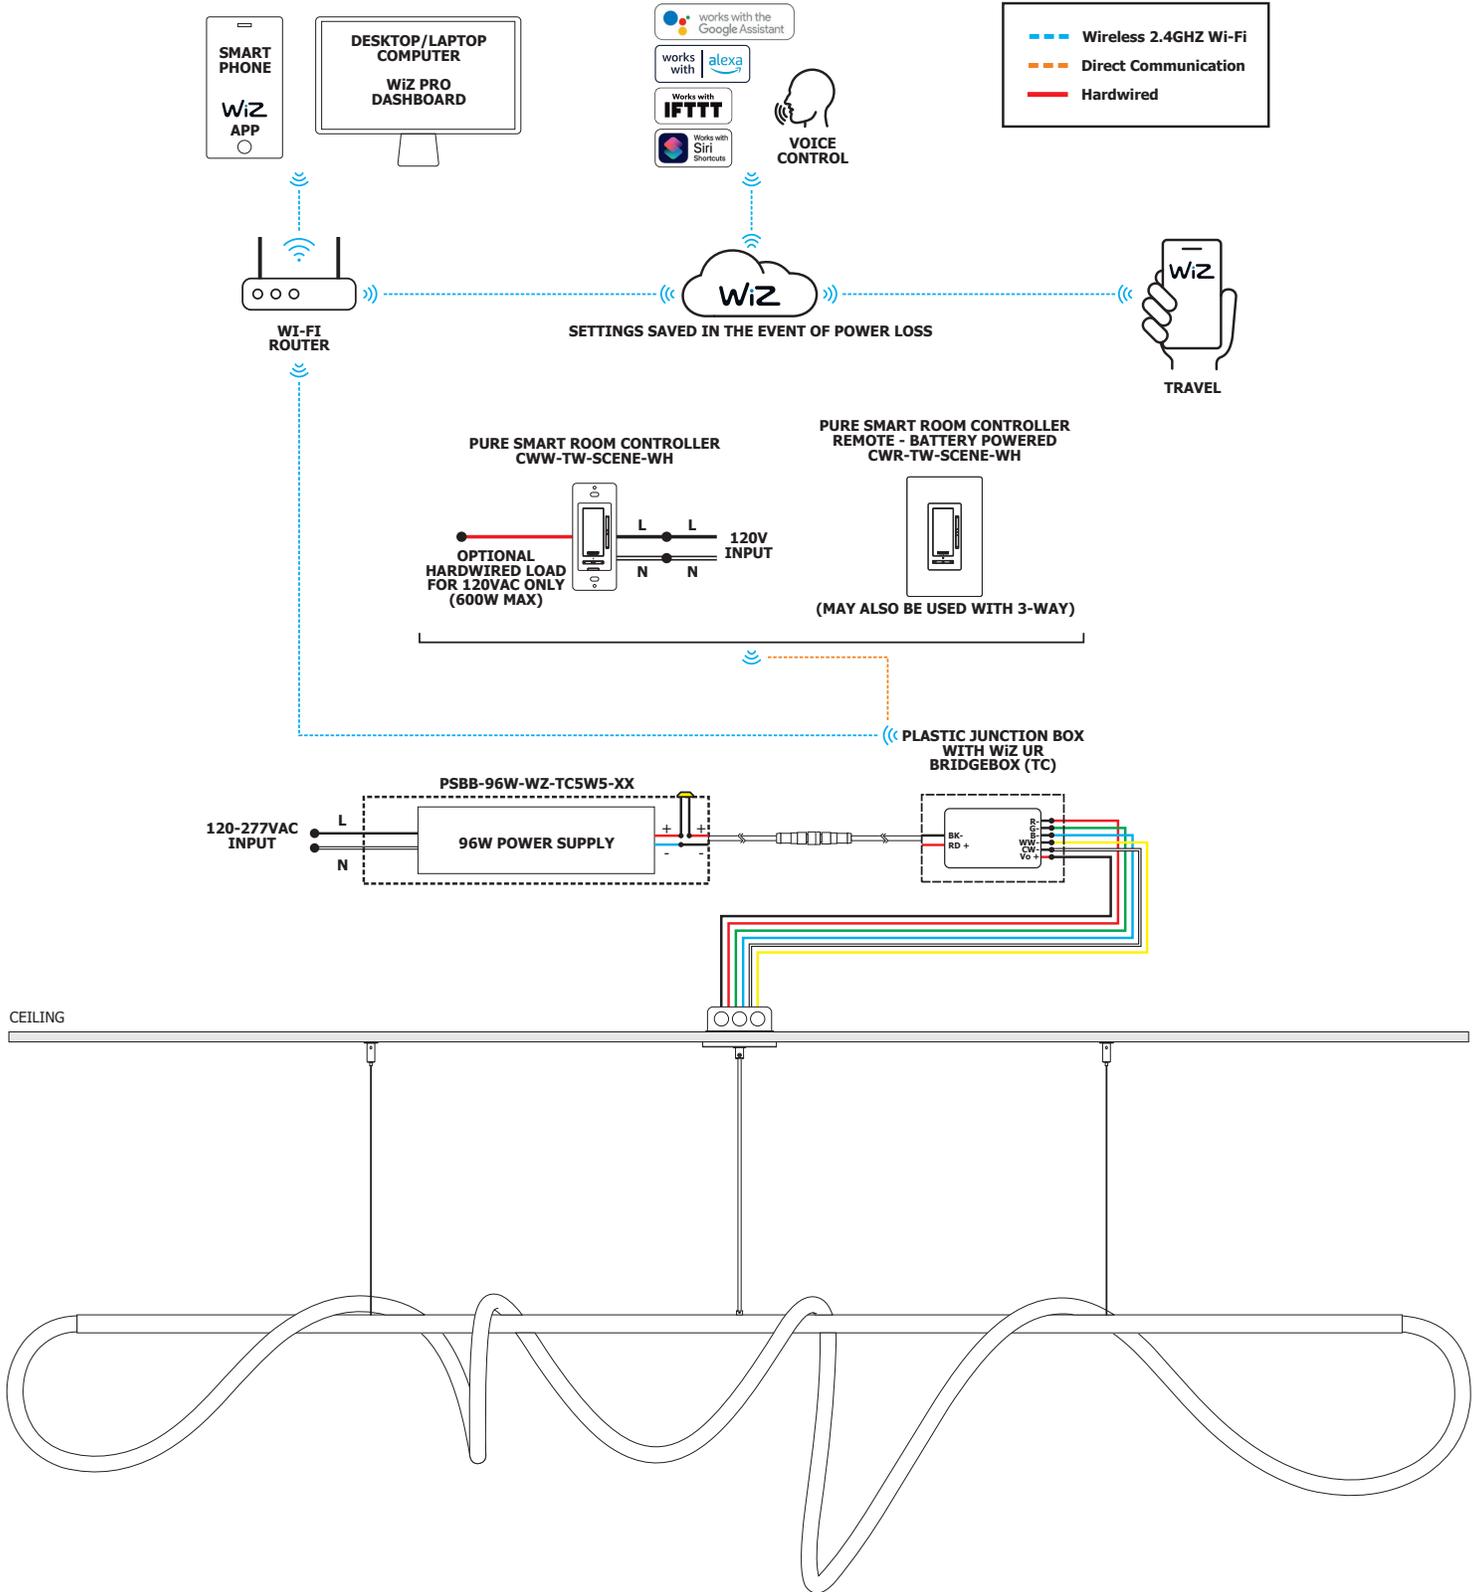


SUSPENSION TM30 DATA


24VDC, REMOTE POWER, CENTER FEED

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

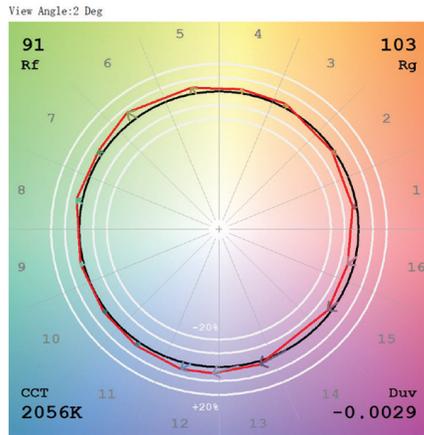


2200K (TruColor™ RGBTW)

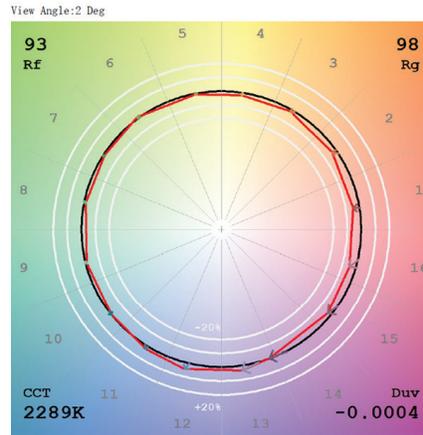


2400K (TruColor™ RGBTW)

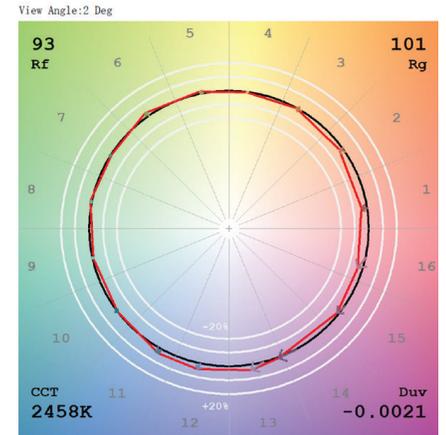


2700K (TruColor™ RGBTW)

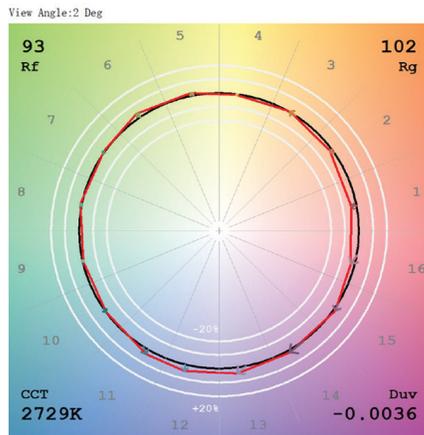


3000K (TruColor™ RGBTW)

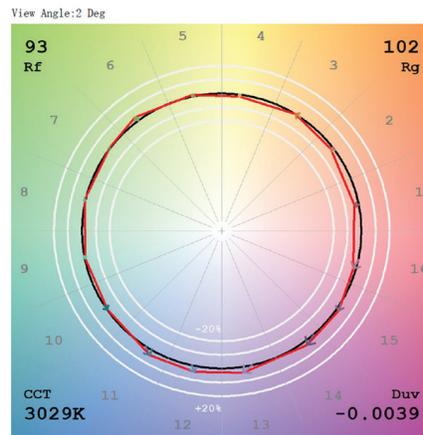


3500K (TruColor™ RGBTW)

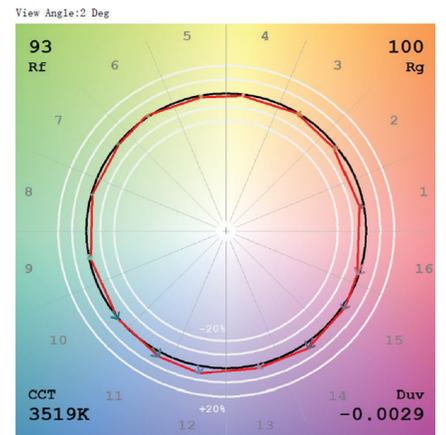

4000K (TruColor™ RGBTW)

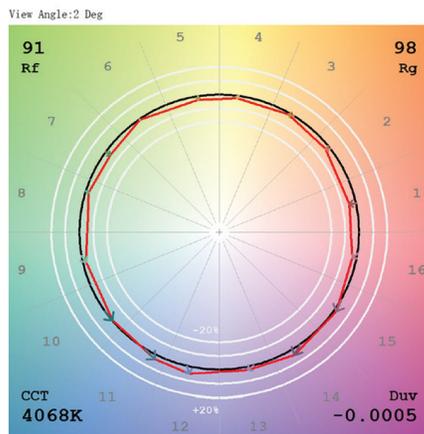

5700K (TruColor™ RGBTW)

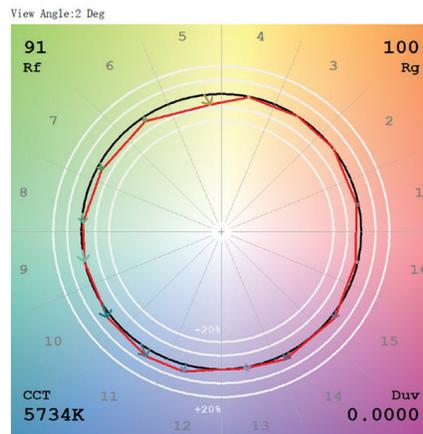

6500K (TruColor™ RGBTW)

