


MONORAIL ELECTRONIC TRANSFORMER
250W/12V SURFACE MOUNT



MTE-250L-12-SN

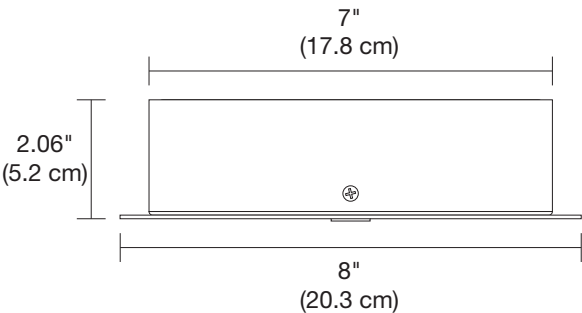

DESCRIPTION

The Surface Mount 250 Watt Electronic Transformer is used in ceilings as an alternative to remote power supply feeds and powers the Monorail from an electrical box within range of the system. The compact, lightweight transformer converts 120 volts to safe-to-touch 12 volt power. The short-circuit protected transformer can be reset at wall switch in the event of a short or overload.

Rail attaches 1" from the ceiling to one or both sides using push-in conductive connectors (included). The transformer powers a total of 250 watts. Use with 1" Rigid Standoffs.

POWER INPUT

- 120 volts AC

POWER OUTPUT

- 12 volt AC, 250 Watts

DIMMER USED

- Electronic Low Voltage Dimmer

GENERAL REQUIREMENTS

- 1" Standoff is used with the surface mount transformer

DIMENSIONS

- 8" (Ø) x 2.06" (H)
(20.3cm x 5.2cm)

FINISH



Satin Nickel
SN

WEIGHT

- 4 lbs (1.8 kg)

System	Power/Voltage Output	Finish
MTE	250L-12	SN
MTE Monorail Transformer Electronic Surface Mount	250L-12 250 Watt, 12 Volt	SN Satin Nickel

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--