



MINIPOINT LED

INDOOR/OUTDOOR



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 06.18.19



MPORT-12VAC-ST-SS





MPORT-12VAC-EL-SS



LFMP-20D
20° Beam Tilt Lens
(included with Eyelid)



MPORT-12VAC-ST-SS with
Junction Cover MPORT-JC




Wall Mounting

LENGTH	FC	WIDTH
3"	36.2	6"
6"	70.6	6.5"
9"	88.5	9"
12"	47.8	9.5"

EYE LID comes with 20° Tilt Film #LFMP-20D

Beam Angle
16°

DIST.	FC	DIA.
2'	60.3	7"
4'	15.1	14"
6'	6.7	20"
8'	3.8	27"
10'	2.4	34"
12'	1.7	41"



Step Mounting

LENGTH	FC	WIDTH
3"	41	9.5"
6"	53.2	9.5"
9"	36	10"
12"	20	9"

EYE LID comes with 20° Tilt Film #LFMP-20D & Linear Spread Film #LFMP-LS (order separately)

DESCRIPTION:

Miniport LED is slim and can be recessed into a wall or floor using a Miniport junction box (sold separately, see page 2), which mounts to an octagon box or outdoor, wet-location electrical box. The fixture, with a 1 watt warm-white LED, features a 16 degree precise focus and tempered glass lens with a stainless steel, round beveled edge trim. Miniport is compatible with the TE-60L-12 power supply. The Miniport Eyelid version, which should be wall-mounted 4" from floor, includes LFMP-20D, a lens film to tilt the light beam 20 degrees. All Miniport versions include 5 year warranty.

FINISH:

Stainless Steel

LAMP SPECIFICATION:

1 Total Watts with driver, 12VAC LED, 3000K, 93 CRI Nichia Premium Chip, 47 lumens, 70% lumen maintenance based on 50,000 hours of operation

Dimming Information:



Dims with electronic low-voltage dimmer

Power Supply:

60 watt, 120 volt input, 12 volt AC output TE-60L-12


Weight:

1 lb (.45 kg)

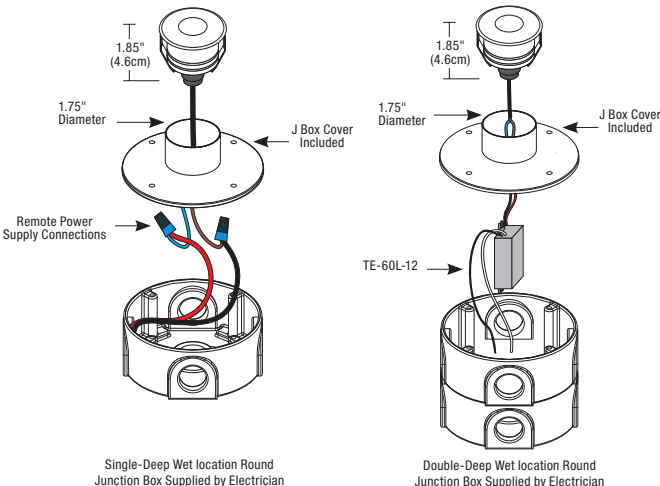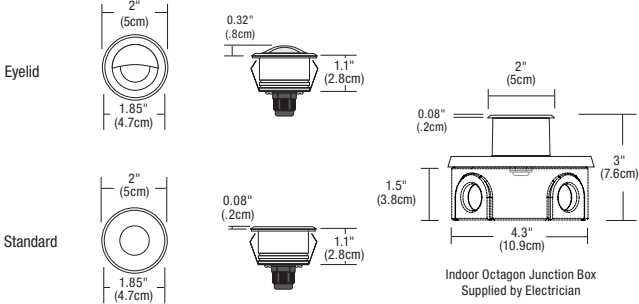

Product	Voltage	Trim	Finish
MPORT	12VAC	ST	SS
MPORT Miniport Head	12VAC 12 Volt AC	ST Surface Trim EL Eyelid	SS Stainless Steel

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

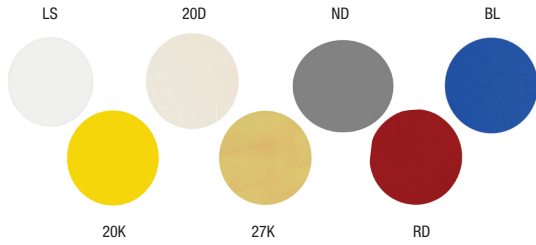

Film Lenses and Filters

Add film lenses and filters to shape beam, change color or adjust color temperatures.


Lens Film		Lens or Color
LFMP	-	20D
LFMP Lens Film Miniport		20D Refracts beam 20° down 20K Dichroic 2000K Very Warm White 27K Dichroic 2000K + Color Correction Film = 2700K ND Neutral Density Filter dims light 50% RD Red Dichroic Film BL Blue Dichroic Film LS Linear Spread



Junction Cover

Use indoor with standard octagon electrical box or use outdoor with wet location electrical box.


Product		Description
MPORT	-	JC
MPORT Miniport		JC Junction Cover



Power Supply/Driver

Power Supply (60W/12VAC) converts standard 120 volt line voltage to 12 volts and features built-in short-circuit protection. Fits inside an electrical junction box.

Product		Type		Voltage
TE	-	60L	-	12
TE Transformer Electronic		60L 60 Watt LED and halogen		12 12 Volt, AC

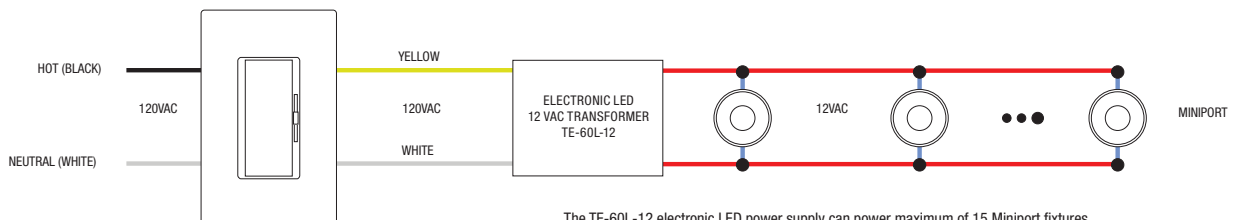

The TE-60L-12 electronic LED power supply can power maximum of 15 Miniport fixtures.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--