




NOVA SUSPENSION DOWNLIGHT

CENTER FEED, DYNAMIC TUNABLE WHITE



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 08.19.21

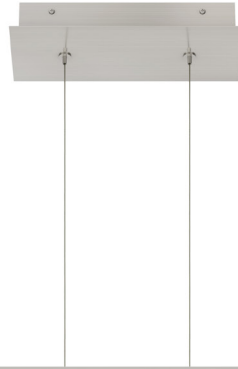

DESCRIPTION

Nova Downlight with Dynamic/Tunable White is a linear LED fixture that offers direct light in a clean and contemporary style with an architectural aesthetic. The Downlight features two lens options; a Diffused White Lens with a 100° beam spread or a Clear Frosted Lens with a 60° beam spread. Dynamic Tunable White technology grants independent control for adjusting color temperature and brightness. The **2K6K** option provides a range of 2000K (Amber) through 6500K (Cool White), ideal for residential and hospitality settings. The **27K6** option ranges from 2700K (Warm White) through 6500K (Cool White), suitable for healthcare, education, office and other commercial applications. The Nova Downlight is available in various standard lengths from 36" – 120" with several metal finishes and optional White or Black louvers for additional diffusion. Order **NSD_P** with power supplies included in the canopy or **NSD_R** remote power supplies, sold separately. Fast Jack 12V Port Canopy (**C1**) for mounting Fast Jack fixtures to easily accommodate a variety of moods and tasks. Includes 5-year pro-rated warranty. For custom lengths and quotes, email our design team at design@PureEdgeLighting.com.

INSTALLATION

- Optional Fast Jack ELV 12VAC port (**C1**) for mounting Fast Jack 12V fixtures
- Includes a 12" Linear Canopy for lengths up to 96" and a 26" linear canopy for longer lengths
- Includes adjustable 12ft coaxial cables (fixtures exceeding 84" come with additional aircraft cables)

FINISHES



LAMPING

Tunable White: 2000K-4000K. At 2700K, 294 or 558 lumens per foot. The average LED life is 60,000 hours.

ELECTRICAL

Input Voltage: 120VAC - 277VAC
 Power Consumed: 5 or 10 watts per foot
NSDP: 120V/24V 2x Uni-Drivers. Optional Fast Jack Power Supply; 12VAC electronic low voltage LED power supply.

NSDR: Remote Power Supply Options (ordered separately)
 Output Voltage: 24VDC Class 2 wiring, 2x UNIVERSAL Remote Power Supplies. Optional Fast Jack Power Supply; 12VAC electronic low voltage LED power supply, is included in Canopy.

Dimming*: Universal Dimming (TRIAC, ELV, 0-10V), Lutron Hi-Lume®, DALI, or DMX

*Dynamic/Tunable White - Requires two dimmers (one for 2000K and one for 4000K) or use our proprietary Tunable White Controller CDMX-1

APPROVALS:

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed, Made in America

APPLICATIONS

Indoor Damp Location - Human centric lighting has ideal applications in residential, commercial, retail, healthcare, hotel and hospitality environments

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
NSDP	5W	C	120	2K6K	SN
NSDP Nova Suspension Diffused Lens, with Power NSDWP Nova Suspension Diffused with White Louver, with Power NSDBP Nova Suspension Diffused with Black Louver, with Power NSCWP Nova Suspension Clear Frosted Lens with White Louver, with Power NSCBP Nova Suspension Clear Frosted Lens with Black Louver, with Power NSDR Nova Suspension Diffused lens, order Remote Power separately NSDWR Nova Suspension Diffused with White Louver, order Remote Power separately NSDBR Nova Suspension Diffused with Black Louver, order Remote Power separately NSCWR Nova Suspension Clear Frosted Lens with White Louver, order Remote Power separately NSCBR Nova Suspension Clear Frosted Lens with Black Louver, order Remote Power separately	5W 5 Watts 10W 10 Watts	C Center Feed C1 Center Feed with Fast Jack Port	36-120 Order in various increments from 36"-120" (Maximum shipping length). Maximum shipping length for Chrome is 84". <small>*See length chart on pg 2 for exact dimensions</small>	2K6K Tunable White 2000K-6500K 27K6 Tunable White 2700K-6500K	BK Satin Black CH Chrome SA Satin Aluminum SN Satin Nickel WH White


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

NOMINAL LAMP DATA Lamp data for the Nova Suspension


NSDP																																
100° Diffused White Lens																																
DESCRIPTION	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
WATTS PER FOOT	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	235	247	259	271	296	308	320	304	295	294	302	311	320	308	304	295	410	451	492	575	599	612	544	579	560	558	574	591	608	585	579	560
LUMENS PER WATT (lm/w)	59	54	56	59	64	67	80	76	75	74	76	76	75	76	75	76	51	53	56	60	65	67	68	63	70	70	62	64	66	64	63	70
CRI	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+

NSDWP																																
100° Diffused White Lens with White Louver																																
DESCRIPTION	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
WATTS PER FOOT	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	164	173	181	190	207	216	224	213	206	206	212	218	224	216	213	206	287	316	345	403	419	429	381	405	392	391	402	414	426	410	405	392
LUMENS PER WATT (lm/w)	41	38	39	41	45	47	56	53	52	52	53	53	52	52	53	52	36	37	39	42	46	47	48	44	49	49	44	45	46	45	44	49
CRI	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+


NSDBP																																
100° Diffused White Lens with Black Louver																																
DESCRIPTION	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
WATTS PER FOOT	2K6K - 5w (4.6 watts)							27K6 - 5w (4.6 watts)							2K6K - 10w (9.2 watts)							27K6 - 10w (9.2 watts)										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (lm/ft)	103	108	113	119	130	135	140	133	129	129	132	136	140	135	133	129	179	198	216	252	262	268	238	253	245	244	251	259	266	256	253	245
LUMENS PER WATT (lm/w)	26	24	25	26	28	29	35	33	33	32	33	33	33	33	33	33	22	23	24	26	29	29	30	28	31	31	27	28	29	28	28	31
CRI	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+	83+	83+	92+	92+	92+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+

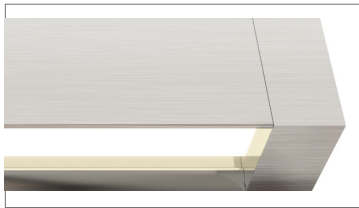

Shown without Louver

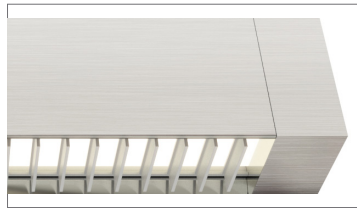

Shown with White Louver

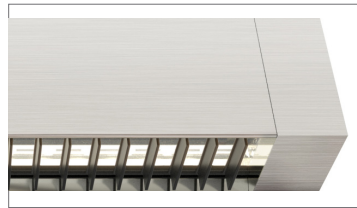


Shown with Black Louver



C1 Canopy, shown with FJ Piston in Satin Nickel (FJ Piston sold separately)


NSD_ BEAM SPREAD CHART
NSD_ 3000K 5 WATT 100°

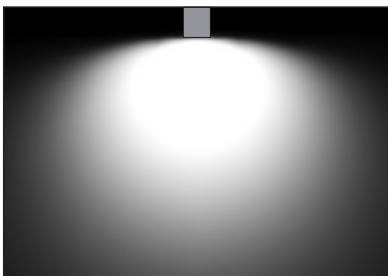

5 Watt 100°	
Distance	Foot Candles
1'	152
1.5'	100
2'	74
3'	47
4'	34
5'	25
6'	20
7'	15
8'	13

10 Watt 100°	
Distance	Foot Candles
1'	279
1.5'	183
2'	136
3'	87
4'	62
5'	47
6'	37
7'	29
8'	24

CANDLE POWER DISTRIBUTION 100°

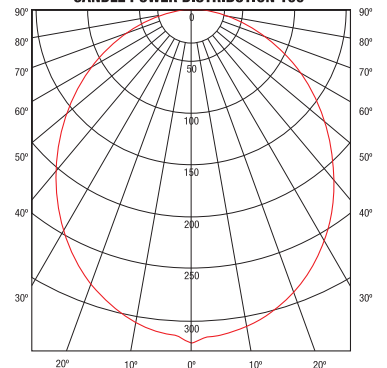

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------



NOVA SUSPENSION DOWNLIGHT

CENTER FEED, DYNAMIC TUNABLE WHITE



REV 08.19.21

LENGTH CHART Actual lengths for Nova Downlight Center Feed Tunable White

Ordering Code (Nominal Size)	5W			10W		
	Tunable @ 5W per ft.	Power Supply	DMX POWER AND CDMX CONTROLLER: YOU NEED ONE POWER SUPPLY ONLY (SEE PAGES BELOW)	Tunable @ 10W per ft.	Power Supply	DMX POWER AND CDMX CONTROLLER: YOU NEED ONE POWER SUPPLY ONLY (SEE PAGES BELOW)
36	15	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	30	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
39	16	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	32	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
41	17	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	34	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
44	18	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	37	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
46	19	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	38	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK
48	20	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	40	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
51	21	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	42	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
53	22	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	44	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
56	23	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	47	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
58	24	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	48	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
60	25	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	50	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
63	26	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	52	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
65	27	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	54	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK
68	28	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	57	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
70	29	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	58	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
72	30	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	60	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
75	31	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	62	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
77	32	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	64	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
80	33	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	67	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
82	34	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	68	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
84*	35	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	70	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
87	36	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	72	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
89	37	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	74	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
92	38	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	77	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
94	39	PSB-2x40W-UNI-24VDC	PSB-100W-24VDC-2XK	78	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
96	40	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	80	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
99	41	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	82	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
101	42	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	84	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
104	43	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	87	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
106	44	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	88	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
108	45	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	90	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
111	46	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	92	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
113	47	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	94	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
116	48	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	97	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
118	49	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	98	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK
120**	50	PSB-2x60W-UNI-24VDC	PSB-100W-24VDC-2XK	100	PSB-2x96W-UNI-24VDC	PSB-100W-24VDC-2XK

*Maximum Chrome Length **Maximum Shipping Length

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--




NOVA SUSPENSION DOWNLIGHT

CENTER FEED, DYNAMIC TUNABLE WHITE



REV 08.19.21

DRAWINGS Canopy and Channel Sizes for the Nova Suspension Downlight - Center Feed

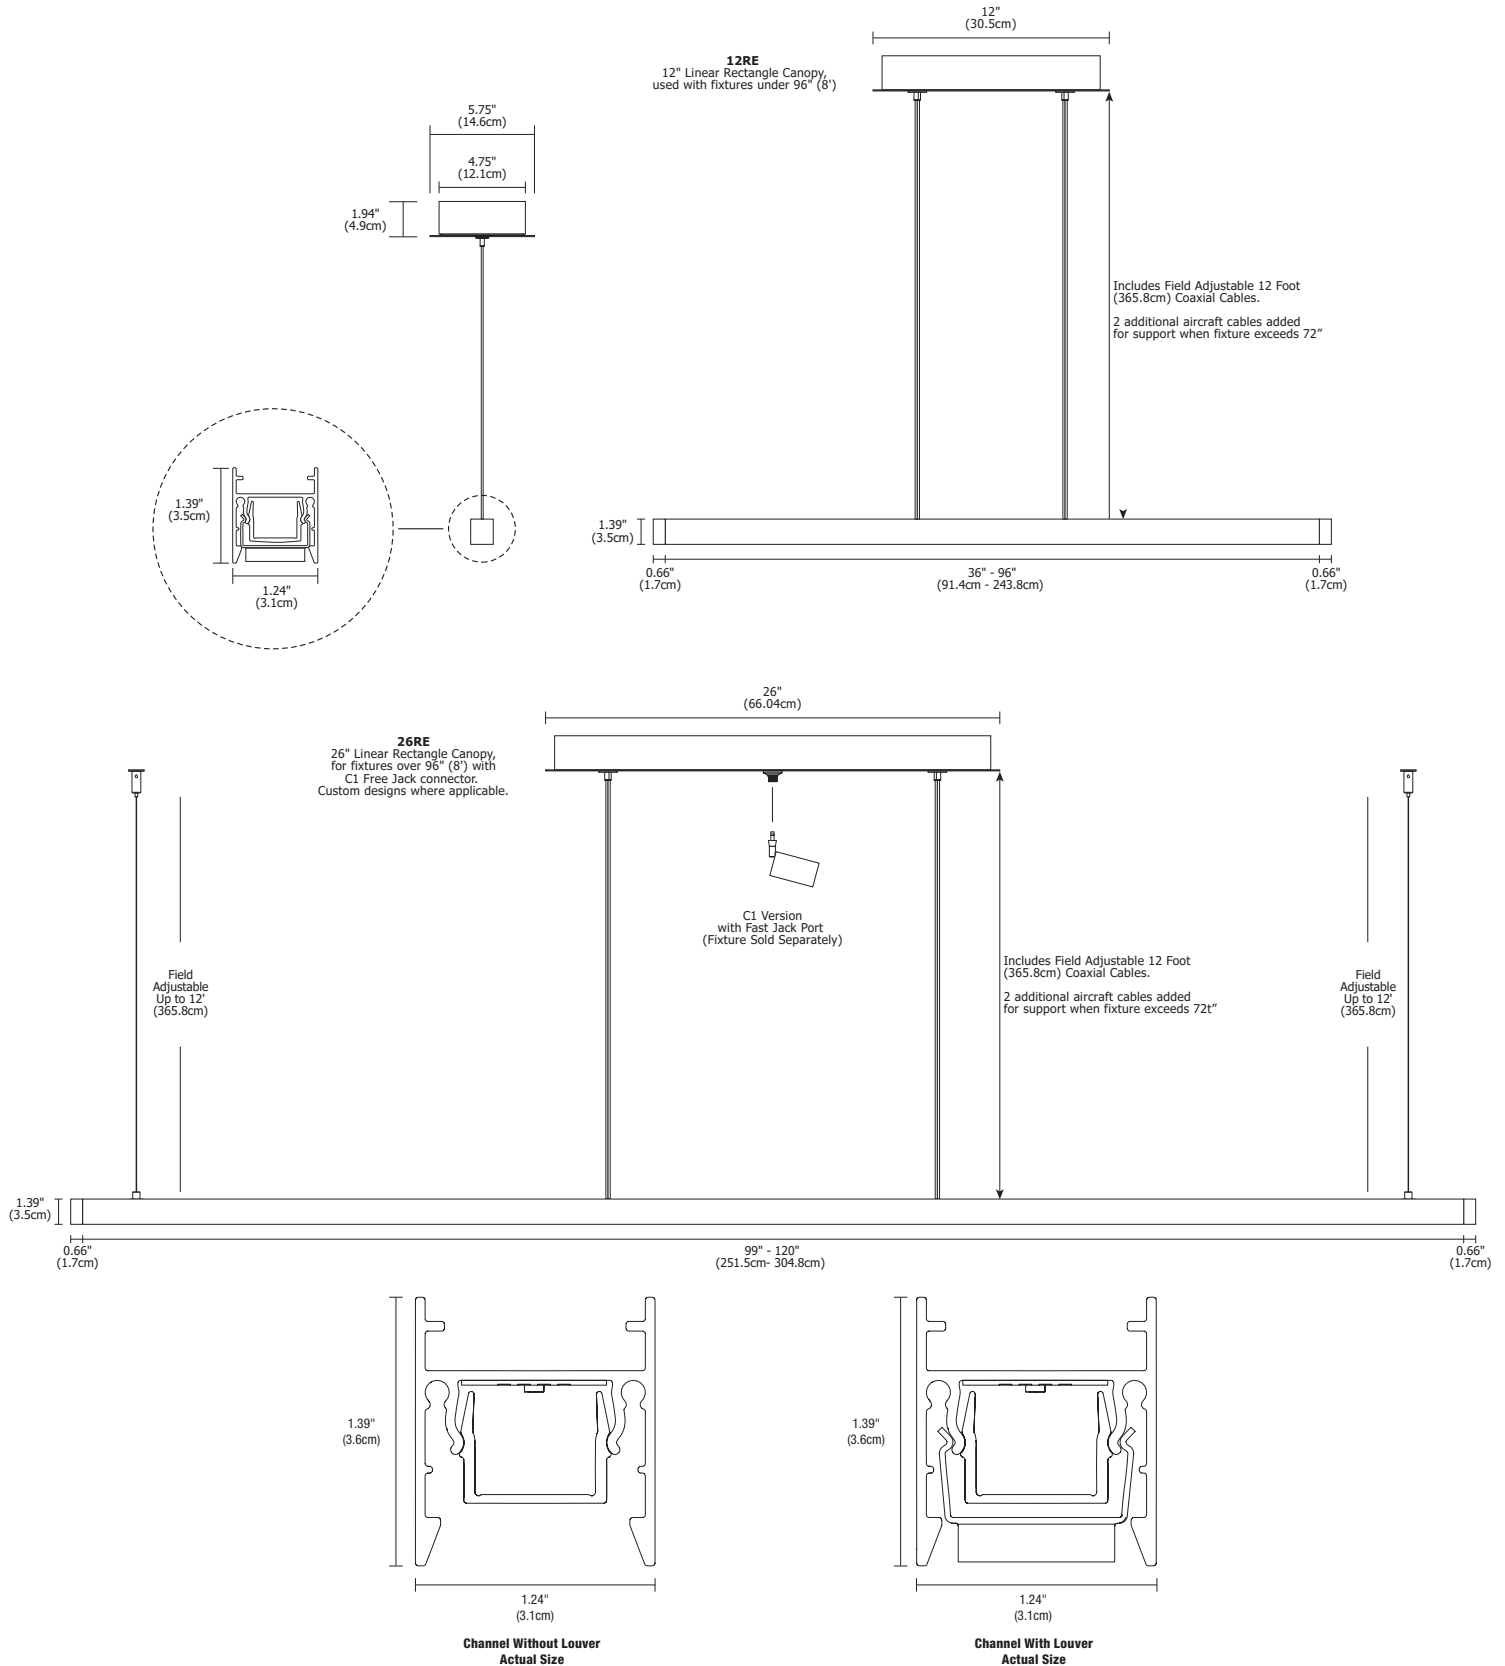


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

TUNABLE WHITE DMX CONTROLLER AND POWER SUPPLIES

24VDC INDOOR CONSTANT VOLTAGE POWER SUPPLIES WITH DRIVERS

REV 08.19.21

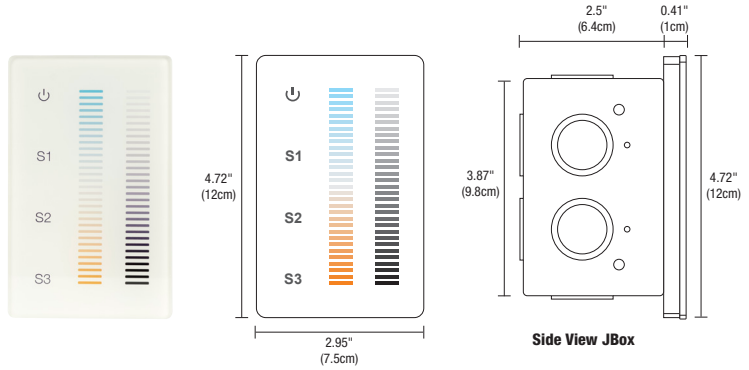

DESCRIPTION:

The Tunable White Touch Controller offers fast and accurate Color Temperature adjustment and the ability to regulate the Brightness Independently. The modern Glass faceplate features illuminated indicators, and a back-lit night light that softly illuminates the controller when powered off. Designed for Tunable White, and dual-color LED installations within a single zone. The two Vertical Touch sliders are precise and sensitive, allowing you to fine-tune your perfect Color Temperature at any point between **2000K** (Sunset) to **6500K** (Daylight White) while selecting over 250 levels of Brightness in a smooth, uninterrupted transition. Create Thousands of White Color Combinations while maintaining even Brightness and overall saturation. Easily save three pre-set scenes for different times of the day. Support health, performance, and general well-being using Human-Centric lighting by fine-tuning the biological effects that light has on the circadian cycle using the latest in LED technology. Includes a power adapter that fits behind the controller within a standard junction box and fits inside a standard single-gang receptacle (not for use in a multi-gang box). Use with an insulated, 24 AWG stranded, tinned copper wire (Belden #9841). Power Supplies are Sold Separately. Includes a 5 year pro-rated warranty.

APPLICATIONS:

Indoor

OUTPUT SIGNAL:

USITT DMX 512 (1990)

INSTALLATION:



Fits in a single gang 2.5" deep junction box. Not compatible with multi-gang boxes.

LABELS:

ROHS, FCC, Damp Location, ETL/UL

POWER INPUT:


120-240VAC

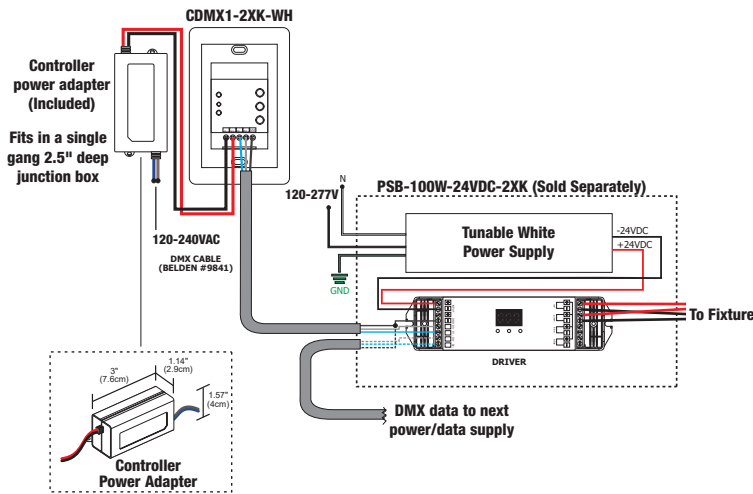

COLOR CHANGING (DMX) POWER SUPPLIES				
ORDERING CODE	PSB-100W-24VDC-2XK	PSB-2X100W-24VDC-2XK	PSB-3X100W-24VDC-2XK	PSB-4X100W-24VDC-2XK
SPECIFICATIONS				
MAXIMUM LOAD OF LED STRIP LENGTH	100W 5 WATTS - 20FT MAX. 10 WATTS - 10FT MAX.	2X100W 5 WATTS 2 X 20FT MAX. 10 WATTS - 2 X 10FT MAX.	3X100W 5 WATTS 3 X 20FT MAX. 10 WATTS - 3 X 10FT MAX.	4X100W 5 WATTS 4 X 20FT MAX. 10 WATTS - 4 X 10FT MAX.
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 6.48" X 2.18"	14" X 10" X 3"	17" X 10" X 3"	17" X 10" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-100W-24VDC-2XK-TB	PSB-2X100W-24VDC-2XK-TB	PSB-3X100W-24VDC-2XK-TB	PSB-4X100W-24VDC-2XK-TB
IN-WALL MOUNTING	PSB-100W-24VDC-2XK-IW	NA	NA	NA
DMX TUNABLE WHITE DIMMING & CONTROLS				
TUNABLE WHITE TOUCH CONTROLLER (CDMX1-2XK)	•	•	•	•


- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements

- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90

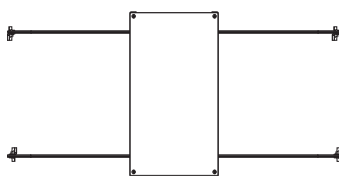

T-BAR Mounting Kit: Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4ft of 14 gauge pair Teflon cables with quick secure connectors.

Ordering Codes:
 PSB-100W-24VDC-2XK-TB
 PSB-2x100W-24VDC-2XK-TB
 PSB-3x100W-24VDC-2XK-TB
 PSB-4x100W-24VDC-2XK-TB



8.5" x 14" In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes:
 PSB-100W-24VDC-2XK-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


TM30 DATA

CENTER FEED, DYNAMIC TUNABLE WHITE

TM-30-15 DATA: The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

6500K ONLY (2K6K/27K6) | Rf: 86.8 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	86.5	-4.7%	0.8%
2	91.9	-2.5%	3.1%
3	91.2	-2.0%	1.9%
4	91.2	-1.6%	1.4%
5	85.7	-6.2%	-0.9%
6	92.9	-3.5%	-1.0%
7	92.1	-4.7%	0.7%
8	85.2	-5.8%	4.9%
9	82.8	-6.2%	14.3%
10	77.1	-0.7%	15%
11	72.1	5.8%	14.1%
12	91.6	4.0%	1.0%
13	89.9	5.6%	-2.3%
14	90.5	-1.8%	-3.7%
15	81.6	6.5%	-13.9%
16	92.8	-3.6%	-0.4%

2000K ONLY (2K6K/27K6) | Rf: 84.3 | Rg: 96.9

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%

3000K (2K6K/27K6) | Rf: 90.2 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%

4000K ONLY (2K6K/27K6) | Rf: 89.6 | Rg: 99.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

WIRING DIAGRAM Wiring Diagram for Static White with ELV Dimmer

APPLICATION ELV dimming for Cirrus Power Suspension, Center Feed Canopy with Fast Jack (C1), Static White
DIMMING Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU
 Lutron: Diva DVELV-300P, Skylark SELVz-300P, Maestro MAELV-600 and Radio Ra 2

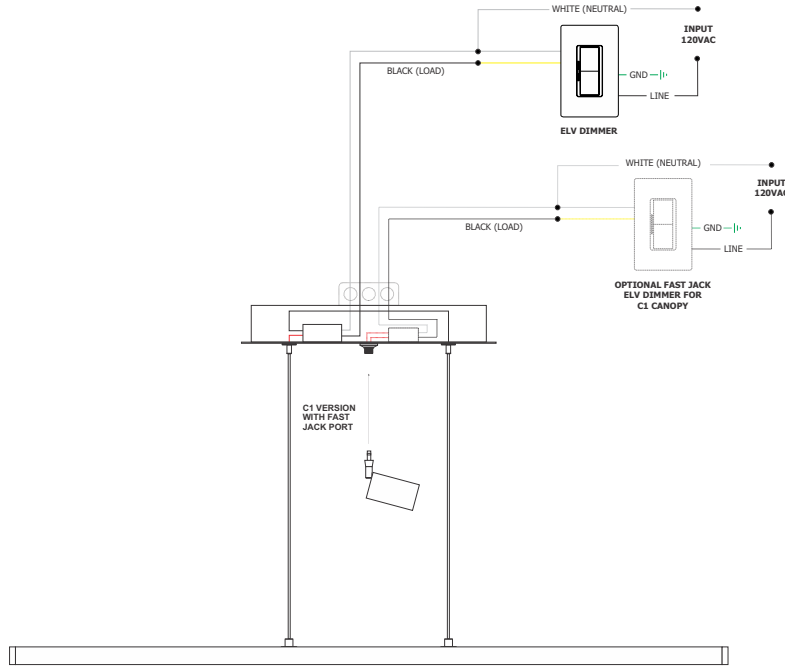

WIRING DIAGRAM Wiring Diagram for Tunable White with FJ Port, ELV Dimmers

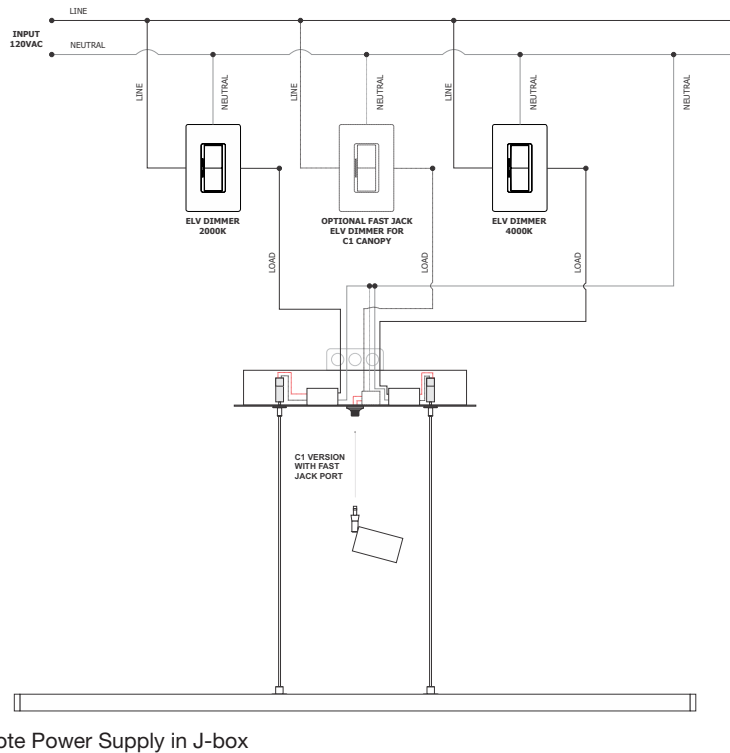

Remote Power Supply in J-box

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



NOVA SUSPENSION DOWNLIGHT

CENTER FEED, DYNAMIC TUNABLE WHITE



REV 08.19.21



FJ-SCO-1-PN
Fast Jack Scope LED
9W, 315 lumens 3000K
(adjustable beam spread
from 20°-50°)
Fixture Finishes: SN, PN, BZ, WH



FJ-PST-SP-1-30K-SN
Fast Jack Piston
9W, 650 lumens
SP 15°, NF 25°, FL 35°
& WF 45° Beam Spreads
Fixture Finishes: SN, WH




FJ-FOR-SQ-3-PN
FJ-FOR-RD-3-PN
Fast Jack Form Round or Square
Fixture Finishes: SN, PN



FJ-FOR-2RD-3-SN
FJ-FOR-2SQ-3-SN
Fast Jack Form
Round or Square 2-Head
Fixture Finishes: SN, PN



FJ-REB-1-PN
Fast Jack Rebel
Fixture Finishes: SN, PN, BZ, WH



FJ-CHO-1-SN
Fast Jack Chopper with LED
Fixture Finishes: SN, PN, BZ



FJ-SPI-3-PN with S1-PN
Fast Jack Spirit, S1 Shade
Fixture Finishes: SN, PN, BZ
S1 Shade Finishes: SN, PN, BZ, BK



FJ-LOW-1-SN with S1-SN
Fast Jack Low Rider, S1 Shade
Fixture Finishes: SN, PN, BZ
S1 Shade Finishes: SN, PN, BZ, BK

FAST JACK FIXTURE & SHADE FINISHES

SN Satin Nickel	PN Polished Nickel	BZ Antique Bronze	WH White	BK Black
------------------------	---------------------------	--------------------------	-----------------	-----------------

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

12VAC LED MR16

REV 08.19.21

SOL LIGHT WARM DIM

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	MR16-12V-8W-FL-27KWDH-SL	8	97+	85	36	30,000	2700K dims to 1800K	390	50	12V	Low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-FL-30KWDH-SL	8	97+	85	36	30,000	3000K dims to 1800K	427	55	12V	Low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-NF-27KWDH-SL	8	97+	85	24	30,000	2700K dims to 1800K	410	53	12V	Low flicker <1% CE, UL, NOM	50
	MR16-12V-8W-NF-30KWDH-SL	8	97+	85	24	30,000	3000K dims to 1800K	450	58	12V	Low flicker <1% CE, UL, NOM	50

SORAA BRILLIANT HIGH LUMEN 2700K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-827-H1*	8	90	80	10	35,000	8,000	575	77	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-827-H1	8	90	80	25	35,000	3,710	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-827-H1	8	90	80	36	35,000	1,550	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

*Use with Snap Lens

SORAA VIVID 2700K COLOR TEMPERATURE INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10d-927-03*	8	95	95	10	35,000	5,710	390	52	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-927-03	8	95	95	25	35,000	2,260	410	55	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-927-03	8	95	95	36	35,000	1,070	410	55	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SORAA HEALTHY

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SH-MR16-07-36D-27-01-X2	8	80	90	36	25,000	1,020	400	53	12V +/- 1.2V	UL/CUL, FCC Title 47 Part 15B, RoHS	50

SORAA BRILLIANT HIGH LUMEN 3000K COLOR TEMPERATURE

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-830-H1*	8	90	80	10	35,000	8,400	600	80	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-25D-830-H1	8	90	80	25	35,000	3,300	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75
	SM16-07-36D-830-H1	8	90	80	36	35,000	1,650	630	84	12V +/- 1.2V	Title 20 certification pending, UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	75

*Use with Snap Lens

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

12VAC LED MR16

REV 08.19.21

SORAA VIVID 3000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CCT Warm Dim	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-930-03*	8	95	95	10	35,000	6,000	410	55	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-930-03	8	95	95	25	35,000	2,400	435	58	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-930-03	8	95	95	36	35,000	1,130	435	58	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens

SORAA VIVID 4000K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	SM16-07-10D-940-03*	8	95	95	10	35,000	6,290	430	57	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-25D-940-03	8	95	95	25	35,000	2,510	455	61	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50
	SM16-07-36D-940-03	8	95	95	36	35,000	1,190	455	61	12V +/- 1.2V	UL/CUL Class 2 and non-Class 2, FCC Title 47 Part 15B, RoHS, CE	50

*Use with Snap Lens


SATCO 3500K COLOR TEMPERATURE MR16 INDOOR/OUTDOOR

Brand	Ordering Code	Watts	CRI	R9	Beam Angle (Degrees)	Lamp Life (Hours)	CBCP	Total Lumens	Lumens Per Watt	Voltage	Certification	Halogen Equivalent
	S8637	8	90+	N/A	15	25,000	6,290	430	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75
	S8642	8	90+	N/A	40	25,000	2,510	455	61	12	UL/CUL, FCC Title 47 Part 15B, RoHS, Lawful for sale in California	75

8MR16/LED/40/35K/90CRI/12V 8 watt; LED MR16; 3500K; 40° beam spread; GU5.3 base; 12 volts. Features: Silver back MR16 reflector. Direct replacements for 75 watt Halogen lamps - uses only 8 watts. Dimmable. No UV or IR radiation. Approved for enclosed fixtures.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


SORAA VIVID MR16 36° FL
3000K | Rf: 90.4 | Rg: 99.5
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	94.4	1.0%	0.8%
2	94.6	2.1%	-1.1%
3	91.9	1.1%	-3.3%
4	91.9	2.1%	-2.1%
5	93.9	0.4%	-0.9%
6	95.2	0%	1.9%
7	93.4	2.7%	-0.7%
8	92.7	4.2%	0.1%
9	90.5	3.6%	-3.9%
10	84.3	2.3%	-9.2%
11	81.3	2.3%	-12.7%
12	81.3	-3.6%	-10.3%
13	90.5	-2.5%	-6.2%
14	88.5	-8.2%	-0.4%
15	96.2	-1.0%	0.3%
16	86.6	-5.4%	8.2%


SOL-LIGHT WARM DIM MR16 36° FL
3000K | Rf: 94.2 | Rg: 101.2
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	96.0	0.3%	0.7%
2	96.8	0.9%	-0.8%
3	95.6	0.5%	-0.8%
4	93.1	-3.2%	-2.7%
5	95.7	-2.4%	0.4%
6	96.8	0.4%	1.6%
7	92.4	-1.4%	3.5%
8	96.8	1.2%	1.2%
9	94.0	1.4%	3.1%
10	92.6	2.1%	3.9%
11	92.2	3.7%	3.9%
12	92.4	3.9%	-0.9%
13	94.7	0.9%	-3.3%
14	93.4	3.0%	-3.2%
15	93.6	-1.1%	0.9%
16	90.2	2.4%	-6.7%


SORAA VIVID MR16 25° NFL
3000K | Rf: 94.0 | Rg: 101.0
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%

SOL-LIGHT WARM DIM MR16 24° NFL
3000K | Rf: 94.2 | Rg: 101.2
 Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	95.9	0.3%	0.8%
2	96.8	0.8%	-0.9%
3	95.5	0.4%	-0.9%
4	92.7	-3.4%	-2.9%
5	95.6	-2.7%	0.4%
6	96.8	0.1%	1.6%
7	92.2	-1.6%	3.7%
8	96.6	1.1%	1.5%
9	93.7	1.4%	3.3%
10	92.4	2.2%	4.1%
11	92.2	3.8%	3.8%
12	92.4	3.9%	-1.1%
13	94.4	0.8%	-3.6%
14	93.3	2.8%	-3.4%
15	93.4	-1.4%	0.9%
16	90.3	2.2%	-6.7%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------