

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 05.16.24



### DESCRIPTION

Nova Suspension Up/Down end feed using a Remote 24VDC power supply (sold separately) is a linear LED fixture that offers both direct and indirect light in a clean, contemporary style with an architectural aesthetic. The Nova Up/Down Linear Suspension is available in various increments from 12" to 240". The Downlight has a Diffused White lens with 100 degree beam spread and the uplight has a 135 degree Batwing Optic for optimal coverage and visual comfort. Choose from several Metal finishes and multiple Color Temperatures ranging from 2400K to 4000K, including two Warm Dim options of 2700K (**27D**) or 3000K (**30D**) that dim down to 2000K. Optional Black or White Louver for additional glare control. Remote Power supplies sold separately. Fixture includes a 5-year pro-rated warranty. For **custom lengths** and designs, email our Design Team: [design@PureEdgeLighting.com](mailto:design@PureEdgeLighting.com).


Wattages for this fixture are available in the following options:

- 7W - 2.5 watts per foot Up and 5 watts per foot Down, lengths up to 240" (20')
- 10W - 5 watts per foot Up and 5 watts per foot Down, lengths up to 240" (20')
- 12W - 5 watts per foot Up and 7.5 watts per foot Down, lengths up to 156" (13')

### INSTALLATION

- Includes 12' power cable and your choice of one or two canopies; one for remote power, one blank - 2R2, 2S2, 4R2, 4S2, VR Vanishing Point
- Adjustable 12' coaxial and aircraft cables included; additional aircraft cables included for support when fixture exceeds 84"
- Remote 120V/24VDC power supplies in various wattages sold separately
- Mounts to a standard junction box, prewired for either 120V with a 60 watt NON-IC (50W-IC) power supply that fits in the ceiling electrical junction box, or from a remote power supply feeding 24VDC up to 100 watts at a maximum of 20' away

### FINISHES

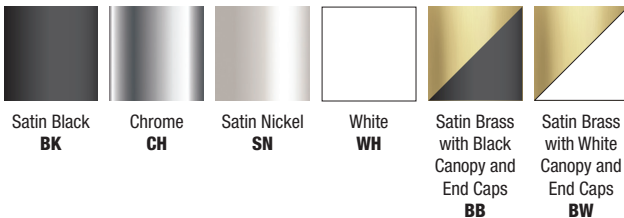

### LENSES

- Downlight - Diffused White 100° Lens with choice of White or Black Louver
- Uplight - 135° Batwing Optic

### LAMPING

- Up to 1119 Lumen's per ft see chart on page 2
- Choose from multiple color temperatures from 24K - 40K including Warm Dim
- Warm Dim - 2700K to 2000K (**27D**) or 3000K to 2000K (**30D**)
- 50,000 Hour Lamp Life

### REMOTE POWER SUPPLIES\*, DIMMERS & CONTROLS (SOLD SEPARATELY)

#### Static White & Warm Dim

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- \*In-Wall Mounting and drop ceiling Kits available for select power supplies

#### Controls

- [Pure Smart™ Wi-Fi Dimmer](#)

#### Lutron

- [Lutron Hi-Lume/Ecosystem](#)

### APPLICATIONS

- Designed for indoor use only. Ideal applications for Residential, Commercial and Hospitality environments.

### APPROVALS

Class 2 Wiring up to 100 watts, Damp Location Suitable, ETL listed, Made in America

| System                                                                           | Wattage Per Foot                                                 | Power Canopy                                               | Nominal Size                                                | Color Temperature                    | Finish                                               |
|----------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------|------------------------------------------------------|
| <b>NSBDD</b>                                                                     | <b>7W</b>                                                        | <b>2R</b>                                                  | <b>240</b>                                                  | <b>27K</b>                           | <b>SN</b>                                            |
| <b>NSUDD</b> Nova Suspension Up/Down Diffused Lens                               | <b>7W</b> 7.5 Watt, 240" (20ft) max length (2.5W up and 5W down) | <b>2R</b> 2" Round Canopy                                  | <b>12-240</b> Order in various increments from 12" to 240". | <b>24K</b> 2400K Very Warm White     | <b>BK</b> Satin Black                                |
| <b>NSUDDW</b> Nova Suspension Up/Down Diffused with White Louver                 | <b>10W</b> 10 Watt, 240" (20ft) max length (5W up and 5W down)   | <b>2S</b> 2" Square Canopy                                 |                                                             | <b>27K</b> 2700K Incandescent White  | <b>CH</b> Chrome                                     |
| <b>NSUDDB</b> Nova Suspension Up/Down Diffused with Black Louver                 | <b>12W</b> 12 Watt, 156" (13ft) max length (5W up and 7.5W down) | <b>4R</b> 4" Round Canopy                                  |                                                             | <b>27D</b> 2700K Warm Dim (10W only) | <b>SN</b> Satin Nickel                               |
| <b>NSBDD</b> Nova Suspension Up/Down Batwing Up Diffused Down                    |                                                                  | <b>4S</b> 4" Square Canopy                                 |                                                             | <b>30K</b> 3000K Warm White          | <b>WH</b> White                                      |
| <b>NSBDDW</b> Nova Suspension Up/Down Batwing Up Diffused Down with White Louver |                                                                  | <b>VR</b> Vanishing Point Plaster in system with No Canopy |                                                             | <b>30D</b> 3000K Warm Dim (10W only) | <b>BB</b> Satin Brass with Black Canopy and End Caps |
| <b>NSBDDB</b> Nova Suspension Up/Down Batwing Up Diffused Down with Black Louver |                                                                  | <b>2R2</b> 2 x 2.8" Round Canopies                         |                                                             | <b>35K</b> 3500K Neutral White       | <b>BW</b> Satin Brass with White Canopy and End Caps |
|                                                                                  |                                                                  | <b>2S2</b> 2 x 2.8" Square Canopies                        |                                                             | <b>40K</b> 4000K Cool White          |                                                      |
|                                                                                  |                                                                  | <b>4R2</b> 2 x 4.6" Round Canopies                         |                                                             |                                      |                                                      |
|                                                                                  |                                                                  | <b>4S2</b> 2 x 4.6" Square Canopies                        |                                                             |                                      |                                                      |

\*Maximum shipping length is 120", 84" for chrome  
\*\*See length chart for exact dimensions

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

### Lamp Data: Lamp data for Uplight Channel

| NSBDD, NSBDDW, NSBDDB            |                        |     |     |     |     |                |     |      |     |      |     |     |
|----------------------------------|------------------------|-----|-----|-----|-----|----------------|-----|------|-----|------|-----|-----|
| DESCRIPTION                      | 135° Batwing - Uplight |     |     |     |     |                |     |      |     |      |     |     |
| WATTS PER FOOT                   | 2w (2.5 watts)         |     |     |     |     | 5w (4.6 watts) |     |      |     |      |     |     |
| COLOR TEMPERATURE                | 24K                    | 27K | 30K | 35K | 40K | 24K            | 27K | 27D* | 30K | 30D* | 35K | 40K |
| LUMENS PER FOOT (lm/ft)          | 183                    | 202 | 221 | 253 | 275 | 317            | 349 | 432  | 381 | 432  | 436 | 474 |
| LUMENS PER WATT (lm/w)           | 73                     | 81  | 88  | 101 | 110 | 72             | 79  | 90   | 86  | 90   | 99  | 107 |
| CRI                              | 90+                    | 95+ | 95+ | 85+ | 85+ | 90+            | 95+ | 92+  | 95+ | 92+  | 85+ | 85+ |
| *27D, 30D - Warm Dim (4.8 Watts) |                        |     |     |     |     |                |     |      |     |      |     |     |

\*27D, 30D - Warm Dim (4.8 Watts)

### Lamp Data: Lamp data for Downlight Channel

| NSBDD                   |                |     |      |     |      |     |                |     |     |     |     |     |
|-------------------------|----------------|-----|------|-----|------|-----|----------------|-----|-----|-----|-----|-----|
| DESCRIPTION             |                |     |      |     |      |     |                |     |     |     |     |     |
| WATTS PER FOOT          | 5w (4.6 watts) |     |      |     |      |     | 7w (7.3 watts) |     |     |     |     |     |
| COLOR TEMPERATURE       | 24K            | 27K | 27D* | 30K | 30D* | 35K | 40K            | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 264            | 290 | 359  | 317 | 359  | 363 | 395            | 431 | 475 | 518 | 593 | 645 |
| LUMENS PER WATT (lm/w)  | 60             | 65  | 75   | 72  | 75   | 83  | 89             | 59  | 65  | 71  | 81  | 88  |
| CRI                     | 90+            | 95+ | 92+  | 95+ | 92+  | 85+ | 85+            | 90+ | 95+ | 95+ | 85+ | 85+ |

| NSBDDW                  |                                            |     |      |     |      |     |                |     |     |     |     |     |
|-------------------------|--------------------------------------------|-----|------|-----|------|-----|----------------|-----|-----|-----|-----|-----|
| DESCRIPTION             | 100° Diffused White Lens with White Louver |     |      |     |      |     |                |     |     |     |     |     |
| WATTS PER FOOT          | 5w (4.6 watts)                             |     |      |     |      |     | 7w (7.3 watts) |     |     |     |     |     |
| COLOR TEMPERATURE       | 24K                                        | 27K | 27D* | 30K | 30D* | 35K | 40K            | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 185                                        | 203 | 252  | 222 | 252  | 254 | 276            | 302 | 332 | 363 | 415 | 452 |
| LUMENS PER WATT (lm/w)  | 42                                         | 46  | 52   | 50  | 52   | 58  | 63             | 41  | 45  | 50  | 57  | 62  |
| CRI                     | 90+                                        | 95+ | 92+  | 95+ | 92+  | 85+ | 85+            | 90+ | 95+ | 95+ | 85+ | 85+ |


| NSBDDB                  |                                            |     |      |     |      |     |                |     |     |     |     |     |
|-------------------------|--------------------------------------------|-----|------|-----|------|-----|----------------|-----|-----|-----|-----|-----|
| DESCRIPTION             | 100° Diffused White Lens with Black Louver |     |      |     |      |     |                |     |     |     |     |     |
| WATTS PER FOOT          | 5w (4.6 watts)                             |     |      |     |      |     | 7w (7.3 watts) |     |     |     |     |     |
| COLOR TEMPERATURE       | 24K                                        | 27K | 27D* | 30K | 30D* | 35K | 40K            | 24K | 27K | 30K | 35K | 40K |
| LUMENS PER FOOT (lm/ft) | 116                                        | 127 | 157  | 139 | 157  | 159 | 173            | 189 | 208 | 227 | 260 | 283 |
| LUMENS PER WATT (lm/w)  | 26                                         | 29  | 33   | 31  | 33   | 36  | 39             | 26  | 28  | 31  | 36  | 39  |
| CRI                     | 90+                                        | 95+ | 92+  | 95+ | 92+  | 85+ | 85+            | 90+ | 95+ | 95+ | 85+ | 85+ |

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

### Channel Finishes



Satin Black  
**BK**



Chrome  
**CH**



Satin Aluminum  
**SA**



Satin Nickel  
**SN**



White  
**WH**




Satin Brass with Black  
Canopy and Hardware  
**BB**




Satin Brass with White  
Canopy and Hardware  
**BW**



Shown without Louver

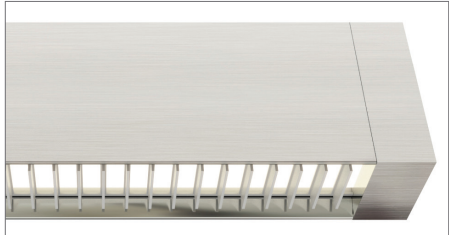


Shown with White Louver

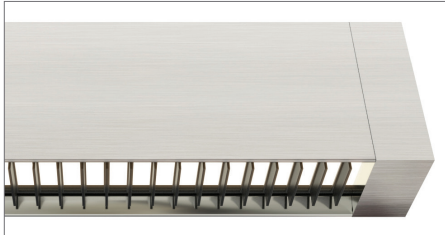


Shown with Black Louver

### Nova Suspension Up/Down

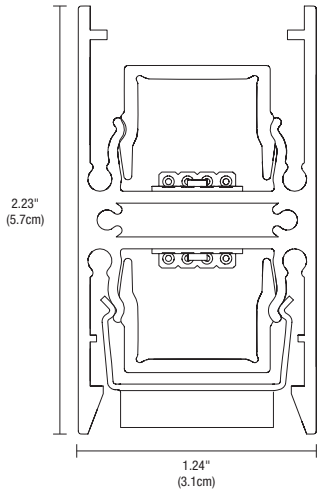


Uplight shown without Louver  
Downlight shown with louver


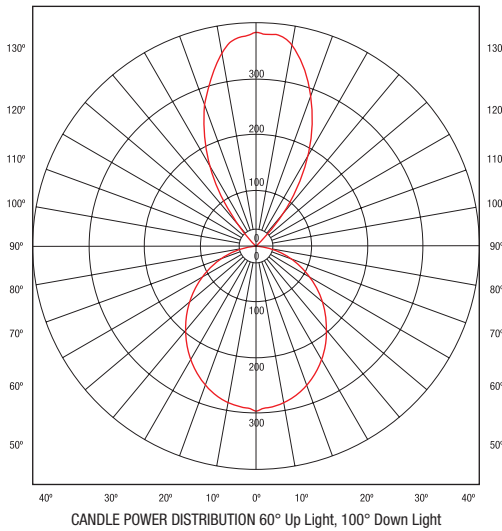


BEAM SPREAD CHART  
NSUDD 3000K 10Watt  
5 Watt 60° Up, 5 Watt 100° Down

### Nova Suspension Up/Down with Batwing

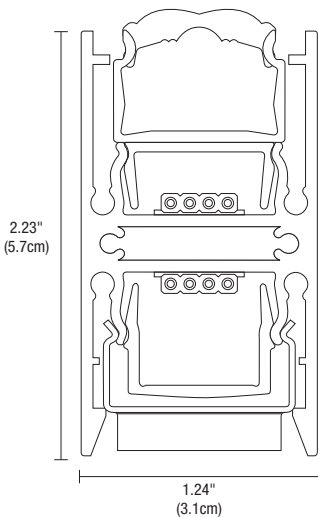

Uplight shown with Batwing, Downlight shown with louver

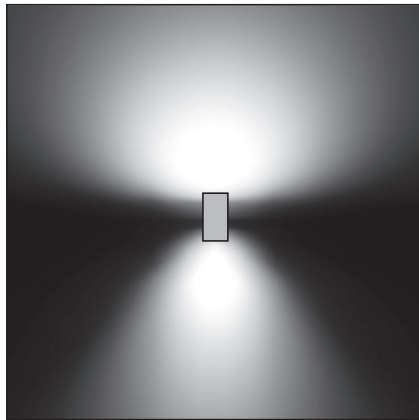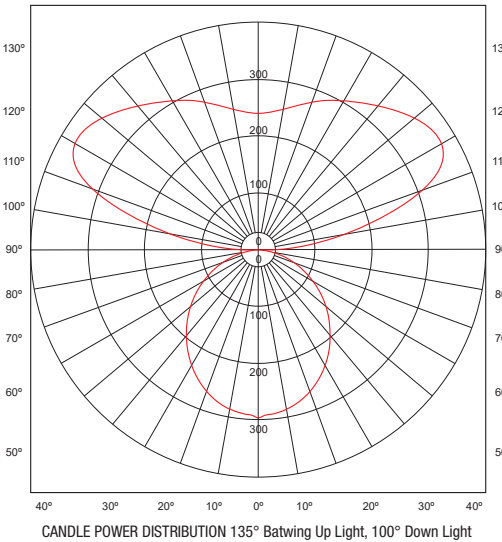

BEAM SPREAD CHART  
Nova Up/Down Batwing  
135° Batwing Up, 7W 100° Down

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

### Length Chart: Actual lengths for Nova Suspension Up/Down - Remote Power Supply

| STATIC WHITE                    |                           |                                           |    |                     |                                        |    |                     |                                          |     |                     |
|---------------------------------|---------------------------|-------------------------------------------|----|---------------------|----------------------------------------|----|---------------------|------------------------------------------|-----|---------------------|
| Ordering Code<br>(Nominal Size) | Actual<br>Length (Inches) | Total Wattage 7.5W<br>(2.5W Up & 5W Down) |    | Power Supply        | Total Wattage 10W<br>(5W Up & 5W Down) |    | Power Supply        | Total Wattage 12W<br>(5W Up & 7.3W Down) |     | Power Supply        |
| 12                              | 13.4                      | 3                                         | 5  | PSB-2X40W-UNI-24VDC | 5                                      | 5  | PSB-2X40W-UNI-24VDC | 5                                        | 7   | PSB-2X40W-UNI-24VDC |
| 15                              | 15.8                      | 3                                         | 6  | PSB-2X40W-UNI-24VDC | 6                                      | 6  | PSB-2X40W-UNI-24VDC | 6                                        | 9   | PSB-2X40W-UNI-24VDC |
| 17                              | 18.2                      | 4                                         | 7  | PSB-2X40W-UNI-24VDC | 7                                      | 7  | PSB-2X40W-UNI-24VDC | 7                                        | 10  | PSB-2X40W-UNI-24VDC |
| 20                              | 20.6                      | 4                                         | 8  | PSB-2X40W-UNI-24VDC | 8                                      | 8  | PSB-2X40W-UNI-24VDC | 8                                        | 12  | PSB-2X40W-UNI-24VDC |
| 22                              | 23.0                      | 5                                         | 9  | PSB-2X40W-UNI-24VDC | 9                                      | 9  | PSB-2X40W-UNI-24VDC | 9                                        | 13  | PSB-2X40W-UNI-24VDC |
| 24                              | 25.4                      | 5                                         | 10 | PSB-2X40W-UNI-24VDC | 10                                     | 10 | PSB-2X40W-UNI-24VDC | 10                                       | 15  | PSB-2X40W-UNI-24VDC |
| 27                              | 27.8                      | 6                                         | 11 | PSB-2X40W-UNI-24VDC | 11                                     | 11 | PSB-2X40W-UNI-24VDC | 11                                       | 16  | PSB-2X40W-UNI-24VDC |
| 29                              | 30.2                      | 6                                         | 12 | PSB-2X40W-UNI-24VDC | 12                                     | 12 | PSB-2X40W-UNI-24VDC | 12                                       | 18  | PSB-2X40W-UNI-24VDC |
| 32                              | 32.6                      | 7                                         | 13 | PSB-2X40W-UNI-24VDC | 13                                     | 13 | PSB-2X40W-UNI-24VDC | 13                                       | 19  | PSB-2X40W-UNI-24VDC |
| 34                              | 35.0                      | 7                                         | 14 | PSB-2X40W-UNI-24VDC | 14                                     | 14 | PSB-2X40W-UNI-24VDC | 14                                       | 21  | PSB-2X40W-UNI-24VDC |
| 36                              | 37.4                      | 8                                         | 15 | PSB-2X40W-UNI-24VDC | 15                                     | 15 | PSB-2X40W-UNI-24VDC | 15                                       | 22  | PSB-2X40W-UNI-24VDC |
| 39                              | 39.8                      | 8                                         | 16 | PSB-2X40W-UNI-24VDC | 16                                     | 16 | PSB-2X40W-UNI-24VDC | 16                                       | 24  | PSB-2X40W-UNI-24VDC |
| 41                              | 42.2                      | 9                                         | 17 | PSB-2X40W-UNI-24VDC | 17                                     | 17 | PSB-2X40W-UNI-24VDC | 17                                       | 25  | PSB-2X40W-UNI-24VDC |
| 44                              | 44.6                      | 9                                         | 18 | PSB-2X40W-UNI-24VDC | 18                                     | 18 | PSB-2X40W-UNI-24VDC | 18                                       | 27  | PSB-2X40W-UNI-24VDC |
| 46                              | 47.0                      | 10                                        | 19 | PSB-2X40W-UNI-24VDC | 19                                     | 19 | PSB-2X40W-UNI-24VDC | 19                                       | 28  | PSB-2X40W-UNI-24VDC |
| 48                              | 49.4                      | 10                                        | 20 | PSB-2X40W-UNI-24VDC | 20                                     | 20 | PSB-2X40W-UNI-24VDC | 20                                       | 29  | PSB-2X40W-UNI-24VDC |
| 51                              | 51.8                      | 11                                        | 21 | PSB-2X40W-UNI-24VDC | 21                                     | 21 | PSB-2X40W-UNI-24VDC | 21                                       | 31  | PSB-2X40W-UNI-24VDC |
| 53                              | 54.2                      | 11                                        | 22 | PSB-2X40W-UNI-24VDC | 22                                     | 22 | PSB-2X40W-UNI-24VDC | 22                                       | 32  | PSB-2X40W-UNI-24VDC |
| 56                              | 56.6                      | 12                                        | 23 | PSB-2X40W-UNI-24VDC | 23                                     | 23 | PSB-2X40W-UNI-24VDC | 23                                       | 34  | PSB-2X40W-UNI-24VDC |
| 58                              | 59.0                      | 12                                        | 24 | PSB-2X40W-UNI-24VDC | 24                                     | 24 | PSB-2X40W-UNI-24VDC | 24                                       | 35  | PSB-2X40W-UNI-24VDC |
| 60                              | 61.4                      | 13                                        | 25 | PSB-2X40W-UNI-24VDC | 25                                     | 25 | PSB-2X40W-UNI-24VDC | 25                                       | 36  | PSB-2X40W-UNI-24VDC |
| 63                              | 63.8                      | 13                                        | 26 | PSB-2X40W-UNI-24VDC | 26                                     | 26 | PSB-2X40W-UNI-24VDC | 26                                       | 38  | PSB-2X40W-UNI-24VDC |
| 65                              | 66.2                      | 14                                        | 27 | PSB-2X40W-UNI-24VDC | 27                                     | 27 | PSB-2X40W-UNI-24VDC | 27                                       | 40  | PSB-2X60W-UNI-24VDC |
| 68                              | 68.6                      | 14                                        | 28 | PSB-2X40W-UNI-24VDC | 28                                     | 28 | PSB-2X40W-UNI-24VDC | 28                                       | 41  | PSB-2X60W-UNI-24VDC |
| 70                              | 71.0                      | 15                                        | 29 | PSB-2X40W-UNI-24VDC | 29                                     | 29 | PSB-2X40W-UNI-24VDC | 29                                       | 43  | PSB-2X60W-UNI-24VDC |
| 72                              | 73.4                      | 15                                        | 30 | PSB-2X40W-UNI-24VDC | 30                                     | 30 | PSB-2X40W-UNI-24VDC | 30                                       | 44  | PSB-2X60W-UNI-24VDC |
| 75                              | 75.8                      | 16                                        | 31 | PSB-2X40W-UNI-24VDC | 31                                     | 31 | PSB-2X40W-UNI-24VDC | 31                                       | 46  | PSB-2X60W-UNI-24VDC |
| 77                              | 78.2                      | 16                                        | 32 | PSB-2X40W-UNI-24VDC | 32                                     | 32 | PSB-2X40W-UNI-24VDC | 32                                       | 47  | PSB-2X60W-UNI-24VDC |
| 80                              | 80.6                      | 17                                        | 33 | PSB-2X40W-UNI-24VDC | 33                                     | 33 | PSB-2X40W-UNI-24VDC | 33                                       | 49  | PSB-2X60W-UNI-24VDC |
| 82                              | 83.0                      | 17                                        | 34 | PSB-2X40W-UNI-24VDC | 34                                     | 34 | PSB-2X40W-UNI-24VDC | 34                                       | 50  | PSB-2X60W-UNI-24VDC |
| 84*                             | 85.4                      | 18                                        | 35 | PSB-2X40W-UNI-24VDC | 35                                     | 35 | PSB-2X40W-UNI-24VDC | 35                                       | 51  | PSB-2X60W-UNI-24VDC |
| 87                              | 87.8                      | 18                                        | 36 | PSB-2X40W-UNI-24VDC | 36                                     | 36 | PSB-2X40W-UNI-24VDC | 36                                       | 53  | PSB-2X60W-UNI-24VDC |
| 89                              | 90.2                      | 19                                        | 37 | PSB-2X40W-UNI-24VDC | 37                                     | 37 | PSB-2X40W-UNI-24VDC | 37                                       | 54  | PSB-2X60W-UNI-24VDC |
| 92                              | 92.6                      | 19                                        | 38 | PSB-2X40W-UNI-24VDC | 38                                     | 38 | PSB-2X40W-UNI-24VDC | 38                                       | 56  | PSB-2X60W-UNI-24VDC |
| 94                              | 95.0                      | 20                                        | 39 | PSB-2X40W-UNI-24VDC | 39                                     | 39 | PSB-2X40W-UNI-24VDC | 39                                       | 57  | PSB-2X60W-UNI-24VDC |
| 96                              | 97.4                      | 20                                        | 40 | PSB-2X60W-UNI-24VDC | 40                                     | 40 | PSB-2X60W-UNI-24VDC | 40                                       | 58  | PSB-2X60W-UNI-24VDC |
| 99                              | 99.8                      | 21                                        | 41 | PSB-2X60W-UNI-24VDC | 41                                     | 41 | PSB-2X60W-UNI-24VDC | 41                                       | 60  | PSB-2X96W-UNI-24VDC |
| 101                             | 102.2                     | 21                                        | 42 | PSB-2X60W-UNI-24VDC | 42                                     | 42 | PSB-2X60W-UNI-24VDC | 42                                       | 61  | PSB-2X96W-UNI-24VDC |
| 104                             | 104.6                     | 22                                        | 43 | PSB-2X60W-UNI-24VDC | 43                                     | 43 | PSB-2X60W-UNI-24VDC | 43                                       | 63  | PSB-2X96W-UNI-24VDC |
| 106                             | 107.0                     | 22                                        | 44 | PSB-2X60W-UNI-24VDC | 44                                     | 44 | PSB-2X60W-UNI-24VDC | 44                                       | 64  | PSB-2X96W-UNI-24VDC |
| 108                             | 109.4                     | 23                                        | 45 | PSB-2X60W-UNI-24VDC | 45                                     | 45 | PSB-2X60W-UNI-24VDC | 45                                       | 66  | PSB-2X96W-UNI-24VDC |
| 111                             | 111.8                     | 23                                        | 46 | PSB-2X60W-UNI-24VDC | 46                                     | 46 | PSB-2X60W-UNI-24VDC | 46                                       | 68  | PSB-2X96W-UNI-24VDC |
| 113                             | 114.2                     | 24                                        | 47 | PSB-2X60W-UNI-24VDC | 47                                     | 47 | PSB-2X60W-UNI-24VDC | 47                                       | 69  | PSB-2X96W-UNI-24VDC |
| 116                             | 116.6                     | 24                                        | 48 | PSB-2X60W-UNI-24VDC | 48                                     | 48 | PSB-2X60W-UNI-24VDC | 48                                       | 71  | PSB-2X96W-UNI-24VDC |
| 118                             | 119                       | 25                                        | 49 | PSB-2X60W-UNI-24VDC | 49                                     | 49 | PSB-2X60W-UNI-24VDC | 49                                       | 72  | PSB-2X96W-UNI-24VDC |
| 120**                           | 121.4                     | 25                                        | 50 | PSB-2X60W-UNI-24VDC | 50                                     | 50 | PSB-2X60W-UNI-24VDC | 50                                       | 73  | PSB-2X96W-UNI-24VDC |
| 123                             | 124.2                     | 26                                        | 51 | PSB-2X60W-UNI-24VDC | 51                                     | 51 | PSB-2X60W-UNI-24VDC | 51                                       | 75  | PSB-2X96W-UNI-24VDC |
| 125                             | 126.6                     | 26                                        | 52 | PSB-2X60W-UNI-24VDC | 52                                     | 52 | PSB-2X60W-UNI-24VDC | 52                                       | 76  | PSB-2X96W-UNI-24VDC |
| 128                             | 129                       | 27                                        | 53 | PSB-2X60W-UNI-24VDC | 53                                     | 53 | PSB-2X60W-UNI-24VDC | 53                                       | 78  | PSB-2X96W-UNI-24VDC |
| 130                             | 131.4                     | 27                                        | 54 | PSB-2X60W-UNI-24VDC | 54                                     | 54 | PSB-2X60W-UNI-24VDC | 54                                       | 79  | PSB-2X96W-UNI-24VDC |
| 132                             | 133.8                     | 28                                        | 55 | PSB-2X60W-UNI-24VDC | 55                                     | 55 | PSB-2X60W-UNI-24VDC | 55                                       | 81  | PSB-2X96W-UNI-24VDC |
| 135                             | 136.2                     | 28                                        | 56 | PSB-2X60W-UNI-24VDC | 56                                     | 56 | PSB-2X60W-UNI-24VDC | 56                                       | 82  | PSB-2X96W-UNI-24VDC |
| 137                             | 138.6                     | 29                                        | 57 | PSB-2X60W-UNI-24VDC | 57                                     | 57 | PSB-2X60W-UNI-24VDC | 57                                       | 83  | PSB-2X96W-UNI-24VDC |
| 140                             | 141                       | 29                                        | 58 | PSB-2X60W-UNI-24VDC | 58                                     | 58 | PSB-2X60W-UNI-24VDC | 58                                       | 85  | PSB-2X96W-UNI-24VDC |
| 142                             | 143.4                     | 30                                        | 59 | PSB-2X60W-UNI-24VDC | 59                                     | 59 | PSB-2X60W-UNI-24VDC | 59                                       | 86  | PSB-2X96W-UNI-24VDC |
| 144                             | 145.8                     | 30                                        | 60 | PSB-2X96W-UNI-24VDC | 60                                     | 60 | PSB-2X96W-UNI-24VDC | 60                                       | 88  | PSB-2X96W-UNI-24VDC |
| 147                             | 148.2                     | 31                                        | 61 | PSB-2X96W-UNI-24VDC | 61                                     | 61 | PSB-2X96W-UNI-24VDC | 61                                       | 89  | PSB-2X96W-UNI-24VDC |
| 149                             | 150.6                     | 31                                        | 62 | PSB-2X96W-UNI-24VDC | 62                                     | 62 | PSB-2X96W-UNI-24VDC | 62                                       | 91  | PSB-2X96W-UNI-24VDC |
| 152                             | 153                       | 32                                        | 63 | PSB-2X96W-UNI-24VDC | 63                                     | 63 | PSB-2X96W-UNI-24VDC | 63                                       | 92  | PSB-2X96W-UNI-24VDC |
| 154                             | 155.4                     | 32                                        | 64 | PSB-2X96W-UNI-24VDC | 64                                     | 64 | PSB-2X96W-UNI-24VDC | 64                                       | 94  | PSB-2X96W-UNI-24VDC |
| 156                             | 157.8                     | 33                                        | 65 | PSB-2X96W-UNI-24VDC | 65                                     | 65 | PSB-2X96W-UNI-24VDC | 65                                       | 95  | PSB-2X96W-UNI-24VDC |
| 159                             | 160.2                     | 33                                        | 66 | PSB-2X96W-UNI-24VDC | 66                                     | 66 | PSB-2X96W-UNI-24VDC | 66                                       | 97  | PSB-100W-ELV-24VDC  |
| 161                             | 162.6                     | 34                                        | 67 | PSB-2X96W-UNI-24VDC | 67                                     | 67 | PSB-2X96W-UNI-24VDC | 67                                       | 98  | PSB-100W-ELV-24VDC  |
| 164                             | 165                       | 34                                        | 68 | PSB-2X96W-UNI-24VDC | 68                                     | 68 | PSB-2X96W-UNI-24VDC | 68                                       | 100 | PSB-100W-ELV-24VDC  |
| 166                             | 167.4                     | 35                                        | 69 | PSB-2X96W-UNI-24VDC | 69                                     | 69 | PSB-2X96W-UNI-24VDC |                                          |     |                     |

\*Maximum Chrome Length \*\*Maximum Shipping Length

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

**Length Chart:** Actual lengths for Nova Suspension Up/Down - Remote Power Supply

| STATIC WHITE                 |                        |                                        |     |                     |                                     |     |                     |
|------------------------------|------------------------|----------------------------------------|-----|---------------------|-------------------------------------|-----|---------------------|
| Ordering Code (Nominal Size) | Actual Length (Inches) | Total Wattage 7.5W (2.5W Up & 5W Down) |     | Power Supply        | Total Wattage 10W (5W Up & 5W Down) |     | Power Supply        |
| 168                          | 169.8                  | 35                                     | 70  | PSB-2X96W-UNI-24VDC | 70                                  | 70  | PSB-2X96W-UNI-24VDC |
| 171                          | 172.2                  | 36                                     | 71  | PSB-2X96W-UNI-24VDC | 71                                  | 71  | PSB-2X96W-UNI-24VDC |
| 173                          | 174.6                  | 36                                     | 72  | PSB-2X96W-UNI-24VDC | 72                                  | 72  | PSB-2X96W-UNI-24VDC |
| 176                          | 177                    | 37                                     | 73  | PSB-2X96W-UNI-24VDC | 73                                  | 73  | PSB-2X96W-UNI-24VDC |
| 178                          | 179.4                  | 37                                     | 74  | PSB-2X96W-UNI-24VDC | 74                                  | 74  | PSB-2X96W-UNI-24VDC |
| 180                          | 181.8                  | 38                                     | 75  | PSB-2X96W-UNI-24VDC | 75                                  | 75  | PSB-2X96W-UNI-24VDC |
| 183                          | 184.2                  | 38                                     | 76  | PSB-2X96W-UNI-24VDC | 76                                  | 76  | PSB-2X96W-UNI-24VDC |
| 185                          | 186.6                  | 39                                     | 77  | PSB-2X96W-UNI-24VDC | 77                                  | 77  | PSB-2X96W-UNI-24VDC |
| 188                          | 189                    | 39                                     | 78  | PSB-2X96W-UNI-24VDC | 78                                  | 78  | PSB-2X96W-UNI-24VDC |
| 190                          | 191.4                  | 40                                     | 79  | PSB-2X96W-UNI-24VDC | 79                                  | 79  | PSB-2X96W-UNI-24VDC |
| 192                          | 193.8                  | 40                                     | 80  | PSB-2X96W-UNI-24VDC | 80                                  | 80  | PSB-2X96W-UNI-24VDC |
| 195                          | 196.2                  | 41                                     | 81  | PSB-2X96W-UNI-24VDC | 81                                  | 81  | PSB-2X96W-UNI-24VDC |
| 197                          | 198.6                  | 41                                     | 82  | PSB-2X96W-UNI-24VDC | 82                                  | 82  | PSB-2X96W-UNI-24VDC |
| 200                          | 201                    | 42                                     | 83  | PSB-2X96W-UNI-24VDC | 83                                  | 83  | PSB-2X96W-UNI-24VDC |
| 202                          | 203.4                  | 42                                     | 84  | PSB-2X96W-UNI-24VDC | 84                                  | 84  | PSB-2X96W-UNI-24VDC |
| 204                          | 205.8                  | 43                                     | 85  | PSB-2X96W-UNI-24VDC | 85                                  | 85  | PSB-2X96W-UNI-24VDC |
| 207                          | 208.2                  | 43                                     | 86  | PSB-2X96W-UNI-24VDC | 86                                  | 86  | PSB-2X96W-UNI-24VDC |
| 209                          | 210.6                  | 44                                     | 87  | PSB-2X96W-UNI-24VDC | 87                                  | 87  | PSB-2X96W-UNI-24VDC |
| 212                          | 213                    | 44                                     | 88  | PSB-2X96W-UNI-24VDC | 88                                  | 88  | PSB-2X96W-UNI-24VDC |
| 214                          | 215.4                  | 45                                     | 89  | PSB-2X96W-UNI-24VDC | 89                                  | 89  | PSB-2X96W-UNI-24VDC |
| 216                          | 217.8                  | 45                                     | 90  | PSB-2X96W-UNI-24VDC | 90                                  | 90  | PSB-2X96W-UNI-24VDC |
| 219                          | 220.2                  | 46                                     | 91  | PSB-2X96W-UNI-24VDC | 91                                  | 91  | PSB-2X96W-UNI-24VDC |
| 221                          | 222.6                  | 46                                     | 92  | PSB-2X96W-UNI-24VDC | 92                                  | 92  | PSB-2X96W-UNI-24VDC |
| 224                          | 225                    | 47                                     | 93  | PSB-2X96W-UNI-24VDC | 93                                  | 93  | PSB-2X96W-UNI-24VDC |
| 226                          | 227.4                  | 47                                     | 94  | PSB-2X96W-UNI-24VDC | 94                                  | 94  | PSB-2X96W-UNI-24VDC |
| 228                          | 229.8                  | 48                                     | 95  | PSB-2X96W-UNI-24VDC | 95                                  | 95  | PSB-2X96W-UNI-24VDC |
| 231                          | 232.2                  | 48                                     | 96  | PSB-2X96W-UNI-24VDC | 96                                  | 96  | PSB-2X96W-UNI-24VDC |
| 233                          | 234.6                  | 49                                     | 97  | PSB-100W-ELV-24VDC  | 97                                  | 97  | PSB-100W-ELV-24VDC  |
| 236                          | 237                    | 49                                     | 98  | PSB-100W-ELV-24VDC  | 98                                  | 98  | PSB-100W-ELV-24VDC  |
| 238                          | 239.4                  | 50                                     | 99  | PSB-100W-ELV-24VDC  | 99                                  | 99  | PSB-100W-ELV-24VDC  |
| 240                          | 241.8                  | 50                                     | 100 | PSB-100W-ELV-24VDC  | 100                                 | 100 | PSB-100W-ELV-24VDC  |

| WARM DIM                     |                        |                                     |     |                     |
|------------------------------|------------------------|-------------------------------------|-----|---------------------|
| Ordering Code (Nominal Size) | Actual Length (Inches) | Total Wattage 10W (5W Up & 5W Down) |     | Power Supply        |
| 12                           | 13.4                   | 5                                   | 5   | PSB-2X60W-UNI-24VDC |
| 24                           | 25.4                   | 10                                  | 10  | PSB-2X60W-UNI-24VDC |
| 36                           | 37.4                   | 15                                  | 15  | PSB-2X40W-UNI-24VDC |
| 48                           | 49.4                   | 20                                  | 20  | PSB-2X40W-UNI-24VDC |
| 60                           | 61.4                   | 25                                  | 25  | PSB-2X40W-UNI-24VDC |
| 72                           | 73.4                   | 30                                  | 30  | PSB-2X40W-UNI-24VDC |
| 84*                          | 85.4                   | 35                                  | 35  | PSB-2X40W-UNI-24VDC |
| 96                           | 97.4                   | 40                                  | 40  | PSB-2X60W-UNI-24VDC |
| 108                          | 109.4                  | 45                                  | 45  | PSB-2X60W-UNI-24VDC |
| 120**                        | 121.4                  | 50                                  | 50  | PSB-2X60W-UNI-24VDC |
| 132                          | 133.8                  | 55                                  | 55  | PSB-2X60W-UNI-24VDC |
| 144                          | 145.8                  | 60                                  | 60  | PSB-2X96W-UNI-24VDC |
| 156                          | 157.8                  | 65                                  | 65  | PSB-2X96W-UNI-24VDC |
| 168                          | 169.8                  | 70                                  | 70  | PSB-2X96W-UNI-24VDC |
| 180                          | 181.8                  | 75                                  | 75  | PSB-2X96W-UNI-24VDC |
| 192                          | 193.8                  | 80                                  | 80  | PSB-2X96W-UNI-24VDC |
| 204                          | 205.8                  | 85                                  | 85  | PSB-2X96W-UNI-24VDC |
| 216                          | 217.8                  | 90                                  | 90  | PSB-2X96W-UNI-24VDC |
| 228                          | 229.8                  | 95                                  | 95  | PSB-2X96W-UNI-24VDC |
| 240                          | 241.8                  | 100                                 | 100 | PSB-100W-ELV-24VDC  |

\*Maximum Chrome Length \*\*Maximum Shipping Length


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER


### REMOTE POWER CANOPIES

The 2" Round and Square Canopy includes a NC2-JBOX junction box cover. The 4" canopies mount to a standard 4" junction box. Vanishing point is the only truly trimless and flush design available on the market with cables that disappear into the ceiling. Refer to the [Vanishing Point specification](#) for details and requirements including millwork options.

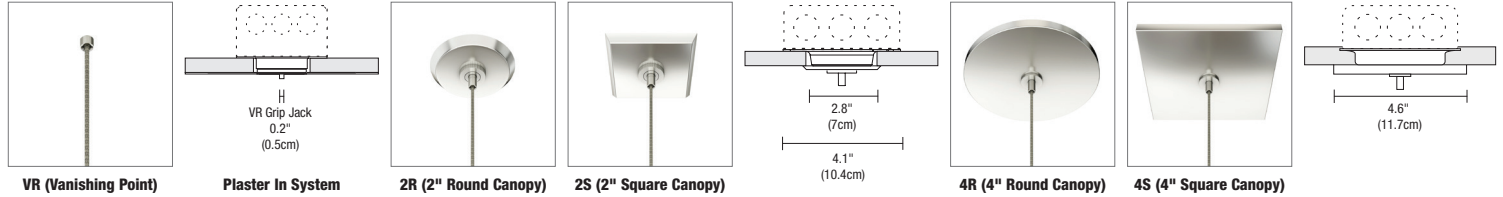


### NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

The New Construction NC2-JBOX cover is included with the 2" Round and Square canopies and is not required for the 4" square canopies. The NC2 cover mounts to a standard 4" junction or octagon box accommodating the 2" Plaster Ring for use with the 2R and 2S canopies. The Remodel RM2-JBOX plaster plate cover must be used with the supplied PureEdge junction box.


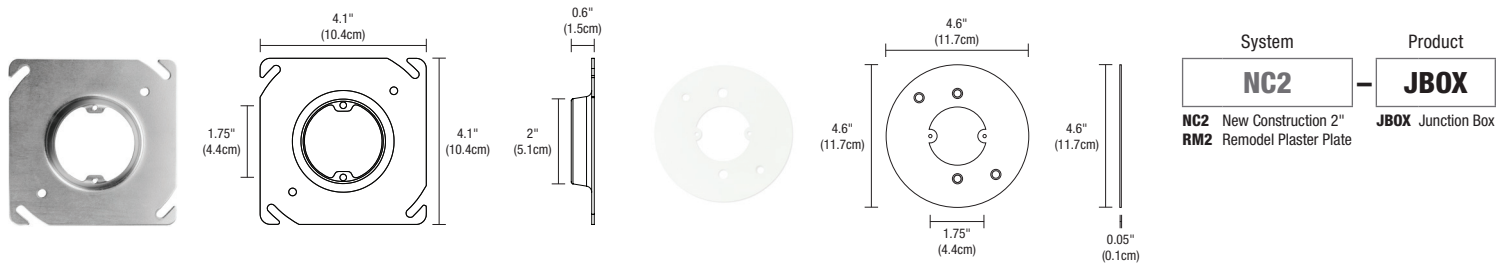


**ACCESSORIES** Additional components may be required based on lighting design and application.

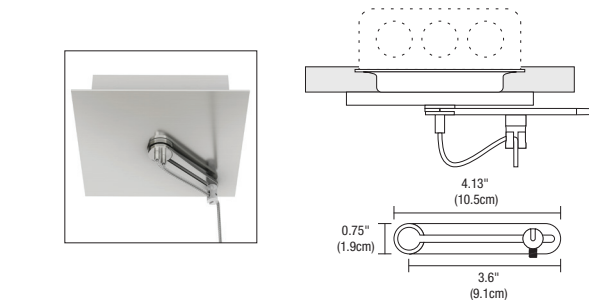



### CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, 2S, 4R and 4S Power Canopies (Canopy not included).

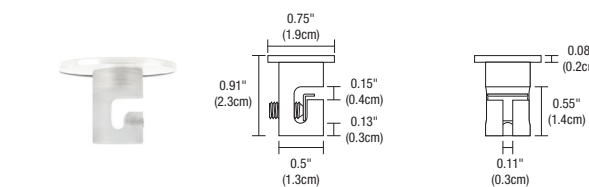


### CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

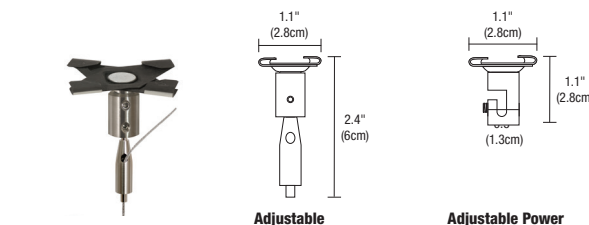

### CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Adjustable is offered in Satin Nickel, Clear plastic for Adjustable Power.










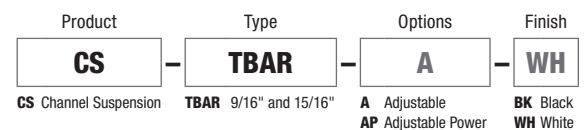


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

**Drawings:** Drawings are shown with 2 inch round canopy, 2 inch square canopy, 4 inch round canopy, and 4 inch square canopy

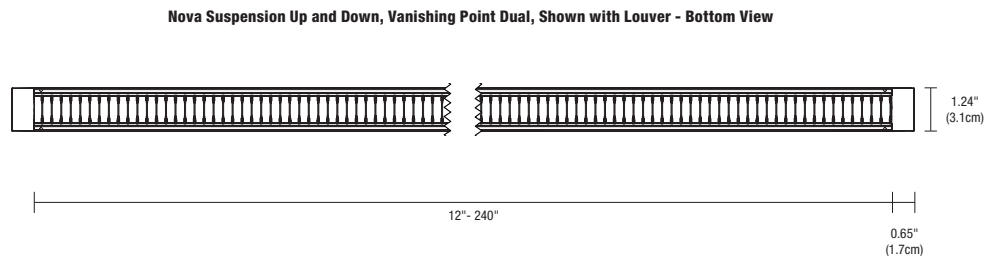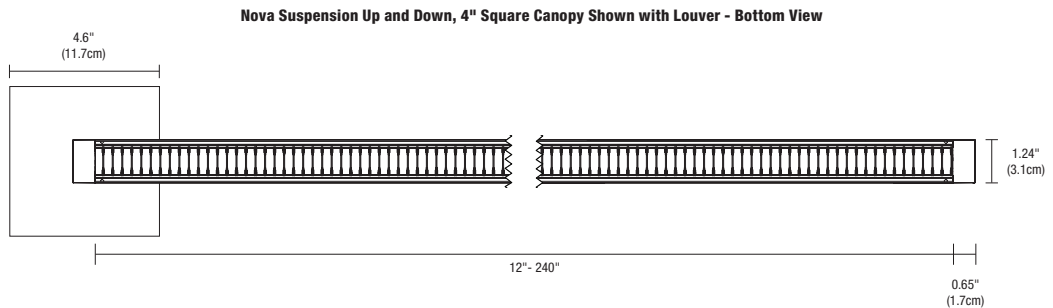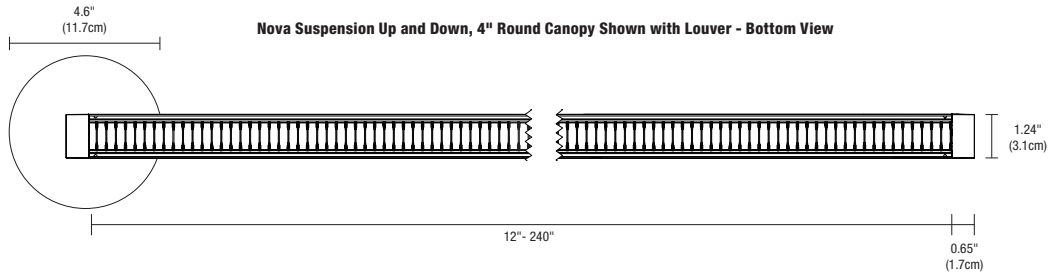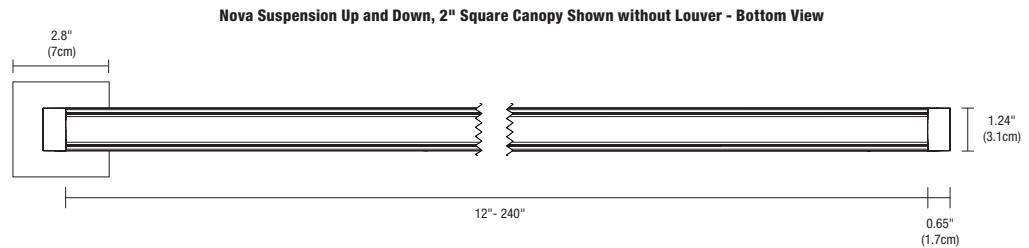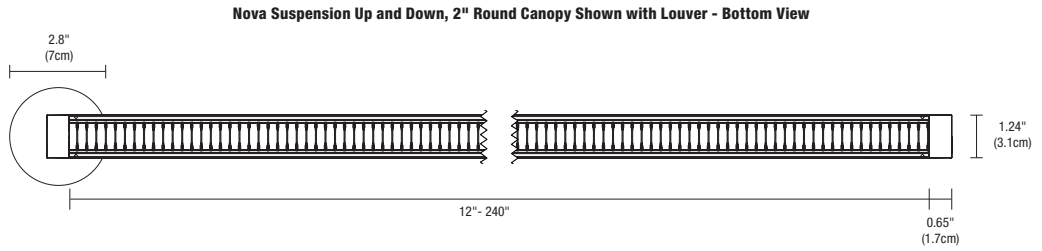


| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|
|---------|--------------|------|

# NOVA UP AND DOWN END FEED


## LED SUSPENSION WITH REMOTE POWER

**Drawings:** Side-view shown with two 2 and 4 inch canopies; one for remote power, one blank


Nova Suspension Up and Down with Remote Power 4R2, 4S2, 4" Canopy Shown with Louver - Side View

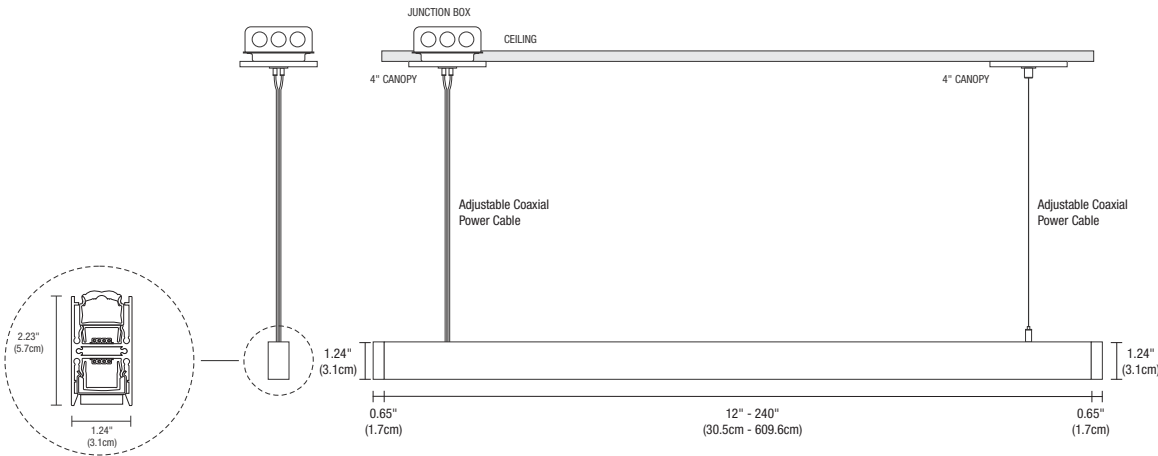

Nova Suspension Up and Down with Remote Power 2R2, 2S2, 2" Canopy, Shown with Louver - Side View

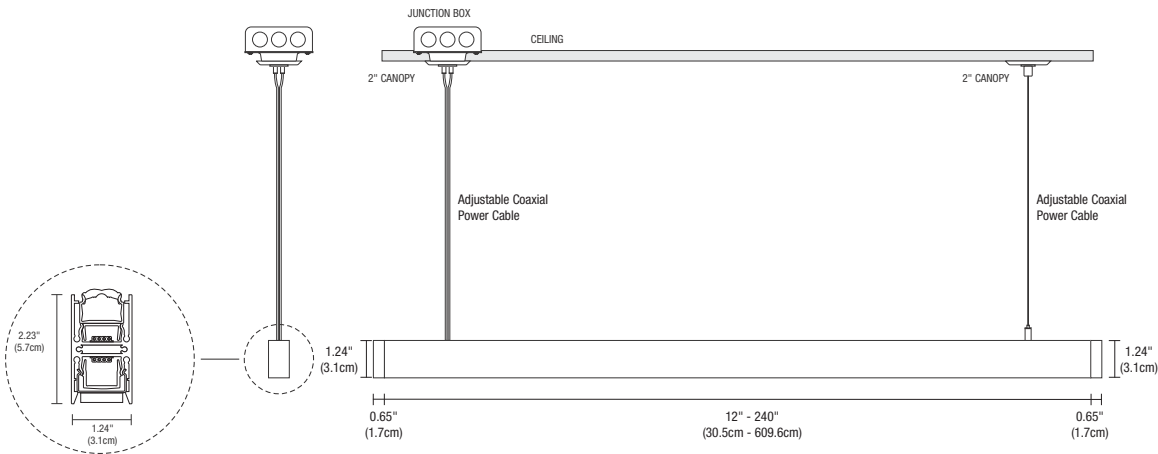

Nova Suspension Up and Down with Dual Feed Remote Power 2R2, 2S2, 2" Canopy, Shown with Louver - Side View

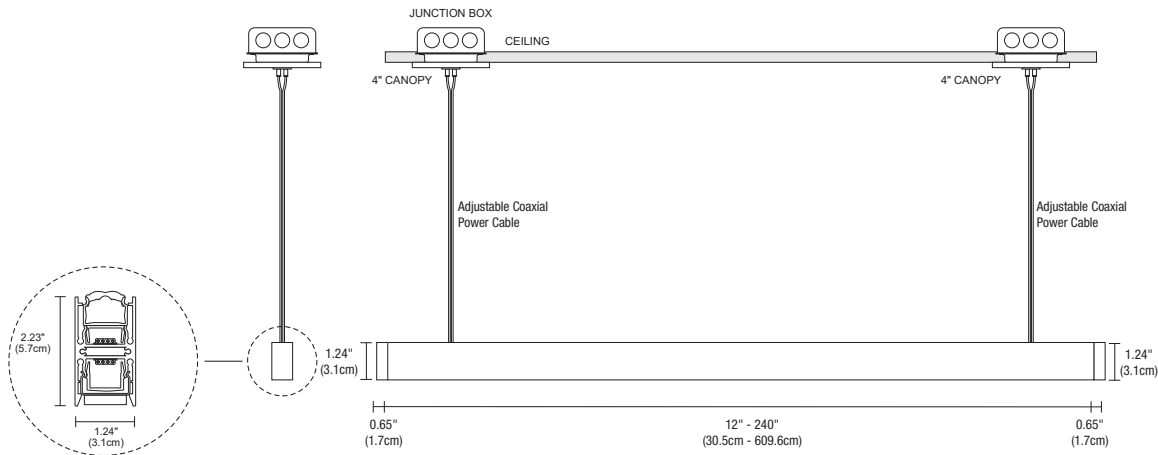

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|


# NOVA UP AND DOWN END FEED

## LED SUSPENSION WITH REMOTE POWER

### Wiring Diagram: Wiring diagram for Static White with Dual ELV Dimmers

**Application:** ELV dimming for Nova Suspension Up and Down with Remote Power - End Feed Canopy, Static White


**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

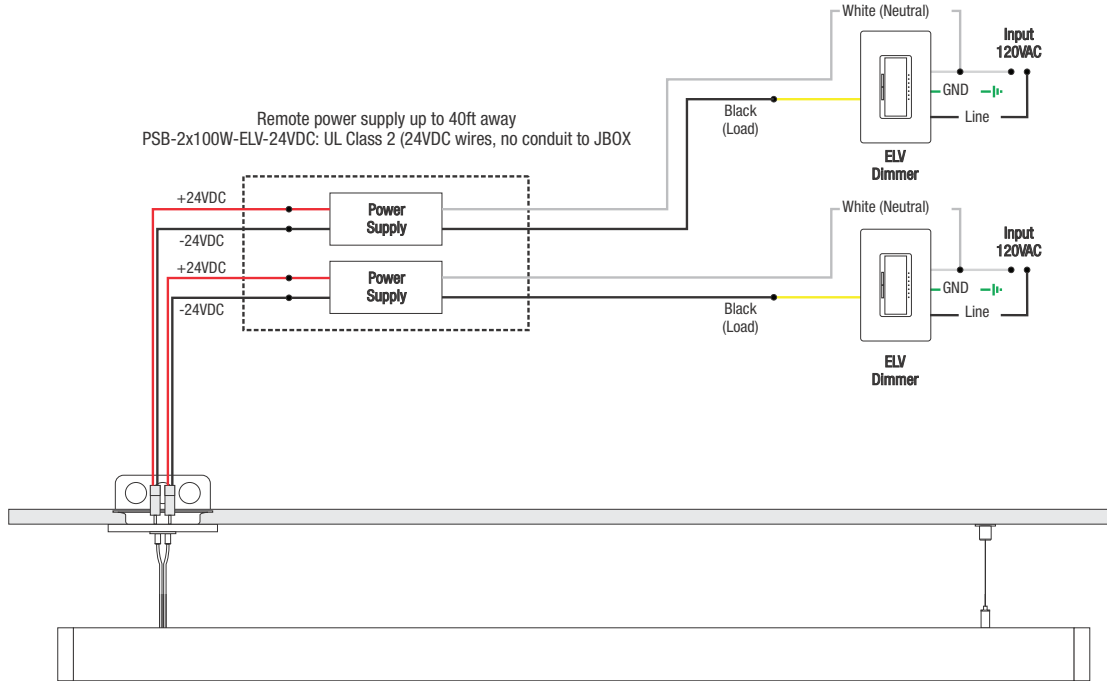

### Wiring Diagram: Wiring diagram for Static White with Dual 0-10 Volt Dimmers

**Application:** 0-10V dimming for Nova Suspension Up and Down with Remote Power - End Feed Canopy, Static White

**Dimming:** Dimmable with 0-10V dimmer: Philips: Sunrise SR1200ZTUNV; Lutron: Diva DVTV-WH, Nova-T NTSTV-DV-XX, Grafix Eye QS QSGRJ-XP, Radio RA2 RRD-1-ND; Leviton: LEV40050, IP710-LFZ; Legrand ADPD4FBL3P2W4

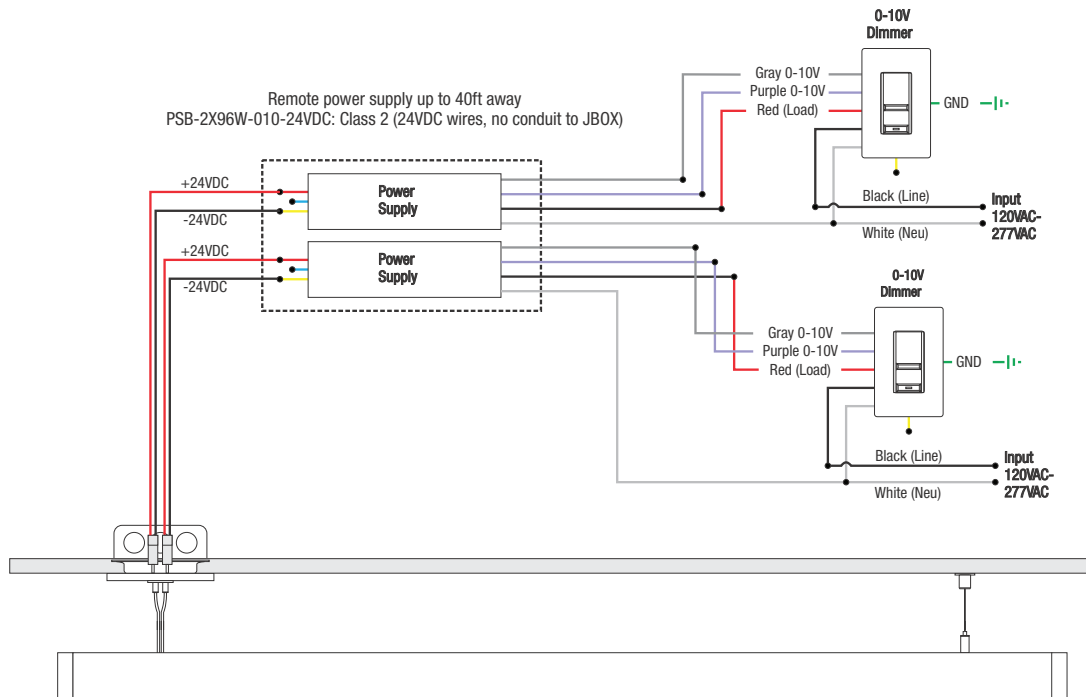

| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|
|---------|--------------|------|


# TM30 DATA

## LED SUSPENSION WITH REMOTE POWER

**TM-30-15 DATA:** The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

**2400K** | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

|         |      | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
| HUE BIN | Rf   | CHROMA           | HUE   |
| 1       | 92.0 | -2.4%            | 1.5%  |
| 2       | 94.7 | -2.1%            | 0.0%  |
| 3       | 95.4 | -1.9%            | -0.1% |
| 4       | 88.7 | -6.7%            | -3.1% |
| 5       | 92.8 | -5.6%            | 1.0%  |
| 6       | 92.7 | -3.4%            | 3.4%  |
| 7       | 89.9 | -4.3%            | 4.1%  |
| 8       | 92.4 | -1.4%            | 4.4%  |
| 9       | 89.0 | -0.6%            | 5.8%  |
| 10      | 88.9 | 0.4%             | 6.2%  |
| 11      | 89.7 | 4.0%             | 5.4%  |
| 12      | 92.6 | 3.0%             | -0.7% |
| 13      | 90.9 | 1.1%             | -7.0% |
| 14      | 89.9 | 0.5%             | -5.8% |
| 15      | 92.1 | -3.2%            | 0.1%  |
| 16      | 88.9 | -1.7%            | -6.3% |

**2700K** | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

|         |      | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
| HUE BIN | Rf   | CHROMA           | HUE   |
| 1       | 88.0 | -4.3%            | 2.6%  |
| 2       | 91.6 | -2.4%            | 2.0%  |
| 3       | 93.7 | -1.4%            | 1.9%  |
| 4       | 88.9 | -5.6%            | -3.1% |
| 5       | 92.3 | -5.5%            | -0.5% |
| 6       | 92.9 | -3.5%            | 0.1%  |
| 7       | 84.5 | -7.5%            | 4.6%  |
| 8       | 90.8 | -3.0%            | 4.4%  |
| 9       | 84.5 | -1.3%            | 8.3%  |
| 10      | 83.9 | 2.0%             | 9.8%  |
| 11      | 87.2 | 5.3%             | 7.1%  |
| 12      | 89.2 | 5.4%             | -2.6% |
| 13      | 88.7 | 0.3%             | -7.8% |
| 14      | 86.8 | 1.7%             | -9.3% |
| 15      | 87.6 | -5.4%            | -1.3% |
| 16      | 83.6 | -3.3%            | -9.5% |

**3000K** | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

|         |      | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
| HUE BIN | Rf   | CHROMA           | HUE   |
| 1       | 92.5 | -3.1%            | 0.3%  |
| 2       | 93.3 | -2.3%            | 1.9%  |
| 3       | 90.9 | -0.8%            | 3.9%  |
| 4       | 94.3 | -1.1%            | 1.4%  |
| 5       | 92.5 | -2.6%            | 1.5%  |
| 6       | 96.4 | 1.2%             | -0.3% |
| 7       | 92.6 | -2.5%            | -0.0% |
| 8       | 96.9 | -1.4%            | 0.2%  |
| 9       | 92.3 | -1.8%            | 4.3%  |
| 10      | 86.6 | -0.7%            | 7.0%  |
| 11      | 86.5 | 2.4%             | 8.2%  |
| 12      | 89.8 | 5.9%             | 1.7%  |
| 13      | 93.9 | 2.6%             | -2.7% |
| 14      | 89.4 | 5.1%             | -5.8% |
| 15      | 90.1 | -0.1%            | -4.7% |
| 16      | 86.5 | 0.3%             | -9.7% |

**3500K** | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

|         |      | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
| HUE BIN | Rf   | CHROMA           | HUE   |
| 1       | 90.8 | -3.8%            | 0.3%  |
| 2       | 92.3 | -2.8%            | 2.1%  |
| 3       | 89.7 | -1.0%            | 4.3%  |
| 4       | 92.6 | -1.4%            | 1.7%  |
| 5       | 91.8 | -3.1%            | 1.3%  |
| 6       | 96.2 | 0.8%             | -0.4% |
| 7       | 92.9 | -3.2%            | 0.2%  |
| 8       | 94.3 | -2.5%            | 1.5%  |
| 9       | 90.4 | -2.5%            | 5.2%  |
| 10      | 84.3 | -1.4%            | 9.5%  |
| 11      | 83.1 | 3.5%             | 9.8%  |
| 12      | 88.2 | 4.8%             | 3.4%  |
| 13      | 94.0 | 2.7%             | -2.0% |
| 14      | 88.7 | 5.9%             | -5.8% |
| 15      | 88.7 | 0.7%             | -5.9% |
| 16      | 86.8 | -0.7%            | -6.7% |

**4000K** | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference


|         |      | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
| HUE BIN | Rf   | CHROMA           | HUE   |
| 1       | 88.9 | -2.4%            | 2.5%  |
| 2       | 93.3 | -0.4%            | 0.8%  |
| 3       | 94.8 | -1.0%            | -0.6% |
| 4       | 87.9 | -4.9%            | -3.6% |
| 5       | 85.3 | -9.4%            | -2.6% |
| 6       | 90.2 | -6.0%            | 0.2%  |
| 7       | 85.3 | -7.6%            | 4.6%  |
| 8       | 83.7 | -4.1%            | 8.2%  |
| 9       | 79.5 | -1.1%            | 13.8% |
| 10      | 78.6 | 1.5%             | 12.1% |
| 11      | 83.5 | 6.4%             | 7.8%  |
| 12      | 90.9 | 3.6%             | -1.1% |
| 13      | 88.3 | 1.7%             | -6.3% |
| 14      | 91.9 | -0.4%            | -2.2% |
| 15      | 84.5 | -0.9%            | -5.5% |
| 16      | 84.7 | -1.1%            | -4.4% |

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

TM30 DATA
LED SUSPENSION WITH REMOTE POWER

TM-30-15 DATA: The data below is for SS5C and SS7C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 89.5 | Rg: 100.8
Color Vector Graphic

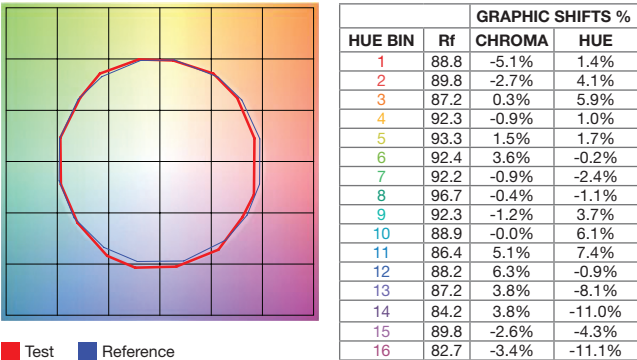

3000D | Rf: 89.8 | Rg: 101.4
Color Vector Graphic

