


PIPELINE PINWHEEL MIYO WITH REMOTE POWER

DESIGN YOUR OWN, STATIC WHITE AND WARM DIM TECHNOLOGY CHANDELIER

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 02.04.21

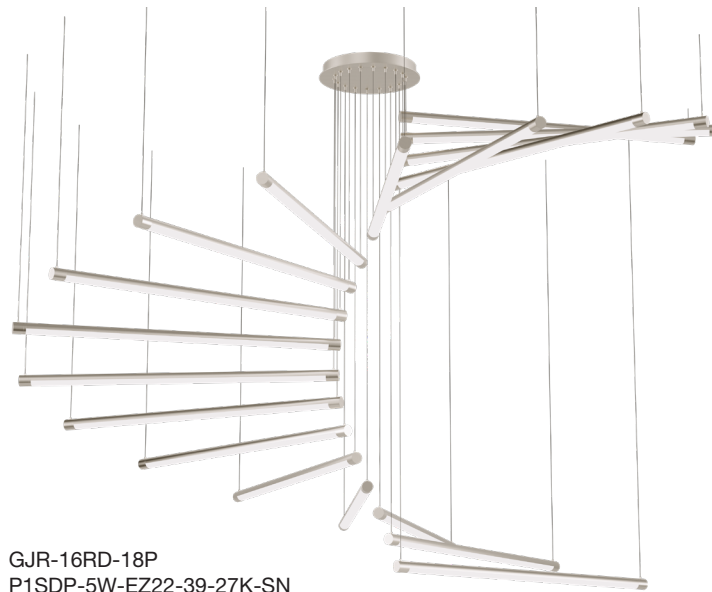


GJR-16RD-18P
P1SDP-5W-EZ22-39-27K-SN

DESCRIPTION

Pipeline MIYO Pin Wheel Chandelier brings together the Pipeline family of fixtures with our innovative Make-It-Your-Own System, allowing you to become the Lighting Designer. Clean, linear channels are artfully suspended, forming beautiful compositions of form, function and style. The Linear LED suspensions produce a continuous beam of light through a Diffused White 176° Lens. Highly customizable, the Pipeline MIYO Pinwheel Chandelier is available in various increments from 39" to 96" per channel and, twelve standard Color Temperatures from 22K-57K, including Warm Dim (27D) or (30D). Available in 5 and 7 watts per foot using our Designer-grade High CRI (color rendering) LED strips. Choose from several finish options and an optional Black or White Louver for additional Diffusion. 24VDC Remote Power Supply is Required and Sold Separately. Fixture includes a 5 year pro-rated warranty. For custom finishes, lengths and layout assistance, send drawings to design@PureEdgeLighting.com. Made in America, Designed By Gregory Kay. Patent Pending.

FINISHES

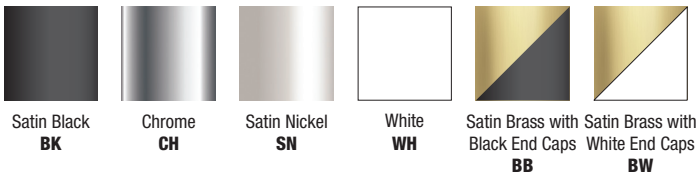

SPECIFICATIONS

Create your own, Mix & Match lengths or keep them all the same

- Compositions: 4, 6, 8, 10, 12, 14 and 18-light
- Length Options: 39"-96" per channel
- Color Temperatures: 2200K-5700K and Warm Dim - 27D or 30D
- High CRI: Up to 95+
- Diffused White lens with 176° beam spread
- Wattage Options: 5 and 7 Watts per foot
- Lumen Output: Up to 585 lm/ft @30K
- Finishes: Satin Black, Chrome, Satin Nickel, White and Satin Brass with Black or White End Caps
- Installation: Fixture is suspended from a singular canopy with coaxial cable at both ends
- 12' or 22' of Adjustable coaxial cable per channel
- Remote Power Supply: Up to 100 Watts

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

- UNI Driver: Universal Dimming (TRIAC, ELV, 0-10V)
- Electronic Low Voltage Dimming (ELV)†
- 0-10V
- Lutron Hi-Lume®

*In-Wall Mounting Kits available for select power supplies

†ELV power supplies are not compatible with nLight, use only 0-10 volt or Universal driver power supplies

APPLICATIONS


Designed for indoor use only. ideal applications include residential, commercial, retail, and hospitality environments

APPROVALS


Damp Location, Class 2 wiring, ETL Listed, Title 24 with Universal Power Supply



SHOWN WITHOUT LOUVER



SHOWN WITH WHITE LOUVER



SHOWN WITH BLACK LOUVER


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE PINWHEEL MIYO WITH REMOTE POWER

DESIGN YOUR OWN, STATIC WHITE AND WARM DIM TECHNOLOGY CHANDELIER


CANOPY ORDERING CODE:

Canopy	Canopy Finish
GJR-12RD-4P	SN
GJR-12RD-6P	BK Satin Black
GJR-12RD-8P	CH Chrome
GJR-12RD-10P	SN Satin Nickel
GJR-16RD-12P	WH White
GJR-16RD-14P	
GJR-16RD-18P	


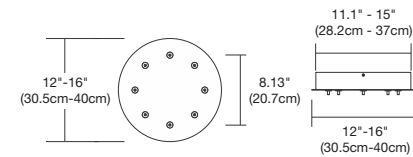


FIXTURE ORDERING CODE:

System	Wattage Per Foot	Fixture Power Feed	Size In Inches (Per Channel)	Color Temperature	Finish
P1SDP	5W	EZ12	39	30K	SN
P1SDP Pipeline 1 Suspension, Diffused Lens without Louver	5W 4.4 Watt	EZ12 12' Adjustable Coaxial Cables (two per channel)	39 72	22K 2200K	BK Satin Black
P1SDWP Pipeline 1 Suspension, Diffused Lens White Louver	7W 7.3 Watt	EZ22 22' Adjustable Coaxial Cables (two per channel)	48 84	24K 2400K	CH Chrome
P1SDBP Pipeline 1 Suspension, Diffused Lens Black Louver			60 96	27K 2700K	SA Satin Aluminum
				27D 2700K Warm Dim*	SN Satin Nickel
				30K 3000K	WH White
				30D 3000K Warm Dim*	BB Satin Brass with Black End Caps
				35K 3500K	BW Satin Brass with White End Caps
				40K 4000K	
				57K 5700K	
				*5W Only	

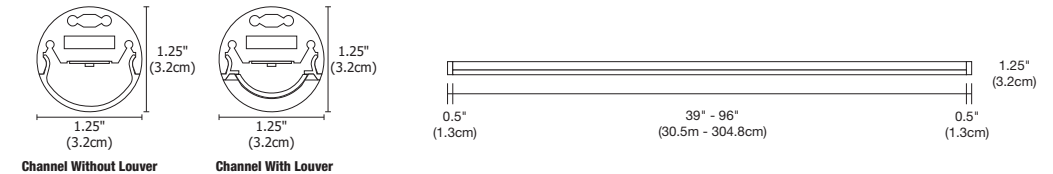

DRAWINGS: Pix Sticks

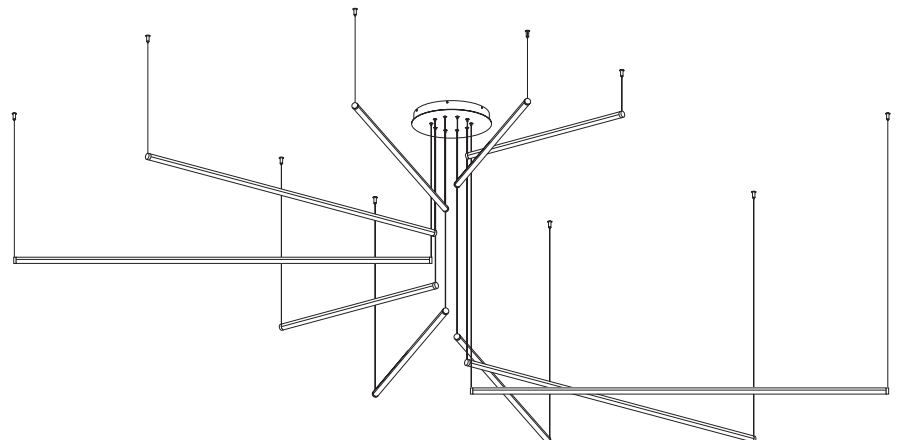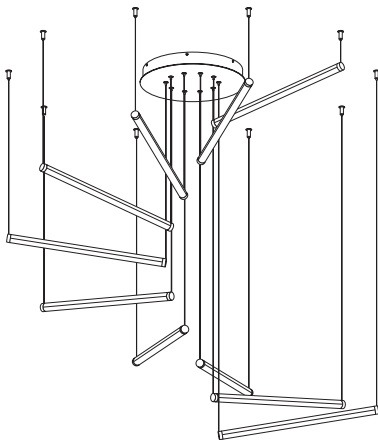

UNIFORM CHANNEL LENGTHS

Ordering Code:

1 X GJR-12RD-10P-SN
5 X P1SDP-5W-EZ12-48-30K-SN

Wattage for power supply:

(48"/12")= 4' X 5W = 20W X 10 = 200 watts
Power supply PSB-3X96-UNI-24VDC

MIXED CHANNEL LENGTHS

Ordering Code:

1 X GJR-12RD-10P-SN
2 X P1SDP-5W-EZ22-39-30K-SN
2 X P1SDP-5W-EZ22-48-30K-SN
2 X P1SDP-5W-EZ22-60-30K-SN
2 X P1SDP-5W-EZ22-72-30K-SN
2 X P1SDP-5W-EZ22-84-30K-SN

Wattage for power supply:

(39"/12") = 3.25' X 5W = 16W X 2 = 32 watts
(48"/12") = 4' X 5W = 20W X 2 = 40 watts
(60"/12") = 5' X 5W = 25W X 2 = 50 watts
(72"/12") = 6' X 5W = 30W X 2 = 60 watts
(84"/12") = 7' X 5W = 35W X 2 = 70 watts
Total = 252 watts
Power supply PSB-3X96-UNI-24VDC

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE PINWHEEL MIYO WITH REMOTE POWER

DESIGN YOUR OWN, STATIC WHITE AND WARM DIM TECHNOLOGY CHANDELIER

NOMINAL LAMP DATA Lamp Data for each Channel Type

	P1SD																
DESCRIPTION	PIX STICKS PIPELINE WITHOUT LOUVER																
WATTS PER FOOT	5w (4.4 watts)									7w (7.3 watts)							
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	
LUMENS PER FOOT (lm/ft)	297	313	329	414	360	453	412	448	476	439	487	535	585	670	729	775	
LUMENS PER WATT (lm/w)	61	68	75	86	82	94	94	102	108	60	66.5	73	80	92	100	106	
CRI	85+	90+	95+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84	

	P1SDW																
DESCRIPTION	PIX STICKS PIPELINE WITH WHITE LOUVER																
WATTS PER FOOT	5w (4.4 watts)									7w (7.3 watts)							
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	
LUMENS PER FOOT (lm/ft)	238	264	290	290	317	317	363	395	420	307	341	375	410	469	510	543	
LUMENS PER WATT (lm/w)	54	60	66	60	72	66	83	90	96	42	46.5	51	56	64	70	74	
CRI	85+	90+	95+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84	

	P1SDBP																
DESCRIPTION	PIX STICKS PIPELINE WITH BLACK LOUVER																
WATTS PER FOOT	5w (4.4 watts)									7w (7.3 watts)							
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	
LUMENS PER FOOT (lm/ft)	136	151	166	181	181	198	208	226	240	219	243.5	268	293	335	364	388	
LUMENS PER WATT (lm/w)	31	34.5	38	38	41	41	47	51	55	30	33.5	37	40	46	50	53	
CRI	85+	90+	95+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84	

*27D, 30D - Warm Dim (4.8 Watts)

ACTUAL LENGTHS: Actual Channel Wattage per Channel

CHANNELS	LENGTH	TOTAL WATTAGE 5 WATTS	TOTAL WATTAGE 7 WATTS
2	39"	32.5	45.5
2	48"	40	56
2	60"	50	70
2	72"	60	84
2	84"	70	98
2	96"	80	112

CHANNELS	LENGTH	TOTAL WATTAGE 5 WATTS	TOTAL WATTAGE 7 WATTS
6	39"	97.5	136.5
6	48"	120	168
6	60"	150	210
6	72"	180	252
6	84"	210	294
6	96"	240	336

3	39"	48.75	68.25
3	48"	60	84
3	60"	75	105
3	72"	90	126
3	84"	105	147
3	96"	120	168

7	39"	113.75	159.25
7	48"	140	196
7	60"	175	245
7	72"	210	294
7	84"	245	343
7	96"	280	392

4	39"	65	91
4	48"	80	112
4	60"	100	140
4	72"	120	168
4	84"	140	196
4	96"	160	224

9	39"	146.25	204.75
9	48"	180	252
9	60"	225	315
9	72"	270	378
9	84"	315	441
9	96"	360	504

5	39"	81.25	113.75
5	48"	100	140
5	60"	125	175
5	72"	150	210
5	84"	175	245
5	96"	200	280

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES

24VDC, UNI - UNIVERSAL DIMMING WITH ELV, TRIAC, & 0-10V


REV 02.04.21

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-40W-UNI-24VDC	PSB-60W-UNI-24VDC	PSB-2X40W-UNI-24VDC	PSB-2X60W-UNI-24VDC
				
SPECIFICATIONS				
MAXIMUM LOAD	40W	60W	2X40W	2X60W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-40W-UNI-24VDC-IW	PSB-60W-UNI-24VDC-IW	PSB-2X40W-UNI-24VDC-IW	PSB-2X60W-UNI-24VDC-IW
UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-96W-UNI-24VDC	PSB-2X96W-UNI-24VDC	PSB-3X96W-UNI-24VDC	PSB-4X96W-UNI-24VDC
				
SPECIFICATIONS				
MAXIMUM LOAD	96W	2X96W	3X96W	4X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-96W-UNI-24VDC-IW	PSB-2X96W-UNI-24VDC-IW	NA	NA
ELV DIMMING & CONTROLS				
LUTRON DIVA: DVELV-300P	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	•
0-10 DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DDTV-WH, DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•
TRIAC DIMMING & CONTROLS				
LUTRON SKYLARK: S2-L-WH	•	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset: short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90
- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
 - Triac Dimmer : (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer : (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supply's used for LED lighting
 - 0-10 Dimmer : Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

IN WALL MOUNTING OPTIONS

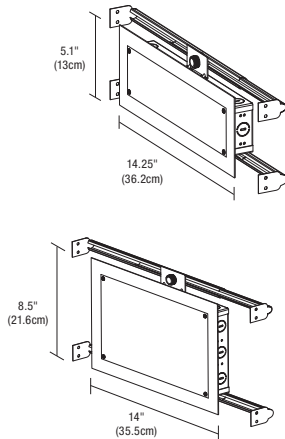

In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.


Ordering Codes 5.1 x 14.25 inch: PSB-40W-UNI-24VDC-IW
PSB-60W-UNI-24VDC-IW
PSB-96W-UNI-24VDC-IW

Ordering Codes 8.5 x 14.25 inch: PSB-2X40W-UNI-24VDC-IW
PSB-2X60W-UNI-24VDC-IW
PSB-2X96W-UNI-24VDC-IW

WIRING DIAGRAMS UNIVERSAL POWER SUPPLY


Application: ELV dimming for Static White and Warm Dim

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

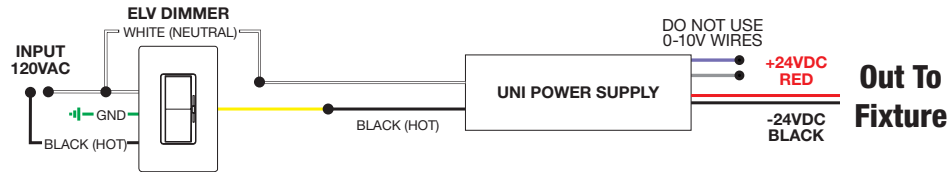

Application: 0-10V dimming for Static White

Dimming: Dimmable with 0-10V dimmer: Philips Sunrise: SR1200ZTUNV; Lutron Diva: DVTV-WH, DVSTV-WH; Lutron Nova T: NTSTV-DV-XX; Lutron Grafix EYE QS: QSGRJ-XP; Lutron Radio Ra2: RRD-10ND; Leviton: LEV40050; Leviton IP710-LFZ; Legrand: ADPD4FBL3P2W4

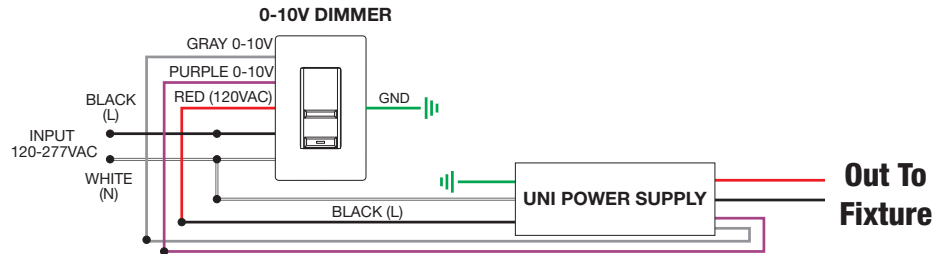

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES


24VDC, LUTRON ECOSYSTEM

REV 02.04.21

LUTRON HI-LUME® PREMIER .1% ECOSYSTEM®†			
ORDERING CODES	L3D0-96W24V-U	2-WIRE ECOSYSTEM LTEA4U1UKL-CV240	3-WIRE ECOSYSTEM L3DA4U1UKL-CV240
			
SPECIFICATIONS			
MAXIMUM LOAD	96W	5W-40W	5W-40W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC
DIMENSIONS	10.5" X 5.5" X 2"	4" X 4.89" X 2.62"	4" X 4.89" X 2.62"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2
DIMMING AND CONTROLS			
RADIO RA2	•	•	•
HOMEWORKS QS	•	•	•
PHPM-3F-120	•	•	•
PHPM-3F-DV	•	•	•
BCI-0-10	•	•	•


†24K - 57K color temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) color temperatures are only compatible with ELV power supplies.

2-Wire EcoSystem Wiring Diagram

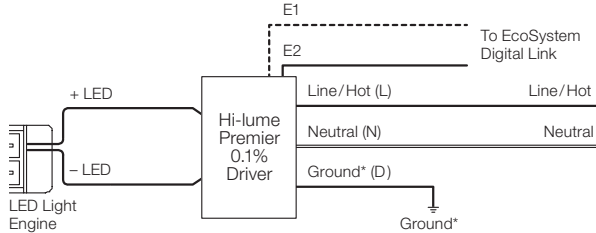

LTEA4U1UKL-CV240

3-Wire Wiring Diagram

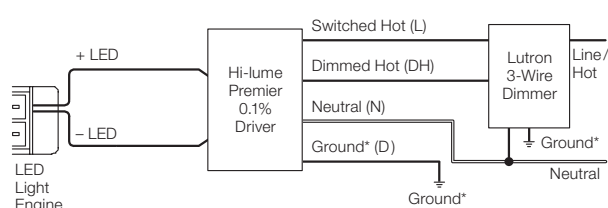

L3DA4U1UKL-CV240

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


SUSPENSION TM30 DATA

DESIGN YOUR OWN, STATIC WHITE AND WARM DIM TECHNOLOGY CHANDELIER

TM-30-15 DATA: The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2200K | Rf: 83.9 | Rg: 94.9

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	77.6	-10.0%	1.8%
2	80.7	-7.5%	7.0%
3	79.5	-2.9%	8.9%
4	90.5	-3.1%	2.4%
5	93.9	-1.3%	1.9%
6	91.9	-0.9%	-0.2%
7	87.6	-6.3%	-2.7%
8	90.5	-5.4%	2.7%
9	83.8	-4.7%	6.5%
10	81.2	-2.5%	10.0%
11	83.3	3.9%	9.4%
12	86.4	5.6%	2.6%
13	86.2	4.5%	-12.4%
14	64.3	-1.0%	-21.9%
15	85.1	-4.4%	-7.5%
16	75.0	-9.9%	-12.0%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	86.4	-5.6%	2.3%
2	89.7	-3.3%	3.1%
3	90.5	-1.5%	3.8%
4	90.0	-4.3%	1.1%
5	92.9	-3.7%	0.2%
6	93.5	-2.5%	-0.8%
7	86.3	-7.2%	2.5%
8	90.7	-4.0%	3.2%
9	85.2	-2.4%	8.1%
10	81.7	0.9%	10.8%
11	85.4	4.5%	8.9%
12	88.7	5.7%	-1.4%
13	88.3	1.3%	-7.9%
14	85.1	2.4%	-10.4%
15	88.1	-4.8%	-2.7%
16	81.7	-4.3%	-10.9%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.9%	-0.3%
2	87.9	-4.4%	4.3%
3	82.9	-1.2%	7.9%
4	89.9	0.6%	4.7%
5	92.7	3.0%	3.5%
6	92.7	3.6%	-1.7%
7	90.8	-1.3%	-4.4%
8	93.7	-2.5%	-2.2%
9	91.7	-3.7%	2.3%
10	85.5	-2.8%	7.8%
11	83.3	0.7%	11.0%
12	86.4	5.5%	3.8%
13	90.6	4.6%	-3.6%
14	85.6	5.9%	-8.4%
15	89.5	-0.6%	-5.7%
16	82.6	-2.7%	-12.0%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	91.7	-1.4%	1.8%
2	94.9	-0.7%	0.4%
3	87.9	-4.5%	-4.1%
4	85.9	-10.3%	-2.7%
5	89.8	-5.2%	-0.4%
6	79.6	-9.5%	6.5%
7	87.6	-4.0%	5.7%
8	81.4	-0.5%	11.8%
9	78.3	3.3%	11.4%
10	85.7	6.3%	6.1%
11	86.3	7.1%	-4.6%
12	86.1	-0.7%	-9.6%
13	85.1	0.8%	-10.4%
14	83.4	-4.1%	-5.3%
15	82.5	-3.6%	-5.7%
16	82.5	-3.6%	-5.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	89.0	-3.1%	2.1%
2	93.2	-0.9%	1.3%
3	94.3	-1.1%	0.7%
4	89.5	-4.0%	-2.3%
5	87.6	-7.8%	-1.8%
6	92.2	-4.6%	0.1%
7	87.4	-6.6%	3.6%
8	85.7	-3.8%	7.0%
9	81.5	-1.3%	12.4%
10	80.0	0.9%	11.4%
11	83.3	5.9%	8.7%
12	89.7	4.8%	-0.3%
13	88.5	2.4%	-6.3%
14	92.7	4.0%	-3.8%
15	86.1	-1.6%	-4.5%
16	85.0	-1.4%	-5.0%

5700K | Rf: 80.3 | Rg: 91.5

Color Vector Graphic



■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	73.8	-11.2%	2.6%
2	83.7	-5.5%	5.8%
3	84.2	-4.0%	5.5%
4	85.8	-3.5%	1.3%
5	85.3	-7.1%	0.6%
6	89.2	-5.8%	-2.2%
7	81.5	-10.7%	1.2%
8	75.7	-9.7%	8.5%
9	74.9	-7.8%	18.8%
10	67.8	-1.6%	18.0%
11	76.1	5.5%	12.0%
12	90.8	4.9%	-1.6%
13	83.6	5.0%	-9.5%
14	81.7	-1.2%	-10.0%
15	69.0	2.0%	-22.8%
16	83.2	-8.5%	-1.0%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


SUSPENSION TM30 DATA

DESIGN YOUR OWN, STATIC WHITE AND WARM DIM TECHNOLOGY CHANDELIER

TM-30-15 DATA: The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%

3000K (2K4K) | Rf: 90.2 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1

Color Vector Graphic



■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--