

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY

REV 02.13.19



Pipeline Stem Mount is a high-grade extruded 1.25" aluminum round profile that may be mounted from a wall, ceiling or table. The fixture rotates 360° and may be ordered in a uniform Linear LED fixture with Louvers or as a Track System. Choose from three different LED Lumen and Wattage outputs, up to 95+ CRI, stem may be mounted 4"-96" off Wall or Ceiling. When mounted over 18" from Wall, Cantilever Cable is provided. It may be ordered with a 2.6" or 4.6" Round Canopy or a special Feed-Thru 3/8" Stem with 2" Cover. Pipeline is powered by a 24VDC Class 2 Remote Power Supply up to 40' away or a small ELV 60 watt Power Supply that fits in the Junction Box at the Wall or Ceiling. Available from 12"-72" (6'). Custom orders may be ordered in 3" increments.



- Electronic Low Voltage Dimming (ELV)
- 0-10 Volt Dimming (0-10V)
- Lutron Hi-lume®

* In-Wall Mounting Kits available for select power supplies

5 year warranty. Assembled in America



BK	CH	SN	WH
Satin Black	Chrome	Satin Nickel	White



Indoor damp or dry locations only. Wall or Ceiling mount used for Hospitality, Retail, and Residential

[illegible]

*Add "W" for Wall Mount
with Cantilever over 18"
(Ex: 36 for 36" Stem
Wall Mounted)

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY


REV 02.13.19

LAMP DATA




	P1SDM																						
DESCRIPTION	176° DIFFUSED WHITE LENS WITHOUT LOUVER																						
WATTS PER FOOT	5W (4.4 Watts)									7W (7.3 Watts)							10W (9.6 Watts)						
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	326.5	362.4	398.3	406.3	435.3	444.1	498.4	541.9	576.8	547.2	607.35	667.5	729.6	835.3	908.3	966.7	709.2	787.2	865.2	945.6	1082.7	1177.2	1252.9
LUMENS PER WATT (lm/w)	74.2	82.35	90.5	84.6	98.9	92.5	113.3	123.2	131.1	75.0	83.2	91.4	99.9	114.4	124.4	132.4	73.9	82	90.1	98.5	112.8	122.6	130.5
CRI	85+	90+	95+	95+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84

*27D, 30D - Warm Dim (4.8 Watts)

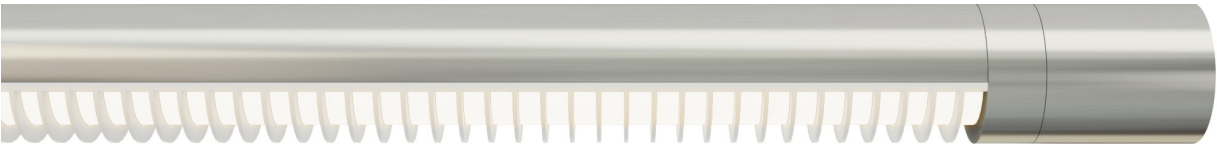


	P1SDWM																						
DESCRIPTION	176° DIFFUSED WHITE LENS WITH WHITE LOUVER																						
WATTS PER FOOT	5W (4.4 Watts)									7W (7.3 Watts)							10W (9.6 Watts)						
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	287.3	318.9	350.5	284	383.1	311	438.6	476.9	507.6	383.0	425.15	467.3	510.7	584.7	635.8	676.7	496.4	551.0	605.6	661.9	757.9	824.1	877.0
LUMENS PER WATT (lm/w)	65.3	72.5	79.7	59	87.1	65	99.7	108.4	115.4	52.5	58.25	64.0	70.0	80.1	87.1	92.7	51.7	57.4	63.1	68.9	78.9	85.8	91.4
CRI	85+	90+	95+	95+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84

*27D, 30D - Warm Dim (4.8 Watts)

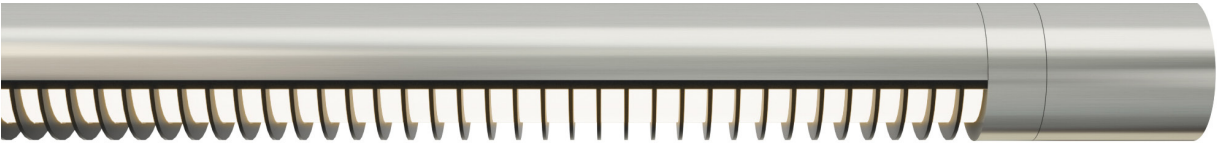

	P1SDBM																						
DESCRIPTION	176° DIFFUSED WHITE LENS WITH BLACK LOUVER																						
WATTS PER FOOT	5W (4.4 Watts)									7W (7.3 Watts)							10W (9.6 Watts)						
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	163.2	181.15	199.1	178	217.6	195	249.2	271.0	288.4	273.6	303.7	333.8	364.8	417.7	454.1	483.3	354.6	393.6	432.6	472.8	541.3	588.6	626.4
LUMENS PER WATT (lm/w)	37.1	41.2	45.3	37	49.5	41	56.6	61.6	65.5	37.5	41.6	45.7	50.0	57.2	62.2	66.2	36.9	41.0	45.1	49.2	56.4	61.3	65.3
CRI	85+	90+	95+	95+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84	85+	90+	95+	95+	90+	84	84

*27D, 30D - Warm Dim (4.8 Watts)

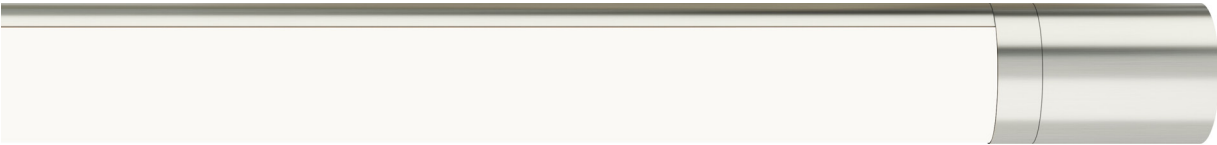

	P2WDP															
DESCRIPTION	PIPELINE 2 WALL VANITY															
WATTS PER FOOT	5W (4.4 Watts)									7W (7.5 Watts)						
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	30D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (lm/ft)	297	313	414	360	453	412	448	476	439	273.6	487	535	585	670	729	775
LUMENS PER WATT (lm/w)	61	68	86	82	94	94	102	108	60	37.5	66	73	80	92	100	106
CRI	85+	90+	95+	95+	95+	85+	90+	90+	85+	85+	90+	95+	95+	90+	90+	84

*27D, 30D - Warm Dim (4.8 Watts)

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER


DESIGNED BY GREGORY KAY

REV 02.13.19

WALL/DISPLAY OR CEILING, SINGLE FIXTURE WITH 2" CANOPY

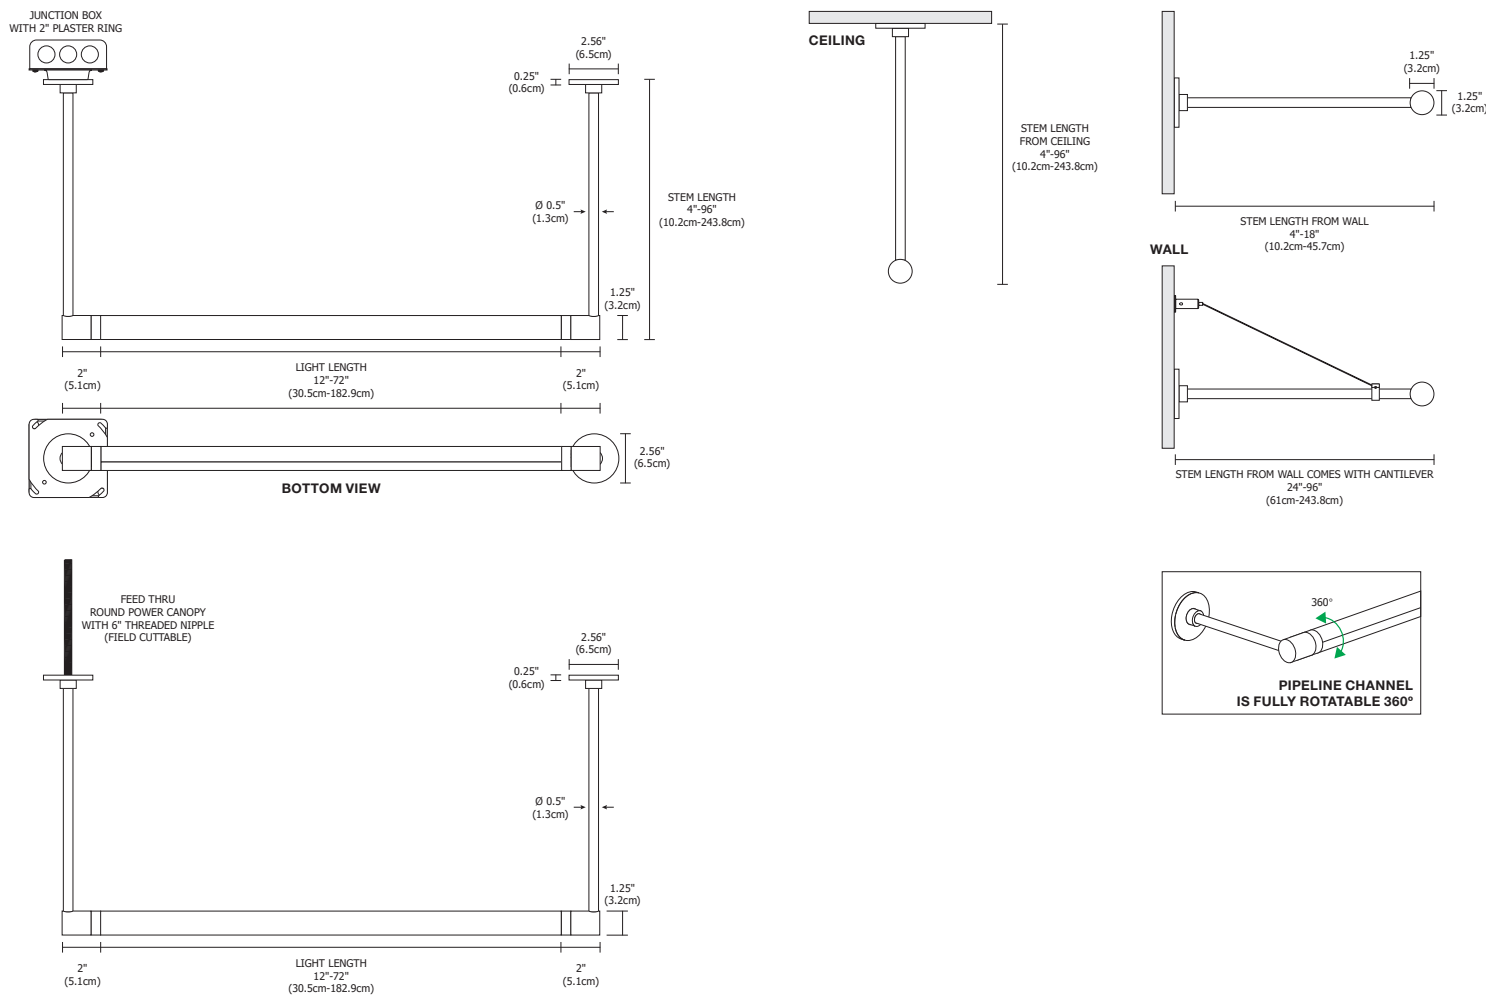

WALL/DISPLAY OR CEILING, SINGLE FIXTURE WITH 4" CANOPY

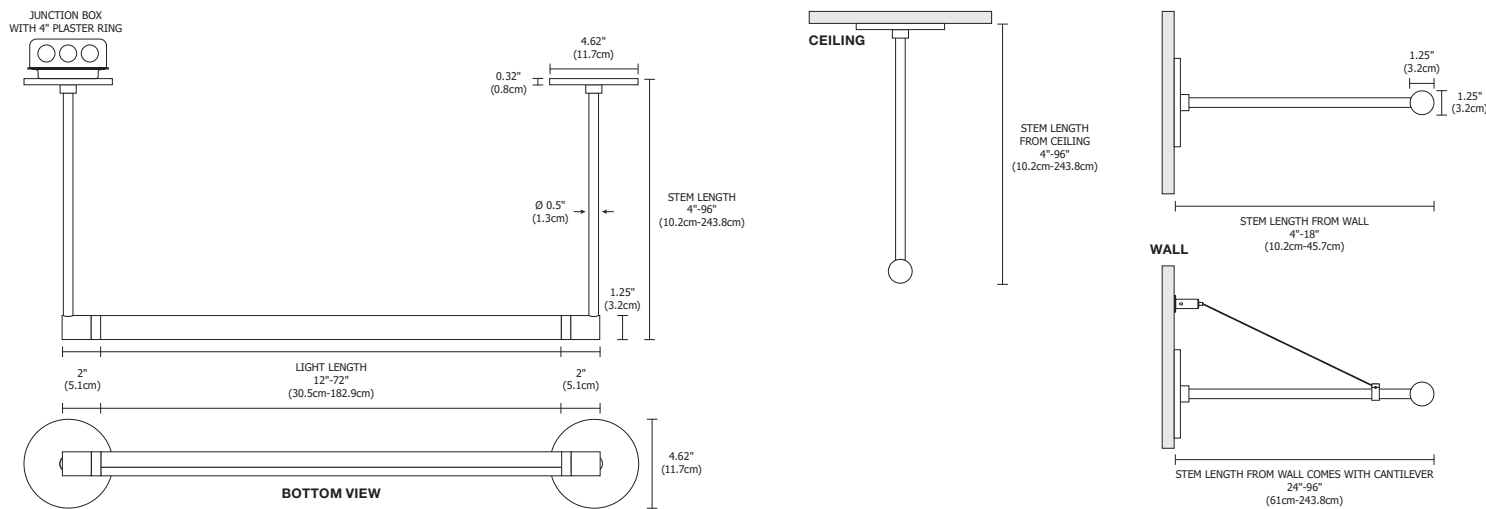

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER



DESIGNED BY GREGORY KAY

REV 02.13.19

LENGTH CHART Actual Lengths for Pipeline Wall/Display or Ceiling

22K, 24K, 27K, 30K, 35K, 40K, & 57K													
Length		5W (4.4 Watts)				7W (7.3 Watts)				10W (9.6 Watts)			
LENS (Inches)	ACTUAL (Inches)	TOTAL WATTAGE	TOTAL LUMENS 3000K	TOTAL LUMENS WHITE LOUVER	TOTAL LUMENS BLACK LOUVER	TOTAL WATTAGE	TOTAL LUMENS 3000K	TOTAL LUMENS WHITE LOUVER	TOTAL LUMENS BLACK LOUVER	TOTAL WATTAGE	TOTAL LUMENS 3000K	TOTAL LUMENS WHITE LOUVER	TOTAL LUMENS BLACK LOUVER
12	13	5	435	383	218	7	730	511	365	10	946	662	473
24	25	10	871	766	435	14	1459	1021	730	20	1891	1324	946
36	37	15	1306	1149	653	21	2189	1532	1094	30	2837	1986	1418
48	49	20	1741	1532	870	28	2918	2043	1459	40	3782	2648	1891
60	61	25	2177	1916	1088	35	3648	2554	1824	50	4728	3310	2364
72	73	30	2612	2299	1305	42	4378	3064	2189	60	5674	3971	2837
84	85	35	3047	2682	1523	49	5107	3575	2554	70	6619	4633	3310
96	97	40	3482	3065	1740	56	5837	4086	2918	80	7565	5295	3782
108	109	45	3918	3448	1958	63	6566	4596	3283	90	8510	5957	4255
120	121	50	4353	3831	2176	70	7296	5107	3648	100	9456	6619	4728

WARM DIM (27D & 30D)					
Length		5W (4.4 Watts)			
LENS (Inches)	ACTUAL (Inches)	TOTAL WATTAGE	TOTAL LUMENS 3000K	TOTAL LUMENS WHITE LOUVER	TOTAL LUMENS BLACK LOUVER
12	13	5	453	317	198
24	25	10	906	634	396
36	37	15	1359	957	594
48	49	20	1812	1268	792
60	61	25	2265	1585	990
72	73	30	2718	1902	1188
84	85	35	3171	2219	1386
96	97	40	3624	2536	1584
108	109	45	4077	2853	1782
120	121	50	4530	3170	1980

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING


SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY

REV 02.13.19


ELV WIRING DIAGRAM

- APPLICATION
- ELV dimming for Pipeline Wall/Display or Ceiling
- POWER SUPPLY
- PSB-96W-010-24VDC (24VDC 96W output)
- DIMMING
- Radio Ra2 (with GRX-TVI), Grafik Eye Qs (with GRX-TVI), Diva (with PP20); Nova T; Philips: Sunrise SR1200ZTUNV; Leviton: IP710-LF

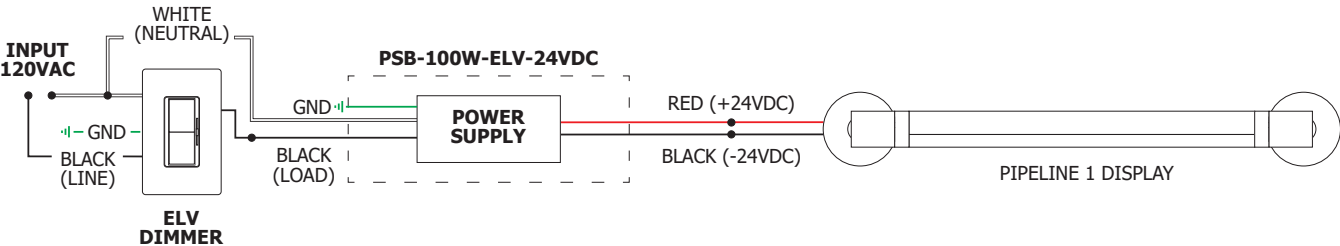

0-10V WIRING DIAGRAM

- APPLICATION
- 0-10V dimming for Pipeline Wall/Display or Ceiling
- POWER SUPPLY
- PSB-96W-010-24VDC (24VDC 96W output)
- DIMMING
- Radio Ra2 (with GRX-TVI), Grafik Eye Qs (with GRX-TVI), Diva (with PP20); Nova T; Philips: Sunrise SR1200ZTUNV; Leviton: IP710-LF

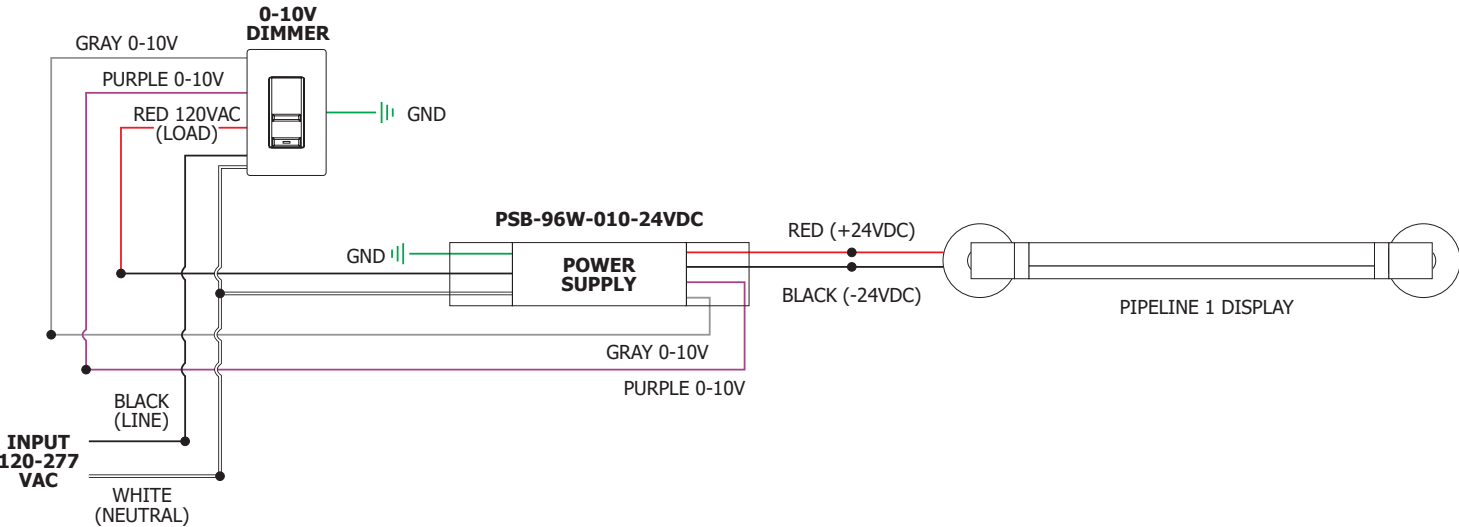

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY


REV 02.13.19

REMOTE POWER SUPPLIES 24VDC ELV Compatible Power Supplies

ELECTRONIC LOW VOLTAGE (ELV) POWER SUPPLIES & RECOMMENDED DIMMERS†					
ORDERING CODE	PSB-60W-24VDC-P-SS	PS-60L-ELV-24VDC	PSB-60W-ELV-24VDC	PSB-2X60W-ELV-24VDC	PSB-100W-ELV-24VDC
					
SPECIFICATIONS					
MAXIMUM LOAD	60W	60W NON-IC, 50W-IC (FITS IN J-BOX)	60W	2X60W	96W
INPUT VOLTAGE	120VAC	120VAC	120VAC	120VAC	120VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	4.5" X 1.96" X 1.2"	2.25" X 1.25" X 0.83"	8.125" X 2" X 1.75"	12.15" X 6.48" X 2.18"	9.25" X 3.5" X 2"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2	CLASS 2
IN-WALL MOUNTING	PSB-60W-24VDC-IW	N/A	PSB-60W-ELV-24VDC-IW	PSB-2X60W-ELV-24VDC-IW	PSB-100W-ELV-24VDC-IW
DIMMING & CONTROLS					
LUTRON DIVA: DVELV-300P	•	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	N/A	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	N/A	•	•	•

ELECTRONIC LOW VOLTAGE (ELV) POWER SUPPLIES & RECOMMENDED DIMMERS†					
ORDERING CODE	PSB-2X100W-ELV-24VDC	PSB-3X100W-ELV-24VDC	PSB-4X100W-ELV-24VDC	PSB-200W-ELV-24VDC	PSB-2X200W-ELV-24VDC
					
SPECIFICATIONS					
MAXIMUM LOAD	2X96W	3X96W	4X96W	200W	2X200W
INPUT VOLTAGE	120VAC	120VAC	120VAC	120VAC	120VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"	12.15" X 6.48" X 2.18"	14" X 10" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	UL1598*	UL1598*
IN-WALL MOUNTING	PSB-2X100W-ELV-24VDC-IW	N/A	N/A	PSB-200W-ELV-24VDC-IW	N/A
DIMMING & CONTROLS					
LUTRON DIVA: DVELV-300P	•	•	•		•
LUTRON SKYLARK: SELV-300P	•	•	•		•
LUTRON RADIO RA2: RRD-6NA	N/A	•	•		•
LUTRON MAESTRO: MAELV-600	•	•	•		•
LEGRAND ADORNE: ADTP-703TUM4	N/A	•	•		•


† 2400K-5700K Color Temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) Color Temperatures are only compatible with ELV Power Supplies.
Classification: UL2108 - * 24VDC over 100 Watts, wires must be in conduit from Remote Power Supply to Junction Box in ceiling.



5.1" X 14.25" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-60W-ELV-24VDC-IW, PSB-100W-ELV-24VDC-IW



8.5" X 14" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-2x60W-ELV-24VDC-IW, PSB-2x100W-ELV-24VDC-IW, PSB-200W-ELV-24VDC-IW

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING


SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

REMOTE POWER SUPPLIES 24VDC 0-10V Compatible Power Supplies (Title 24 Compliant)

0-10V (010) POWER SUPPLIES & RECOMMENDED DIMMERS				
ORDERING CODE	PSB-25W-010-24VDC	PSB-60W-010-24VDC	PSB-96W-010-24VDC	PSB-2X96W-010-24VDC
				
SPECIFICATIONS				
MAXIMUM LOAD	25W	60W	96W	2X96W
INPUT VOLTAGE	120VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)
IN-WALL MOUNTING	PSB-25W-010-24VDC-IW	PSB-60W-010-24VDC-IW	PSB-96W-010-24VDC-IW	PSB-2X96W-010-24VDC-IW
DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•

0-10V (010) POWER SUPPLIES & RECOMMENDED DIMMERS†				
ORDERING CODE	PSB-3X96W-010-24VDC	PSB-4X96W-010-24VDC	PSB-200W-010-24VDC	PSB-2X200W-010-24VDC
				
SPECIFICATIONS				
MAXIMUM LOAD	3X96W	4X96W	200W	2X200W
INPUT VOLTAGE	120-277VAC	120-277VAC	120VAC	120VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	14" X 10" X 3"	17" X 13" X 3"	12.15" X 6.48" X 2.18"	14" X 10" X 3"
CLASSIFICATION	CLASS 2 (TITLE 24 COMPLIANT)	CLASS 2 (TITLE 24 COMPLIANT)	UL1598* (TITLE 24 COMPLIANT)	UL1598* (TITLE 24 COMPLIANT)
IN-WALL MOUNTING	N/A	N/A	PSB-200W-010-24VDC-IW	N/A
DIMMING & CONTROLS				
PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•


Classification: UL2108 - * 24VDC over 100 Watts, wires must be in conduit from Remote Power Supply to Junction Box in ceiling.



5.1" X 14.25" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-25W-010-24VDC-IW, PSB-60W-010-24VDC-IW, PSB-96W-010-24VDC-IW



8.5" X 14" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-2X96W-010-24VDC-IW, PSB-200W-010-24VDC-IW

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY

REV 02.13.19

REQUIRED COMPONENTS 24VDC Lutron Compatible Power Supply

LUTRON HI-LUME® PREMIER .1% ECOSYSTEM® 3-WIRE POWER SUPPLY & RECOMMENDED CONTROLLERS†	
ORDERING CODE	L3D0-96W24V-U 
	SPECIFICATIONS
MAXIMUM LOAD	96W
INPUT VOLTAGE	120-277VAC
OUTPUT VOLTAGE	24VDC
DIMENSIONS	10.5" X 5.5" X 2"
CLASSIFICATION	CLASS 2
	DIMMING & CONTROLS
RADIO RA2	•
HOMEWORKS QS	•
PHPM-3F-120	•
PHPM-3F-DV	•
BCI-0-10	•

† 2400K-5700K Color Temperatures are compatible with 0-10V, ELV, and Lutron Hi-lume® Power Supplies. Warm Dim (27D, 30D) Color Temperatures are only compatible with ELV Power Supplies.

PIPELINE® WALL/DISPLAY OR CEILING

SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER

DESIGNED BY GREGORY KAY


REV 02.13.19

TM-30-15 DATA

The data below is for SS5C and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2200K | Rf: 83.9 | Rg: 94.9

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	77.6	-10.0%	1.8%
2	80.7	-7.5%	7.0%
3	79.5	-2.9%	8.9%
4	90.5	-3.1%	2.4%
5	93.9	-1.3%	1.9%
6	91.9	-0.9%	-0.2%
7	87.6	-6.3%	-2.7%
8	90.5	-5.4%	2.7%
9	83.8	-4.7%	6.5%
10	81.2	-2.5%	10.0%
11	83.3	3.9%	9.4%
12	86.4	5.6%	2.6%
13	86.2	4.5%	-12.4%
14	64.3	-1.0%	-21.9%
15	85.1	-4.4%	-7.5%
16	75.0	-9.9%	-12.0%

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	81.1	-7.7%	3.0%
2	84.9	-5.7%	4.9%
3	85.3	-2.3%	6.1%
4	87.7	-5.5%	-0.5%
5	92.5	-3.9%	0.5%
6	91.1	-3.4%	0.1%
7	86.0	-7.7%	0.5%
8	87.1	-6.0%	4.3%
9	80.1	-3.9%	9.8%
10	79.0	-0.9%	11.8%
11	82.3	5.5%	10.1%
12	87.6	5.4%	-0.5%
13	84.7	3.3%	-12.0%
14	78.0	0.8%	-13.7%
15	86.9	-5.5%	-4.3%
16	78.1	-7.5%	-10.8%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	86.4	-5.6%	2.3%
2	89.7	-3.3%	3.1%
3	90.5	-1.5%	3.8%
4	90.0	-4.3%	1.1%
5	92.9	-3.7%	0.2%
6	93.5	-2.5%	-0.8%
7	86.3	-7.2%	2.5%
8	90.7	-4.0%	3.2%
9	85.2	-2.4%	8.1%
10	81.7	0.9%	10.8%
11	85.4	4.5%	8.9%
12	88.7	5.7%	-1.4%
13	88.3	1.3%	-7.9%
14	85.1	2.4%	-10.4%
15	88.1	-4.8%	-2.7%
16	81.7	-4.3%	-10.9%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.9%	-0.3%
2	87.9	-4.4%	4.3%
3	82.9	-1.2%	7.9%
4	89.9	0.6%	4.7%
5	92.7	3.0%	3.5%
6	92.7	3.6%	-1.7%
7	90.8	-1.3%	-4.4%
8	93.7	-2.5%	-2.2%
9	91.7	-3.7%	2.3%
10	85.5	-2.8%	7.8%
11	83.3	0.7%	11.0%
12	86.4	5.5%	3.8%
13	90.6	4.6%	-3.6%
14	85.6	5.9%	-8.4%
15	89.5	-0.6%	-5.7%
16	82.6	-2.7%	-12.0%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	86.6	-4.2%	3.4%
2	91.7	-1.4%	1.8%
3	94.9	-0.7%	0.4%
4	87.9	-4.5%	-4.1%
5	85.9	-10.3%	-2.7%
6	89.8	-5.2%	-0.4%
7	79.6	-9.5%	6.5%
8	87.6	-4.0%	5.7%
9	81.4	-0.5%	11.8%
10	78.3	3.3%	11.4%
11	85.7	6.3%	6.1%
12	86.3	7.1%	-4.6%
13	86.1	-0.7%	-9.6%
14	85.1	0.8%	-10.4%
15	83.4	-4.1%	-5.3%
16	82.5	-3.6%	-5.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	89.0	-3.1%	2.1%
2	93.2	-0.9%	1.3%
3	94.3	-1.1%	0.7%
4	89.5	-4.0%	-2.3%
5	87.6	-7.8%	-1.8%
6	92.2	-4.6%	0.1%
7	87.4	-6.6%	3.6%
8	85.7	-3.8%	7.0%
9	81.5	-1.3%	12.4%
10	80.0	0.9%	11.4%
11	83.3	5.9%	8.7%
12	89.7	4.8%	-0.3%
13	88.5	2.4%	-6.3%
14	92.7	4.0%	-3.8%
15	86.1	-1.6%	-4.5%
16	85.0	-1.4%	-5.0%


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

PIPELINE® WALL/DISPLAY OR CEILING
SINGLE, STEM MOUNTED, 24VDC - REMOTE POWER


TM-30-15 DATA

The data below is for SS5C and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

5700K | Rf: 80.3 | Rg: 91.5
Color Vector Graphic

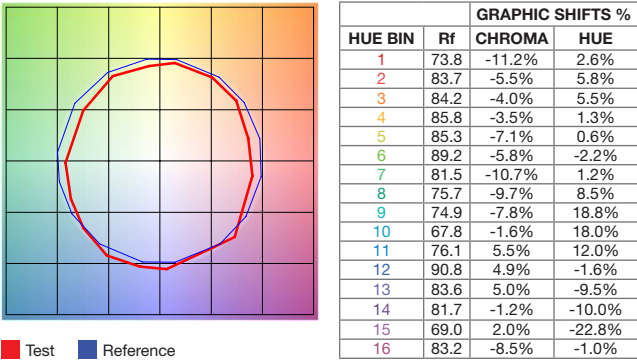

2700D | Rf: 89.5 | Rg: 100.8
Color Vector Graphic

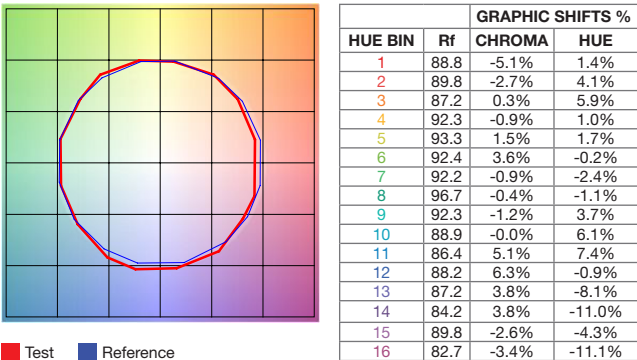

3000D | Rf: 89.8 | Rg: 101.4
Color Vector Graphic

