

PURE SMART TRUCOLOR™ G25-E26-9W-RGBTW

120V, 9 WATT WI-FI ENABLED SMART LAMP





REV 04.03.25



DESCRIPTION

The Pure Smart Wi-Fi enabled G25 smart lamp uses TruColor™ RGBTW Technology – With 5 channels (Red, Green, and Blue + Tunable White) of proprietary color mixing we create over 16 million vivid saturated colors and pastels along with 85,000 tunable white tones. Promote a healthy Circadian rhythm and experience the beauty of natural white in its purest form. Tunable White ranges from 1500K-6500K. TruColor™ RGBTW4K delivers a tunable range from 2000K to 4000K, allowing for greater fine-tuning of warm white tones using the Pure Smart room controller or remote. Bring out the best of your world by saturating it in 96+ CRI light with TruColor™ Technology. Dial in just the right ambiance for any occasion just by changing the preset color mode. Harness the beauty of the sunset and paint your living room with the amber glow of the golden hour. Experience life in TruColor™.

- Controls Easily control from anywhere with the WiZ app or with the WiZ Pro Dashboard on your computer. At home, experience the convenience of voice control with Alexa or Google Home.
- Wall Controller On/Off, Dimming, CCT selection, and scene control.
 Must use Pure Smart CWW-TW-SCENE-WH wall controller or Wall/Table
 Battery Remote Controller CWR-TW-SCENE-WH (Sold Separately).
- WiZ SpaceSense[™] Wi-Fi sensing technology that detects motion from disruptions in the Wi-Fi signal and triggers the lights to turn on or off when you enter or exit the room. *Not compatible with mesh networks.
- Schedule & Automation Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance.
- Wi-Fi/Bluetooth Easily setup over Wi-Fi or Bluetooth. No hub required.
- 3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

DIMMING & CONTROLS (SOLD SEPARATELY)


- Home Integration Solutions
- Pure Smart™ 5 Channel Wi-Fi Controller
- Pure Smart™ Battery Operated Remote Wi-Fi Controller

SPECIFICATIONS

APP	WiZ Mobile App
WI-FI/BLUETOOTH	Easily setup over Wi-Fi or Bluetooth. No hub required. 2.4GHz 802.11b/g/n WPA3 Personal
BULB SHAPE	G25
BASE TYPE	E26
WATTAGE	9 Watts
WATTAGE EQUIVALE	NCY 60 Watt Incandescent
INPUT VOLTAGE	120 Volt
FREQUENCY	60 Hz
COLOR TEMPERATU	from 1500K-6500K
	 RGBTW4K: Red, Blue, Green, Tunable White from 2000K-4000K
LUMENS	1036 Lumens at 3000K
CRI	96+ CRI at 3000K
EFFICACY	116 lumens per watt at 3000K
DUV	.00021 average across 2000K-5500K
RF	93 average across 2000K-5500K
RG	100 average across 2000K-5500K
R9	91 average across 2000K-5500K
LOCATION	Indoor only, rated for use in enclosed and open air fixtures in dry or damp locations
MATERIAL	Polycarbonate
OPTICAL	Frosted Lens
L70 LIFESPAN	30,000 Hours
TITLE 20 COMPLIAN	CE Meets Title 20 regulations and standards for efficiency. Suitable for use in California
WARRANTY	3 years/30,000 hours

APPLICATIONS

Ideal applications in residential, commercial, retail, and hospitality environments.



PROJECT FIXTURE TYPE DATE



PURE SMART TRUCOLOR™ G25-E26-9W-RGBTW

120V, 9 WATT WI-FI ENABLED SMART LAMP

PURE FOGE




REV 04.03.25

NOMINAL LAMP DATA

DESCRIPTION	G25 SMART LAMP										
WATTS	9W										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K		
LUMENS (Im)	585	629	811	932	1036	1061	1024	904	832		
LUMENS PER WATT (Im/w)	87	92	108	119	126	129	128	121	117		
CRI	93	94	95	93	96	96	94	92	94		
Duv	0.0003	0.002	0.0002	0.0002	0.0016	0.0006	0	0.0042	0.0018		
Rf	87	85	90	92	93	94	93	94	94		
Rg	99	95	101	103	103	102	102	105	104		
R9	90	96	90	91	90	90	90	95	90		
R13	90	88	93	95	97	99	100	97	97		
R15	98	95	98	98	99	99	98	95	94		
WATTS	6.7	6.8	7.5	7.8	8.2	8.2	8	7.5	7.1		

R1-R15 CRI CHART @ 3000K 96 CRI

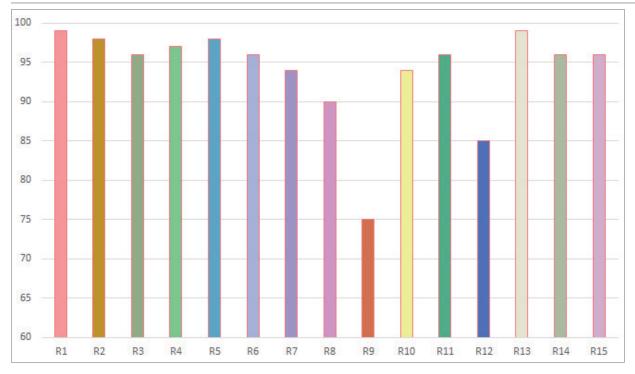

PROJECT FIXTURE TYPE DATE







REV 04.03.25

TM-30-15 DATA: The data below is for Pure Smart TruColor™ RGBTW Lamps.


2000K (TruColor™ RGBTW)



2200K (TruColor™ RGBTW)




2400K (TruColor™ RGBTW)




2700K (TruColor™ RGBTW)

View Angle: 2 Deg




3000K (TruColor™ RGBTW)

View Angle: 2 Deg




3500K (TruColor™ RGBTW)

View Angle: 2 Deg




4000K (TruColor™ RGBTW)

View Angle: 2 Deg




5700K (TruColor™ RGBTW)

View Angle: 2 Deg



6500K (TruColor™ RGBTW)

View Angle: 2 Deg



PROJECT FIXTURE TYPE DATE