

PURE SMART TRUCOLOR™ MR16-GU5.3-4W-XWF-RGBTW

12V, 4 WATT WI-FI ENABLED SMART LAMP



DESCRIPTION

The Pure Smart Wi-Fi enabled MR16, GU5.3 base lamp uses TruColor™ RGBTW Technology – With 5 channels (Red, Green, and Blue + Tunable White) of proprietary color mixing we create over 16 million vivid saturated colors and pastels along with 85,000 tunable white tones. Promote a healthy Circadian rhythm and experience the beauty of natural light in its purest form. Tunable White ranges from 1500K to 6500K. TruColor™ RGBTW4K delivers a tunable range from 2000K to 4000K, allowing for greater fine-tuning of warm white tones using the Pure Smart room controller or remote. Bring out the best of your world by saturating it in 97+ CRI light with TruColor™ Technology. Dial in just the right ambiance for any occasion just by changing the preset color mode. Harness the beauty of the sunset and paint your living room with the amber glow of the golden hour. Experience life in TruColor™.

- Controls - Easily control from anywhere with the WiZ app or with the WiZ Pro Dashboard on your computer. At home, experience the convenience of voice control with Alexa or Google Home. Take control to the next level by utilizing the available wall controls.
- Wall Controller - On/Off, Dimming, CCT selection, and scene control. Must use Pure Smart **CWW-TW-SCENE-WH** wall controller or Wall/Table Battery Remote Controller **CWR-TW-SCENE-WH** (Sold Separately).
- WiZ SpaceSense™ - Wi-Fi sensing technology that detects motion from disruptions in the Wi-Fi signal and triggers the lights to turn on or off when you enter or exit the room. *Not compatible with mesh networks.
- Schedule & Automation - Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance.
- Wi-Fi/Bluetooth - Easily setup over Wi-Fi or Bluetooth. No hub required.
- 3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

DIMMING & CONTROLS (SOLD SEPARATELY)

- [Home Integration Solutions](#)
- [Pure Smart™ 5 Channel Wi-Fi Controller](#)
- [Pure Smart™ Battery Operated Remote Wi-Fi Controller](#)

SPECIFICATIONS

APP	WiZ Mobile App
WI-FI/BLEETOOTH	Easily setup over Wi-Fi or Bluetooth. No hub required. 2.4GHz 802.11b/g/n WPA3 Personal
BULB SHAPE	MR16
BASE TYPE	GU5.3
WATTAGE	4 Watts
WATTAGE EQUIVALENCY	40 watt Incandescent, 28 watt Halogen
INPUT VOLTAGE	12 Volts AC
FREQUENCY	60 Hz
COLOR TEMPERATURE	RGBTW: Red, Blue, Green, Tunable White from 1500K-6500K RGBTW4K: Red, Blue, Green, Tunable White from 2000K-4000K
LUMENS	386 Lumens at 3000K
CRI	97 CRI at 3000K
EFFICACY	94 lumens per watt
DUV	.0003 average across 2000K-5500K
RF	92 average across 2000K-5500K
RG	102 average across 2000K-5500K
R9	84 average across 2000K-5500K
SCHEDULES & AUTOMATION	Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance
LOCATION	Indoor, damp location. Suitable for use in enclosed and open fixtures
MATERIAL	Polycarbonate
OPTICAL	Frosted Lens
L70 LIFESPAN	30,000 Hours
TITLE 20 COMPLIANCE	Meets Title 20 regulations and standards for efficiency. Suitable for use in California
WARRANTY	3 years/30,000 hours

APPLICATIONS

Ideal applications in residential, commercial, retail, and hospitality environments.

Product	Base	Wattage	Beam Spread	Color Temperature
MR16	GU5.3	4W	XWF	RGBTW
MR16 MR16 Smart Lamp	GU5.3 GU5.3 12VAC	4W 4 Watts	XWF Extra Wide Flood	RGBTW Red, Blue, Green, Tunable White from 1500K-6500K RGBTW4K Red, Blue, Green, Tunable White from 2000K-4000K

TM30 DATA

12V, 4 WATT WI-FI ENABLED SMART LAMP




REV 04.03.25

NOMINAL LAMP DATA

DESCRIPTION	MR16 SMART LAMP								
WATTS	4W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS (lm)	210	223	250	270	284	277	393	322	260
LUMENS PER WATT (lm/w)	47	50	56	60	63	64	79	67	55
CRI	94	94	95	96	96	97	93	96	96
Duv	0.0006	0.0021	0.0031	0.0039	0.0036	0.0021	0.0002	0.0016	0.0013
Rf	90	92	92	92	92	92	90	92	90
Rg	101	104	105	105	104	102	99	102	103
R9	80	85	87	90	91	90	65	90	96
R13	99	97	99	99	100	98	94	94	90
R15	94	92	95	97	98	96	91	91	86
WATTS	4.5	4.5	4.5	4.5	4.5	4.3	5	4.8	4.7

R1-R15 CRI CHART @ 3000K 97 CRI

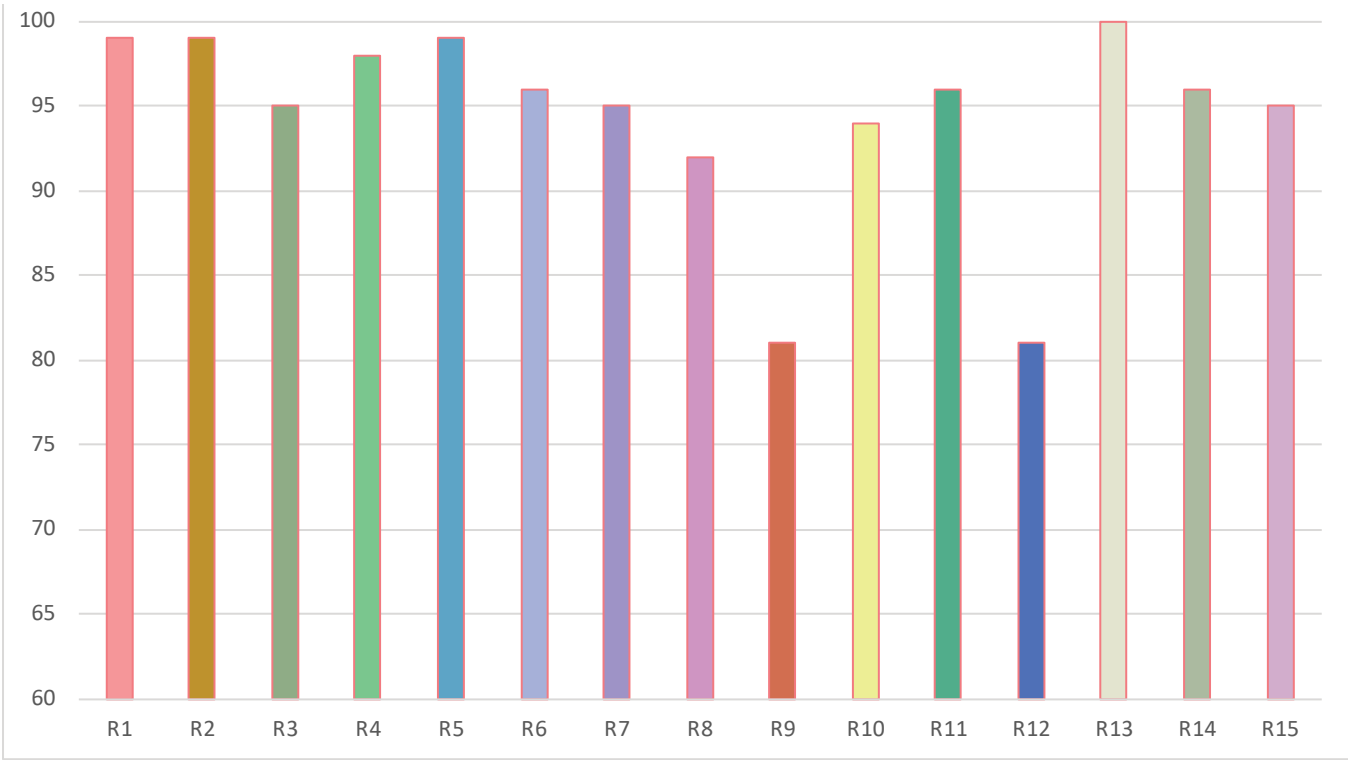


TM30 DATA

12V, 4 WATT WI-FI ENABLED SMART LAMP

TM-30-15 DATA: The data below is for Pure Smart TruColor™ RGBTW Lamps.


2000K (TruColor™ RGBTW)

View Angle: 2 Deg

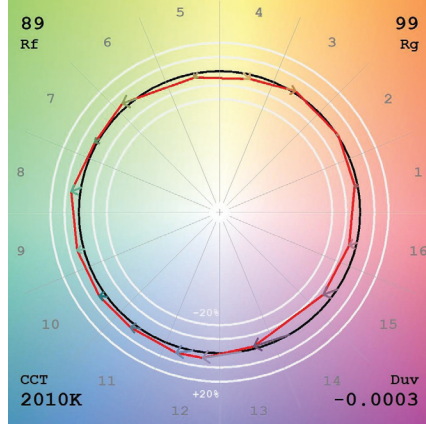


2200K (TruColor™ RGBTW)

View Angle: 2 Deg

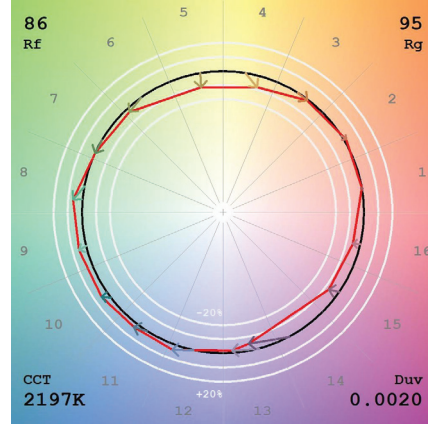


2400K (TruColor™ RGBTW)

View Angle: 2 Deg

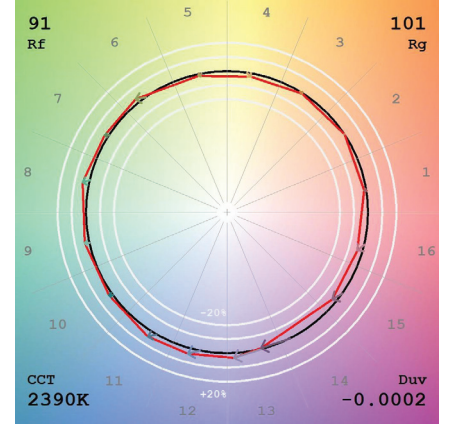


2700K (TruColor™ RGBTW)

View Angle: 2 Deg

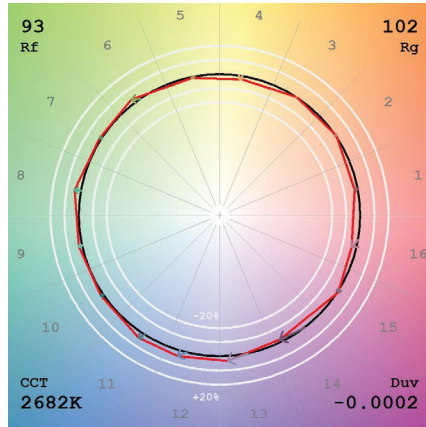


3000K (TruColor™ RGBTW)

View Angle: 2 Deg

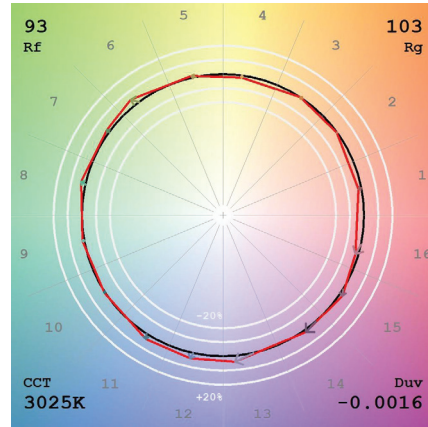


3500K (TruColor™ RGBTW)

View Angle: 2 Deg

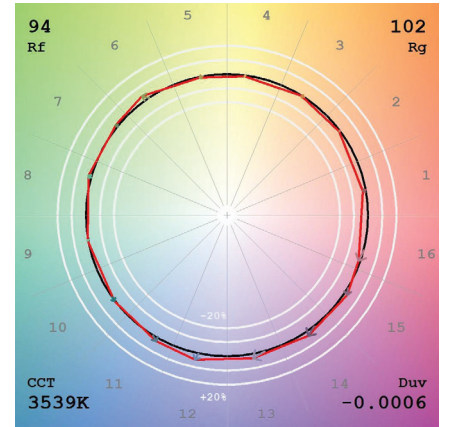


4000K (TruColor™ RGBTW)

View Angle: 2 Deg

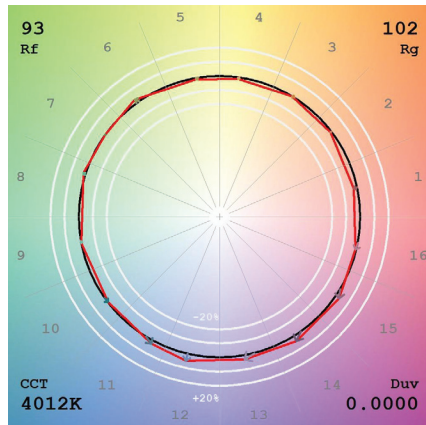


5700K (TruColor™ RGBTW)

View Angle: 2 Deg

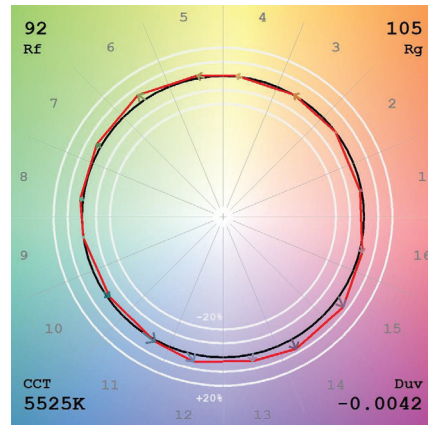

6500K (TruColor™ RGBTW)

View Angle: 2 Deg

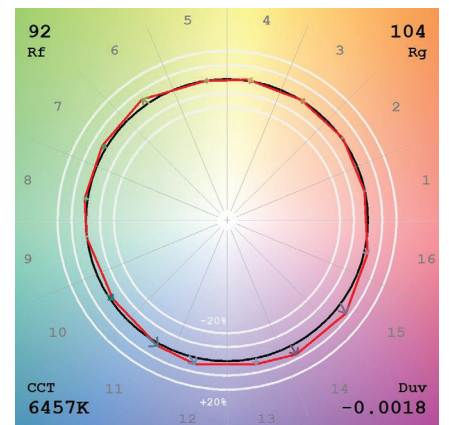

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--