

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

ASSEMBLED IN AMERICA

REV 09.08.26



(D) Diffused Lens in Rigid Tubing

DESCRIPTION

Solina 360 is available in virtually unlimited custom lengths and shapes—including rings, squares, rectangles, ovals, and fully custom configurations—Solina 360 gives designers complete creative freedom while maintaining seamless, continuous illumination.

Designed to offer both a sophisticated aesthetic and an inviting ambiance, Solina 360 enhances interiors with its fluid, seamless flow. Choose from Static White, Warm Dim (27D & 30D), Tunable White (2K4K & 27K6), or TruColor RGBTW which is our premier light engine with a wide spectrum from 1500K-6500K and exceptional color rendering (96+ CRI). TruColor RGBTW takes Tunable White to the next level. With the addition of the red, green, and blue channels to the Tunable White, delivering exceptional color accuracy, rendering, and performance beyond traditional Tunable White systems. TruColor can be controlled with either DMX or WiZ Pro wireless controls. With flexible configuration options and precision engineering, Solina 360 serves as both a functional lighting solution and a design statement, making it the perfect solution for a wide range of applications. Solina 360 is both a high-performance lighting system and a striking architectural design element. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

LUMEN PERFORMANCE AT 3000K (D)

7W LUMEN OUTPUT	1114 lm/ft	EFFICIENCY	148 lm/watt
CRI	93	Rg	98
BEAM ANGLE	360°	BEAM TOLERANCE	+/- 30CCT

SPECIFICATIONS

DIMENSIONS	DIA: C & D = 1.2"
INPUT	24VDC with 5" leads
POWER SUPPLIES	Remote 24VDC power supply required
POWER CONSUMPTION	3, 5, or 7 watts per foot
MATERIAL	UV Resistant Silicon
OPERATING TEMPERATURE	-4° F (-20° C) to 122° F (+50° C)
AVERAGE LED LIFE	50,000 hrs
WARRANTY	5 Year pro-rated

LAMP

- Static White Color Temperatures ranging from **2400K** through **4000K**
- Warm Dim: **27D & 30D** dim down to 1800K, resembling halogen light sources
- Tunable White: **2K4K** and **27K6** grant independent control for adjusting color temperature and intensity
- **TruColor™ RGBTW** Dynamic RGB with Tunable White 1500K-6500K

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

Static White

- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)
- [UNI Driver: Universal Dimming \(ELV, TRIAC, 0-10V\)](#)
ELV & TRIAC [Smart Dimmer & Switch](#)
- [2-in-1 96W Power Supply and Wall Dimmer](#)

Warm Dim

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- [Make It Smart: Pure Smart™ Wi-Fi Dimmer](#)
- [2-in-1 96W Power Supply and Wall Dimmer](#)

Tunable White

- [0-10V](#): Requires two dimmers, one for intensity and one for color temperature
- [DMX & Controls](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)
- [2-in-1 Power Driver and Dimmer](#)

RGBTW

- [Home Integration Solutions](#)
- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

*In-wall mounting and drop ceiling kits available for select power supplies

COMPLIANCE

*Title 24 JA8 compliant for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Assembled in USA.

APPLICATIONS

Designed for indoor use only. Ideal applications include general lighting, residential, commercial, retail, and hospitality environments.

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

360 LENS OPTIONS



(C) Cora Weave Rigid Tube



(D) Diffused Rigid Tube

COVER FINISHES



Black



Polished Nickel



Satin Nickel




Satin Brass



Matte White
RAL 9003

360 ILLUMINATION

Cora Weave or Diffused Lens




Ø1.2" (3cm)
 C & D



Solina Horizontal Suspension

SOLINA FLUSH MOUNT CEILING PORT VERTICAL

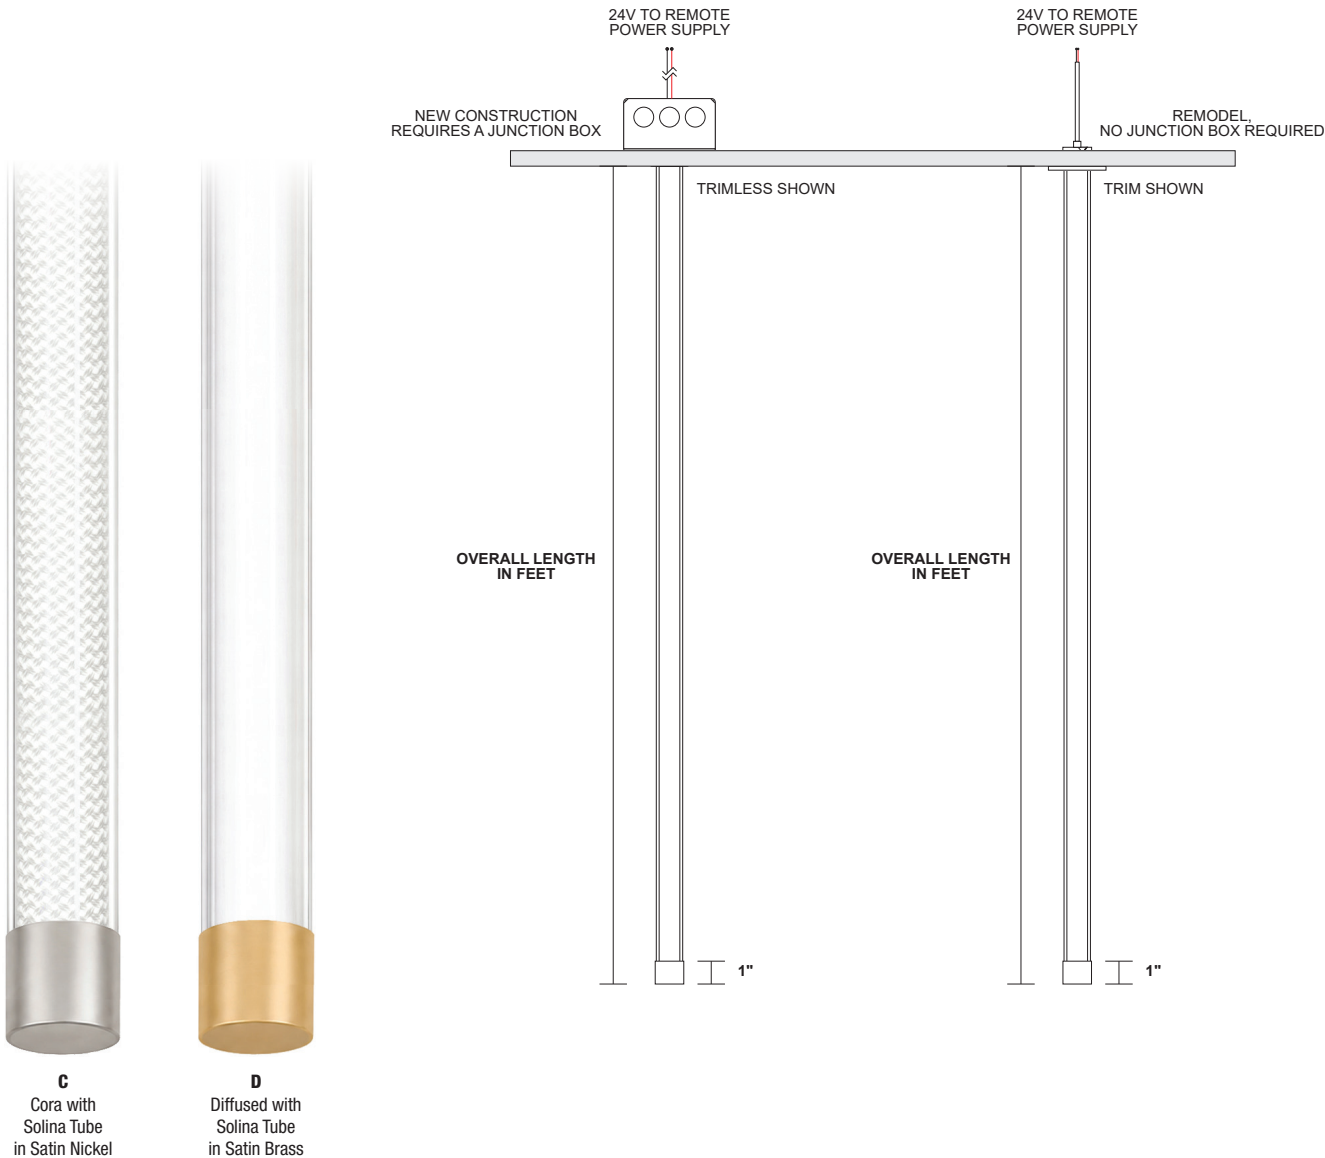


System	Type	Wattage	Overall Length in Feet*	Color Temperature	Finish*
SCVR	C	5W	5FT	2K4K	SN
SCVR Solina Ceiling Vertical, 24VDC Remote Power Supply required	C 1" Cora Flex 360 inside Solina 1.2" Clear Straight Tube D 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	1-8FT Order in various increments from 1 - 8 feet	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K* Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** * L add L after End Cap finish for Trimless Plaster-in Canopy
		*Only available in Static White color temperatures	*Custom lengths available upon request	*5 Watts	**RAL/ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

SOLINA SUSPENSION VERTICAL MONOPOINT

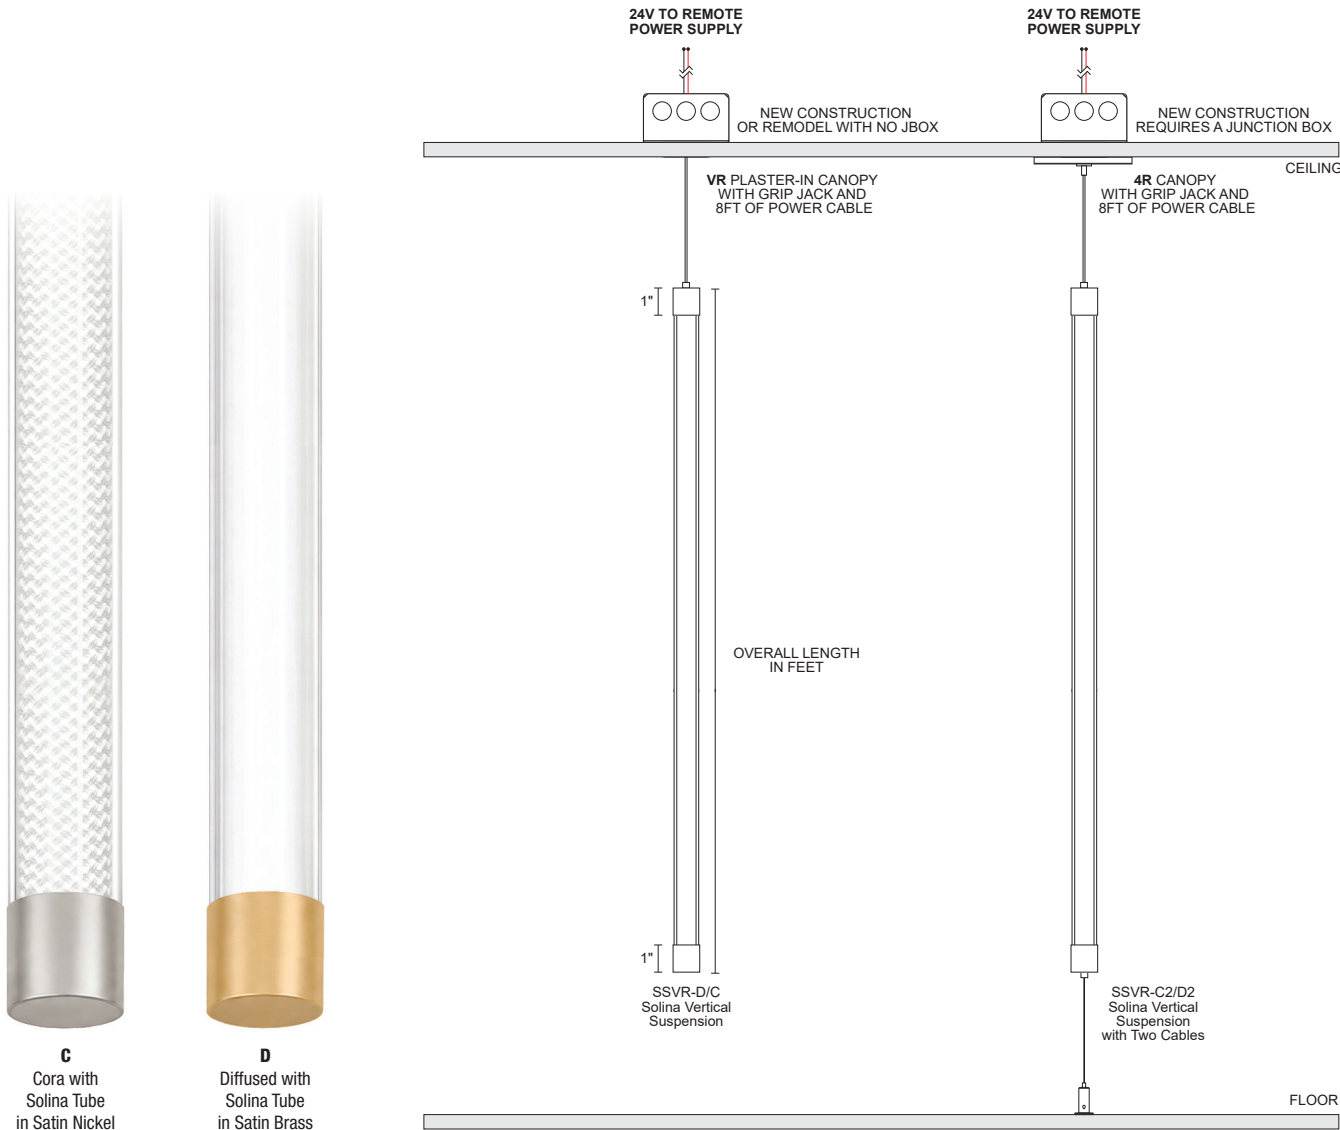




C Cora with Solina Tube in Satin Nickel
D Diffused with Solina Tube in Satin Brass

System	Type	Wattage	Canopy*	Overall Length in Feet*	Color Temperature	Finish*
SSVR	C2	7W	4R	3FT	24K	SN
SSVR Solina Suspension Vertical with 8ft Adjustable Aircraft Cable, 24VDC Remote Power Supply Required	C Cora Weave Lens inside 1.2" Dia Rigid Clear Tubing D Diffused Lens inside 1.2" Dia Rigid Clear Tubing C2 1" Cora Flex 360 inside Solina 1.2" Clear Straight Tube, with Floor Cable Connection D2 1" Diffused Flex 360 inside Solina 1.2" Clear Straight Tube, with Floor Cable Connection	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	2R 2.8" Round Canopy† 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point Millwork Flush-Mount Canopy‡	1-8FT Order in various increments from 1 - 8 feet *Custom lengths available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** * _ L add L after End Cap finish for Trimless Plaster-in Canopy **RAL/ _ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

SOLINA 360 CEILING HORIZONTAL

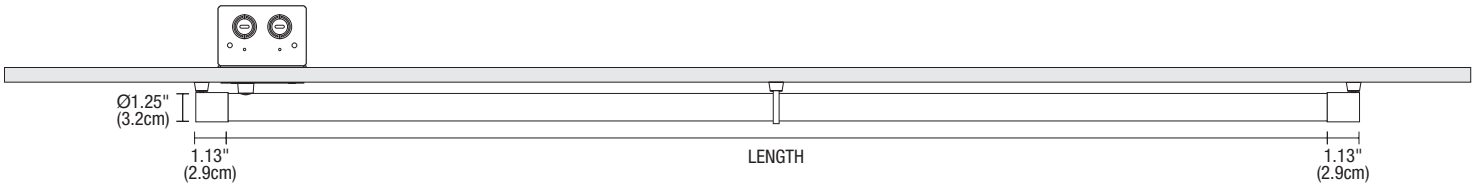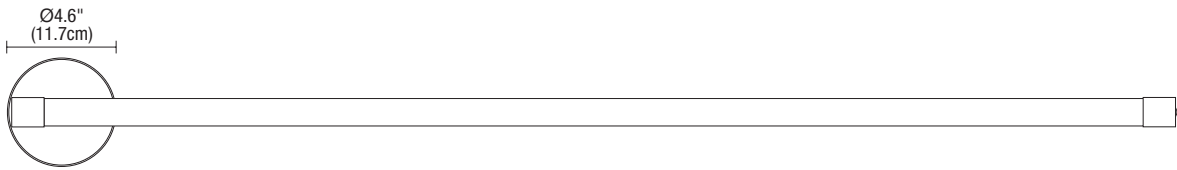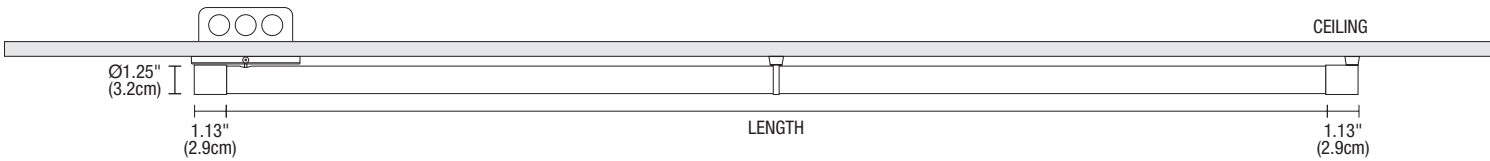


System	Type	Wattage	Canopy*	Nominal Lengths in Feet*	Color Temperature	Finish*
SCR	C	5W	4R	8FT	30K	SBL
SCR Solina 360 Horizontal Ceiling, 24VDC Remote Power Supply Required	C Cora Weave Lens inside 1.2" Dia Rigid Clear Tubing D Diffused Lens inside 1.2" Dia Rigid Clear Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	1R 1" Rectangular Canopy (White finish only) 4R 4.6" Round Canopy *Canopy options shown on page 15	3-40FT Order in 1' increments 3W max length - 30', up to 40' with a power supply at each end 5W max length - 20', up to 40' with a power supply at each end 7W max length - 12', up to 24' with a power supply at each end *Custom lengths available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** *-L add L after End Cap finish for Trimless Plaster-in Canopy **RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 SUSPENSION HORIZONTAL



Support cable included with lengths over 4'

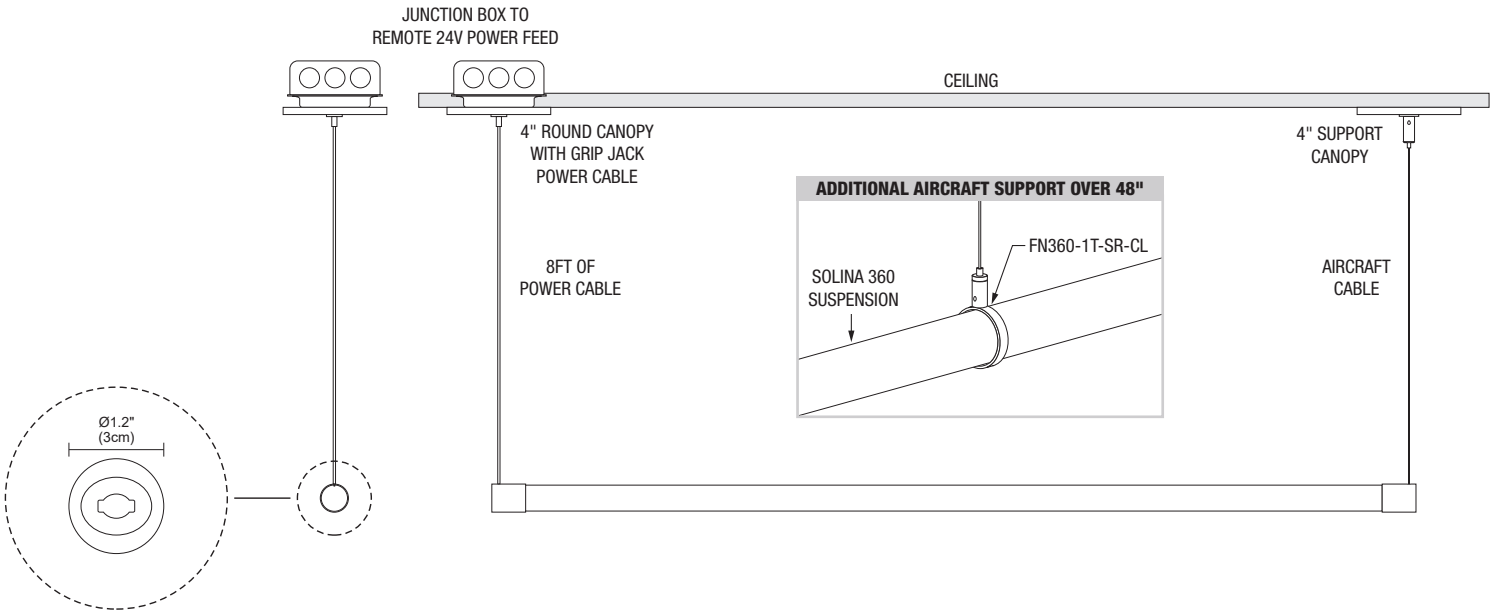


System	Type	Wattage	Canopy*	Nominal Lengths in Feet	Color Temperature	Finish*
SSHR	C	5W	4R	8FT	30K	XXL
SSHR Solina 360 Horizontal Suspension, with 8ft Adjustable Aircraft Cable, 24VDC Remote Power Supply Required	C Cora Weave Lens inside 1.2" Rigid Clear Tubing D Diffused Lens inside 1.2" Rigid Clear Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	2R 2.8" Round Canopy (White finish only) 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point Millwork Flush-Mount Canopy†	3-40FT Order in 1' increments 3W max length - 30', up to 40' with a power supply at each end 5W max length - 20', up to 40' with a power supply at each end 7W max length - 12', up to 24' with a power supply at each end *Custom lengths available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom** * L add L after End Cap finish for Trimless Plaster-in Canopy **RAL/___ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 FAMILY REMOTE


24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26

RING MONOPOINT WITH PENDANT STEM

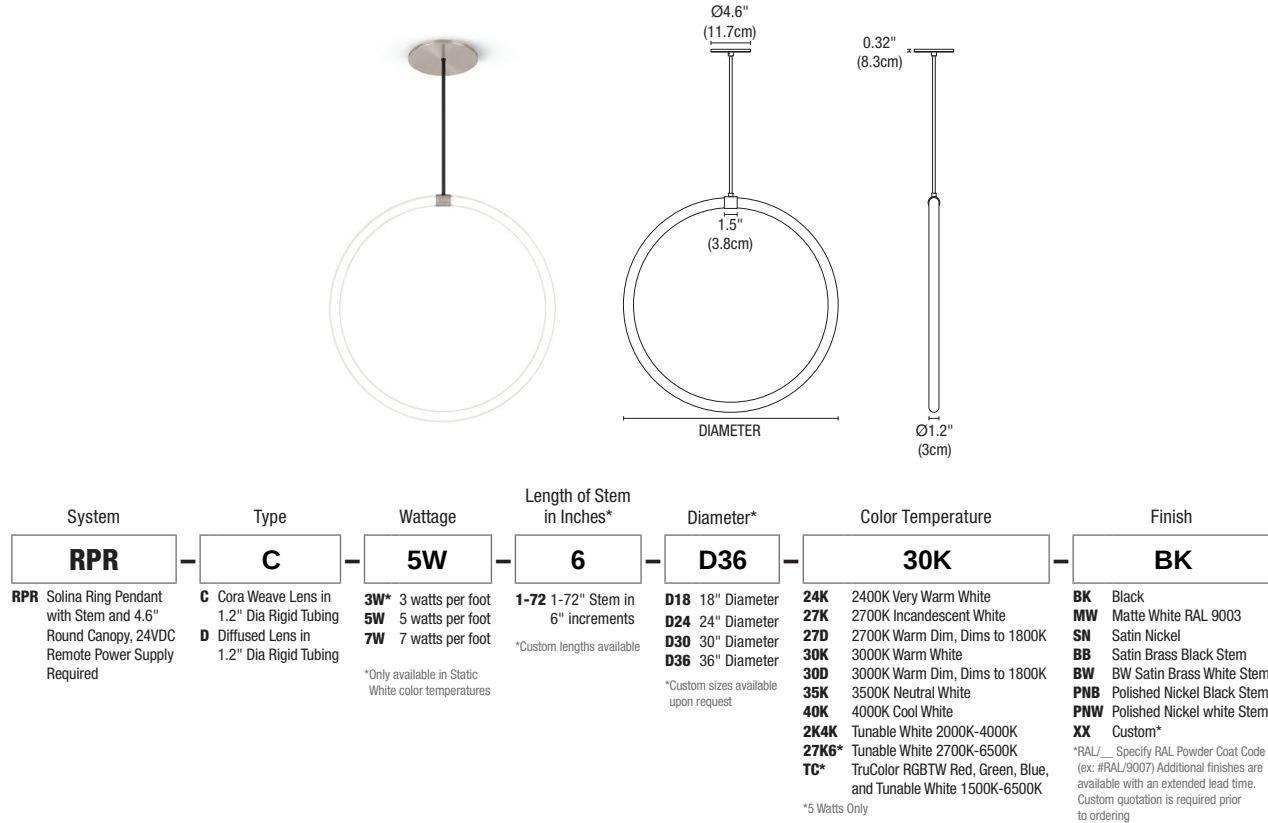

RING FLOATING SUSPENSION

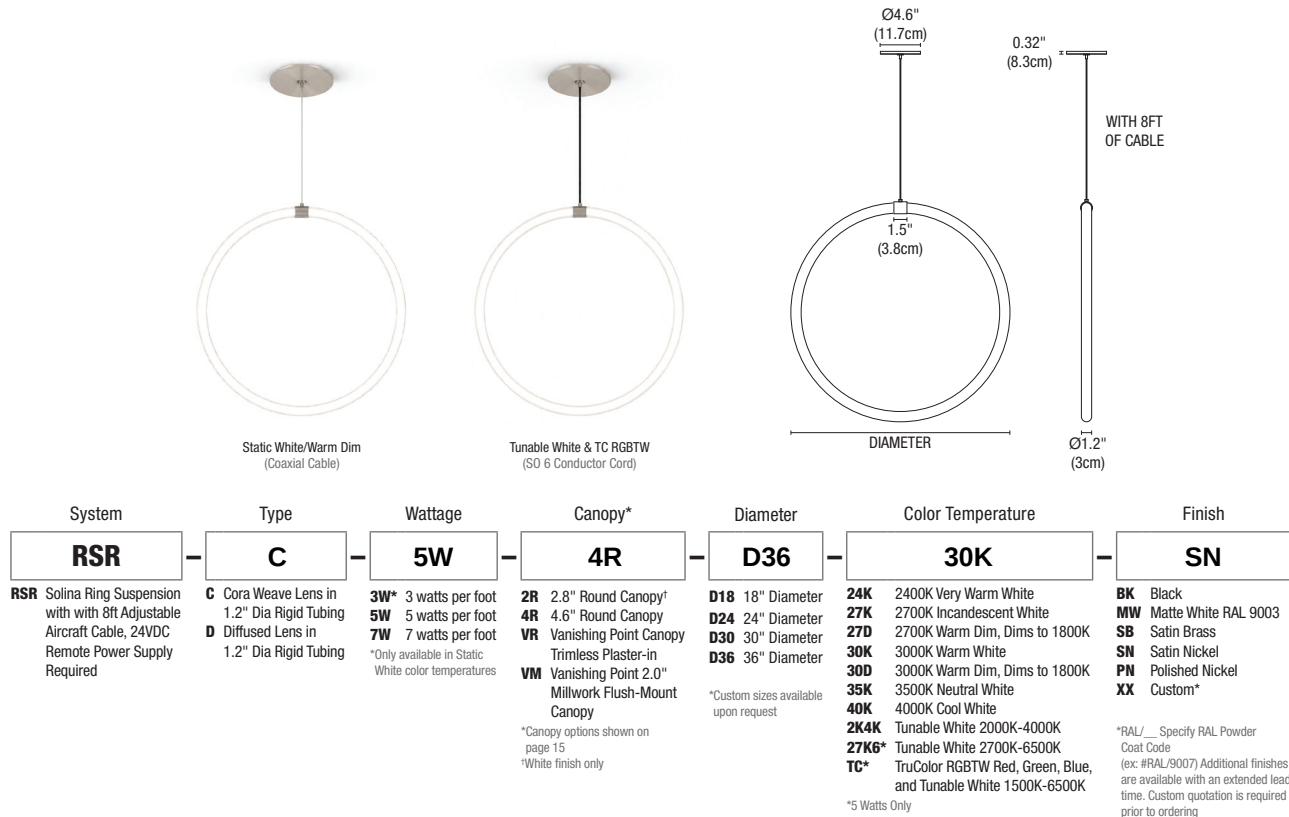


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR


REV 09.08.26

HOOP CEILING FIXTURE

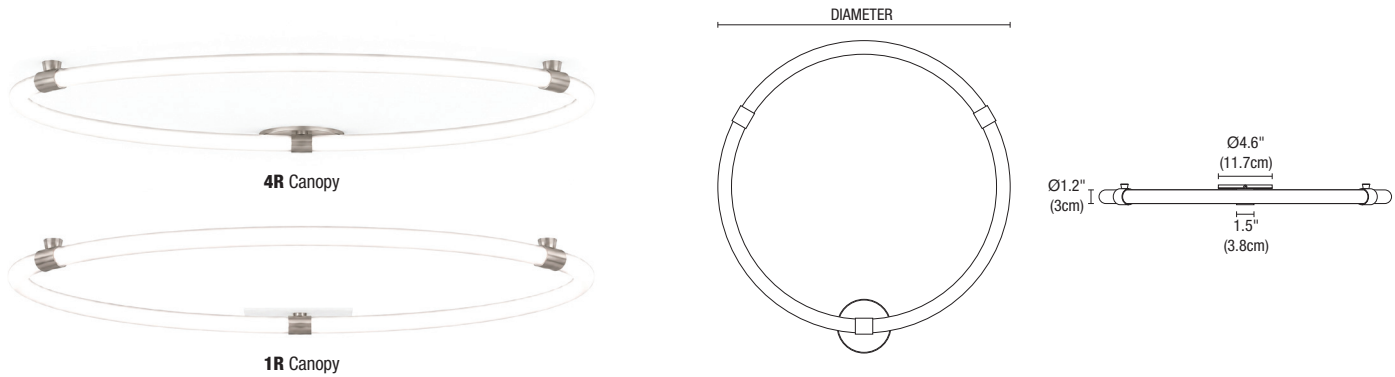

System	Type	Wattage	Canopy*	Diameter*	Color Temperature	Finish
HCR	C	5W	4R	D18	30K	SN
HCR Solina Hoop Ceiling, 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	1R 1" Rectangular Canopy (White finish only) 4R 4.6" Round Canopy *Canopy options shown on page 15	D18 18" Diameter D24 24" Diameter D30 30" Diameter D36 36" Diameter D42 42" Diameter D48 48" Diameter D54 54" Diameter D60 60" Diameter D72 72" Diameter *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

HOOP MONOPOINT SUSPENSION

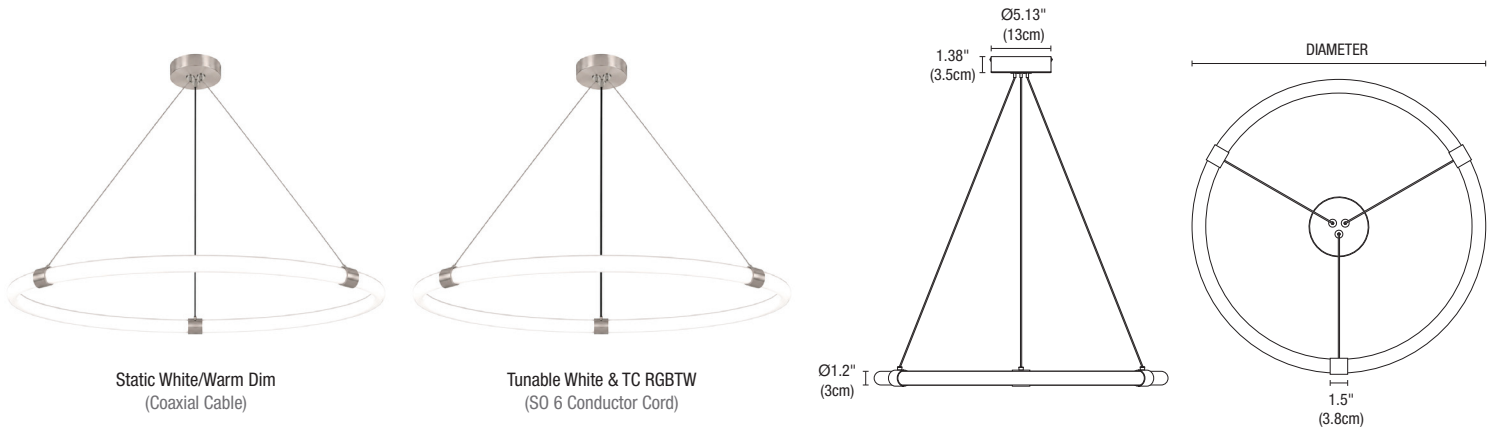


System	Type	Wattage	Diameter*	Color Temperature	Finish
HSR	C	5W	D18	30K	SN
HSR Solina Hoop Suspension with 8ft Adjustable Aircraft Cables and 5" Round Canopy. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	D18 18" Diameter D24 24" Diameter D30 30" Diameter D36 36" Diameter D42 42" Diameter D48 48" Diameter D54 54" Diameter D60 60" Diameter D72 72" Diameter *Custom sizes available upon request **Diameters over 48" require 6 support cables.	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26


HOOP SUSPENSION END FEED

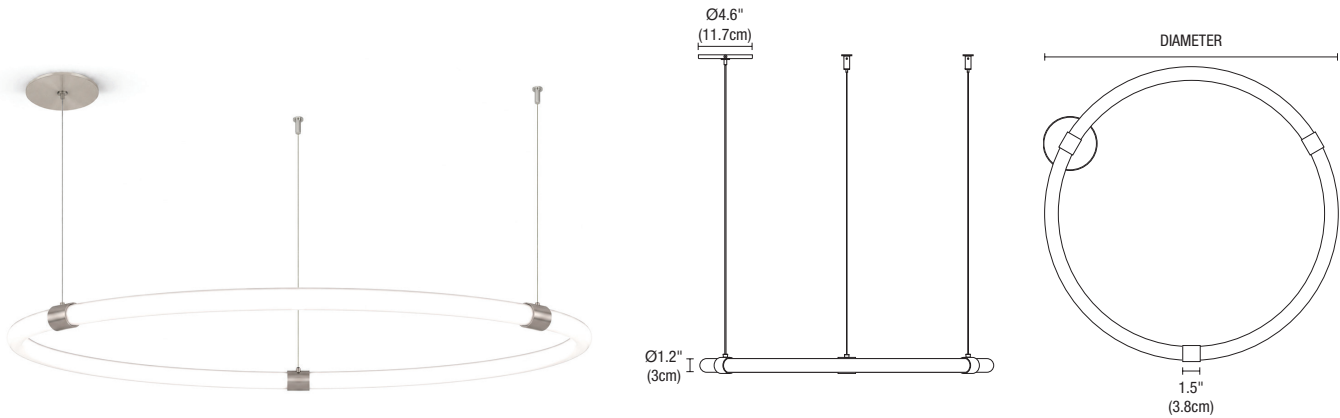

System	Type	Wattage	Canopy*	Diameter*	Color Temperature	Finish
HSER	C	5W	4R	D18	30K	SN
HSER Solina Hoop Suspension End Feed with 8ft Adjustable Aircraft cables. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	2R 2.8" Round Canopy [†] 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point 2.0" Millwork Flush-Mount Canopy [‡] *Canopy options shown on page 15 [†]White finish only [‡]Satin Nickel finish only	D18 18" Diameter D24 24" Diameter D30 30" Diameter D36 36" Diameter D42 42" Diameter D48 48" Diameter D54 54" Diameter D60 60" Diameter D72 72" Diameter *Custom sizes available upon request **Diameters over 48" require 6 support cables	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/... Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SQUARE WITH PENDANT STEM

Square shape with 4" radius rounded corners.

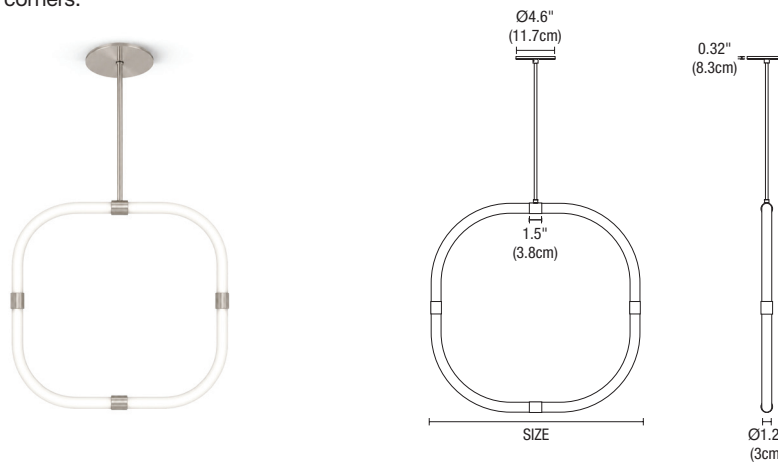

System	Type	Wattage	Length of Stem in Inches	Size*	Color Temperature	Finish
SQPR	C	3W	6	24	30K	SN
SQPR Solina Square Pendant with 4.6" Round Canopy. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	1-72 1-72" in 6" increments	24 24" x 24" Square 30 30" x 30" Square 36 36" x 36" Square 42 42" x 42" Square *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SN Satin Nickel BB Satin Brass Black Stem BW BW Satin Brass White Stem PNB Polished Nickel Black Stem PNW Polished Nickel white Stem XX Custom* *RAL/... Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering




SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26

SQUARE CEILING FIXTURE




Square shape with 4" radius rounded corners.

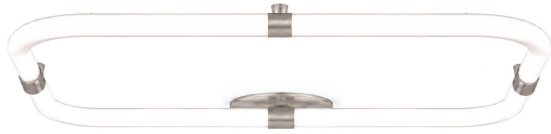

System	Type	Wattage	Canopy*	Size*	Color Temperature	Finish
SQCR	C	5W	4R	24	30K	SN
SQCR Square Ceiling Fixture, 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	1R 1" Rectangular Canopy (White finish only) 4R 4.6" Round Canopy *Canopy options shown on page 15	24 24" x 24" Square 30 30" x 30" Square 36 36" x 36" Square 42 42" x 42" Square 48 48" x 48" Square 54 54" x 54" Square 60 60" x 60" Square *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SQUARE SUSPENSION

Square shape with 4" radius rounded corners.

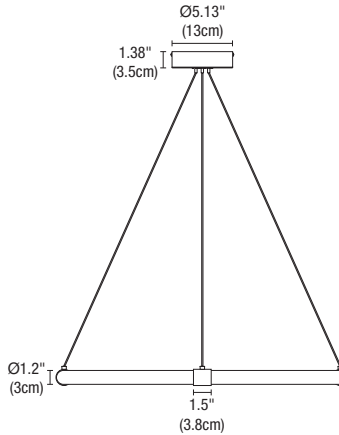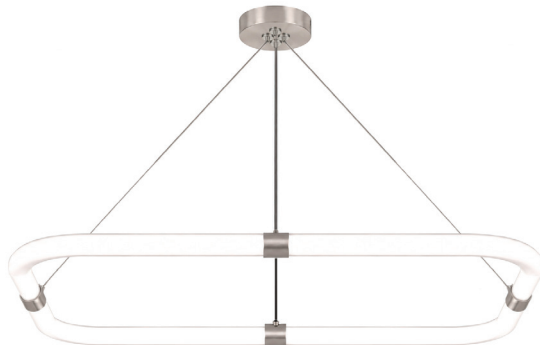

System	Type	Wattage	Size*	Color Temperature	Finish
SQSR	C	5W	24	30K	SN
SQSR Square Horizontal Suspension with 8ft Adjustable Aircraft Cable and 5" Round Canopy. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	24 24" x 24" Square 30 30" x 30" Square 36 36" x 36" Square 42 42" x 42" Square 48 48" x 48" Square 54 54" x 54" Square 60 60" x 60" Square *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26


SQUARE SUSPENSION END FEED

Square shape with 4" radius rounded corners.

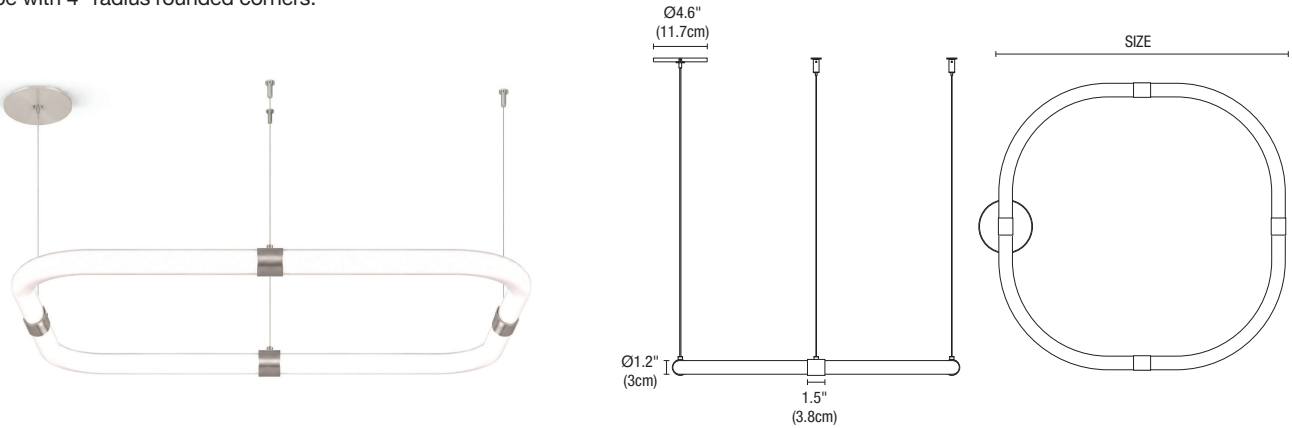

System	Type	Wattage	Canopy*	Size*	Color Temperature	Finish
SQSER	C	5W	4R	18	30K	SN
SQSER Solina Square Suspension End Feed with 8ft Adjustable Aircraft cables. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	2R 2.8" Round Canopy† 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-In VM Vanishing Point 2.0" Millwork Flush-Mount Canopy‡	18 18" x 18" Square 24 24" x 24" Square 30 30" x 30" Square 36 36" x 36" Square 42 42" x 42" Square 48 48" x 48" Square 54 54" x 54" Square 60 60" x 60" Square	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom*
		*Only available in Static White color temperatures	*Canopy options shown on page 15 †White finish only ‡Satin Nickel finish only	*Custom sizes available upon request	*5 Watts Only	*RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

OVAL CEILING FIXTURE

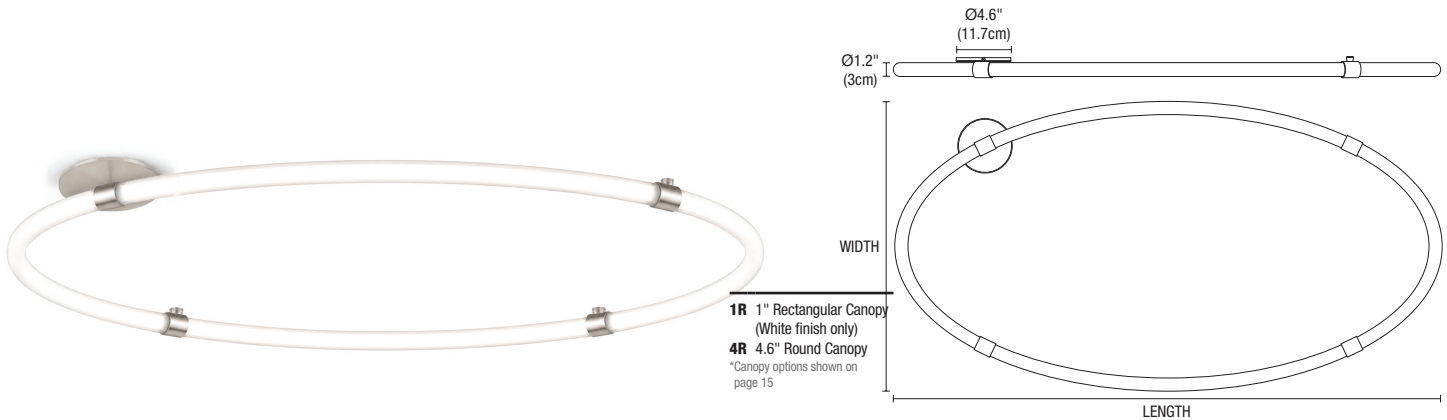


System	Type	Wattage	Canopy*	Width*	Length*	Color Temperature	Finish
OVCR	C	3W	4R	18	36	30K	SN
OVCR Solina Oval Ceiling, 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	1R 1" Rectangular Canopy (White finish only) 4R 4.6" Round Canopy	18 18" Wide Oval 24 24" Wide Oval 30 30" Wide Oval 36 36" Wide Oval	2" increments 36-108 For an 18" wide oval, select a length between 36-108" 48-102 For a 24" wide oval, select a length between 48-102" 60-102 For a 30" wide oval, select a length between 60-102" 72-96 For a 36" wide oval, select a length between 72-96"	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom*
		*Only available in Static White color temperatures	*Canopy options shown on page 15	*Custom sizes available upon request	*Custom sizes available upon request	*5 Watts Only	*RAL/_ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR


REV 09.08.26

OVSR

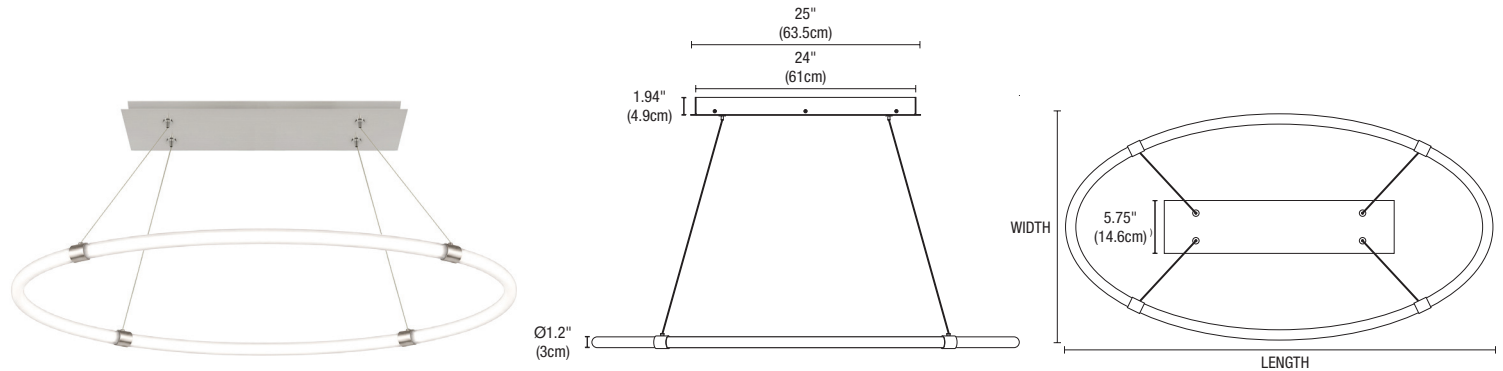

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
OVSR	C	3W	18	36	30K	SN
OVSR Solina Oval Suspension with 8ft Adjustable Aircraft Cable and 26" Rectangular Canopy. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	18 18" Wide Oval 24 24" Wide Oval 30 30" Wide Oval 36 36" Wide Oval *Custom sizes available upon request	2" increments 36-108 For an 18" wide oval, select a length between 36-108" 48-102 For a 24" wide oval, select a length between 48-102" 60-102 For a 30" wide oval, select a length between 60-102" 72-96 For a 36" wide oval, select a length between 72-96" *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black WH Matte White RAL 9010 BW Satin Brass w/ White Canopy SN Satin Nickel PS Polished Nickel w/ Satin Nickel Canopy XX Custom* *RAL/ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

OVSR

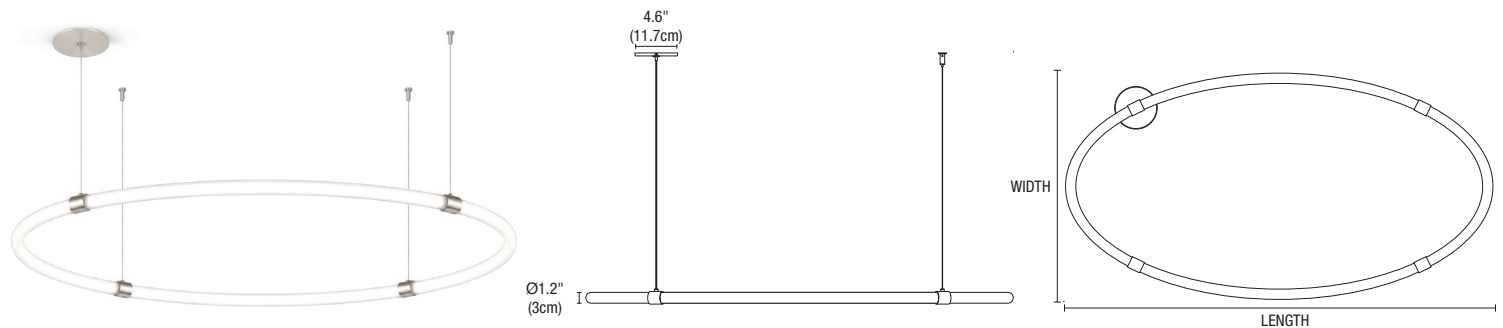

System	Type	Wattage	Canopy*	Width*	Length*	Color Temperature	Finish
OVSR	C	5W	4R	18	36	30K	SN
OVSR Solina Oval Suspension End Feed with 8ft Adjustable Aircraft cables. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	2R 2.8" Round Canopy† 4R 4.6" Round Canopy VR Vanishing Point Canopy Trimless Plaster-in VM Vanishing Point 2.0" Millwork Flush-Mount Canopy‡ *Canopy options shown on page 15 †White finish only ‡Satin Nickel finish only	18 18" wide oval 24 24" wide oval 30 30" wide oval 36 36" wide oval *Custom sizes available upon request	2" increments 36-108 For an 18" wide oval, select a length between 36-108" 48-102 For a 24" wide oval, select a length between 48-102" 60-102 For a 30" wide oval, select a length between 60-102" 72-96 For a 36" wide oval, select a length between 72-96" *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26

RECTANGLE CEILING FIXTURE


Rectangular shape with 4" radius rounded corners.

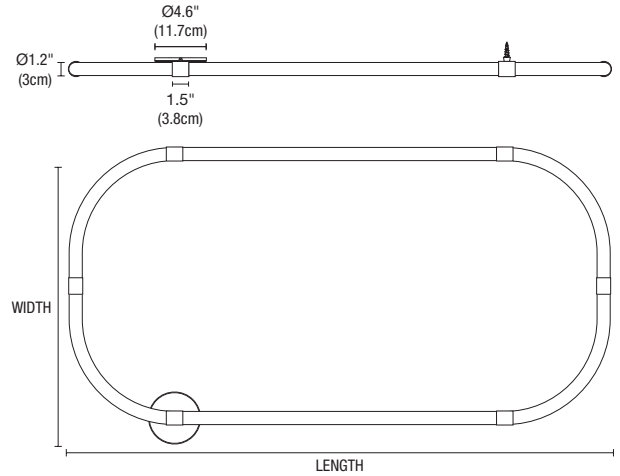

System	Type	Wattage	Canopy*	Width*	Length*	Color Temperature	Finish
RECR	C	3W	4R	24	48	30K	SN
RECR Solina Rectangle Ceiling 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot *Only available in Static White color temperatures	1R 1" Rectangular Canopy (White finish only) 4R 4.6" Round Canopy *Canopy options shown on page 15	24 24" Wide Rectangle 30 30" Wide Rectangle 36 36" Wide Rectangle	2" increments 48-102 For a 24" wide rectangle, select a length between 48-102" 60-102 For a 30" wide rectangle, select a length between 60-102" 72-96 For a 36" wide rectangle, select a length between 72-96" *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/... Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

RECTANGLE SUSPENSION


Rectangular shape with 4" radius rounded corners.

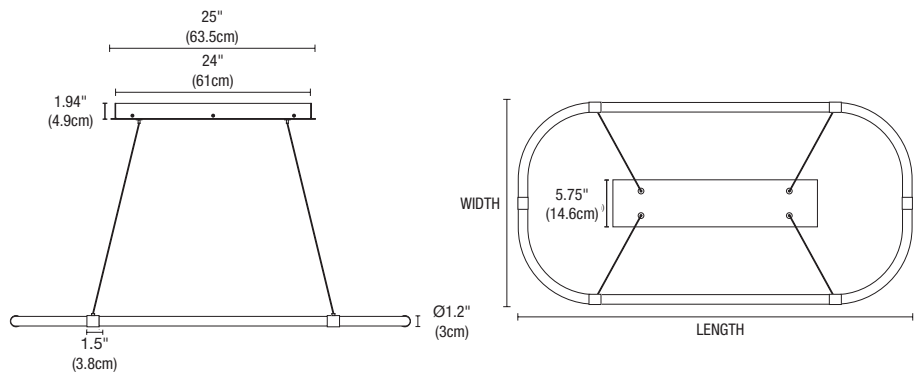

System	Type	Wattage	Width*	Length*	Color Temperature	Finish
RESR	C	3W	24	48	30K	SN
RESR Solina Rectangle Suspension with 8ft Adjustable Aircraft Cable and 26" Rectangular Canopy. 24VDC Remote Power Supply Required.	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	24 24" Wide Rectangle 30 30" Wide Rectangle 36 36" Wide Rectangle	2" increments 48-102 For a 24" wide rectangle, select a length between 48-102" 60-102 For a 30" wide rectangle, select a length between 60-102" 72-96 For a 36" wide rectangle, select a length between 72-96" *Custom sizes available upon request	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K *5 Watts Only	BK Black WH Matte White RAL 9010 BW Satin Brass w/ White Canopy SN Satin Nickel PS Polished Nickel w/ Satin Nickel Canopy XX Custom* *RAL/... Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering

RECTANGLE SUSPENSION END FEED

Rectangular shape with 4" radius rounded corners.

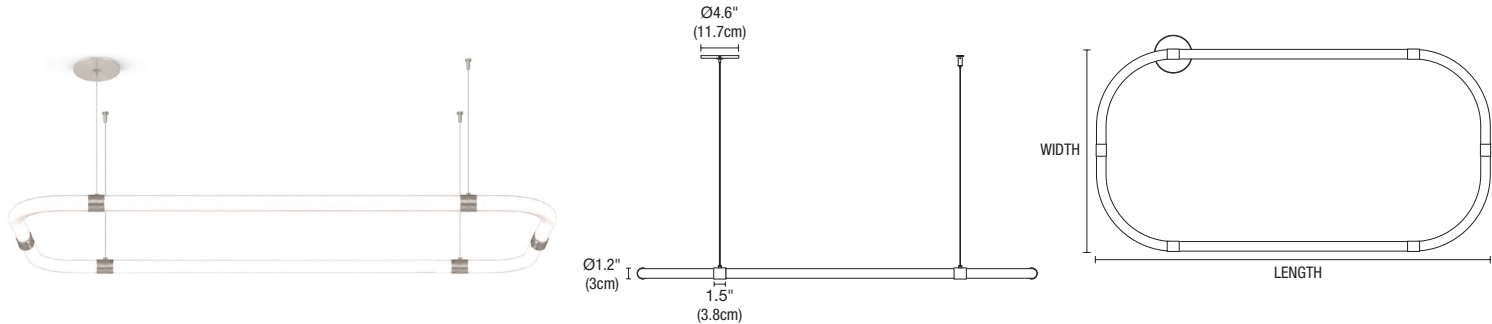



System	Type	Wattage	Width*	Length*	Color Temperature	Finish
RESER	C	3W	24	48	30K	SN
RESER Solina Rectangle Suspension End Feed with 8ft Adjustable Aircraft cables. 24VDC Remote Power Supply Required	C Cora Weave Lens in 1.2" Dia Rigid Tubing D Diffused Lens in 1.2" Dia Rigid Tubing	3W* 3 watts per foot 5W 5 watts per foot 7W 7 watts per foot	24 24" Wide Rectangle 30 30" Wide Rectangle 36 36" Wide Rectangle	2" increments 48-102 For a 24" wide rectangle, select a length between 48-102" 60-102 For a 30" wide rectangle, select a length between 60-102" 72-96 For a 36" wide rectangle, select a length between 72-96"	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim, Dims to 1800K 30K 3000K Warm White 30D 3000K Warm Dim, Dims to 1800K 35K 3500K Neutral White 40K 4000K Cool White 2K4K Tunable White 2000K-4000K 27K6* Tunable White 2700K-6500K TC* TruColor RGBTW Red, Green, Blue, and Tunable White 1500K-6500K	BK Black MW Matte White RAL 9003 SB Satin Brass SN Satin Nickel PN Polished Nickel XX Custom* *RAL/___ Specify RAL Powder Coat Code (ex: #RAL/9007) Additional finishes are available with an extended lead time. Custom quotation is required prior to ordering
			*Custom sizes available upon request	*Custom sizes available upon request	*5 Watts Only	

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26


MONOPOINT CANOPY OPTIONS

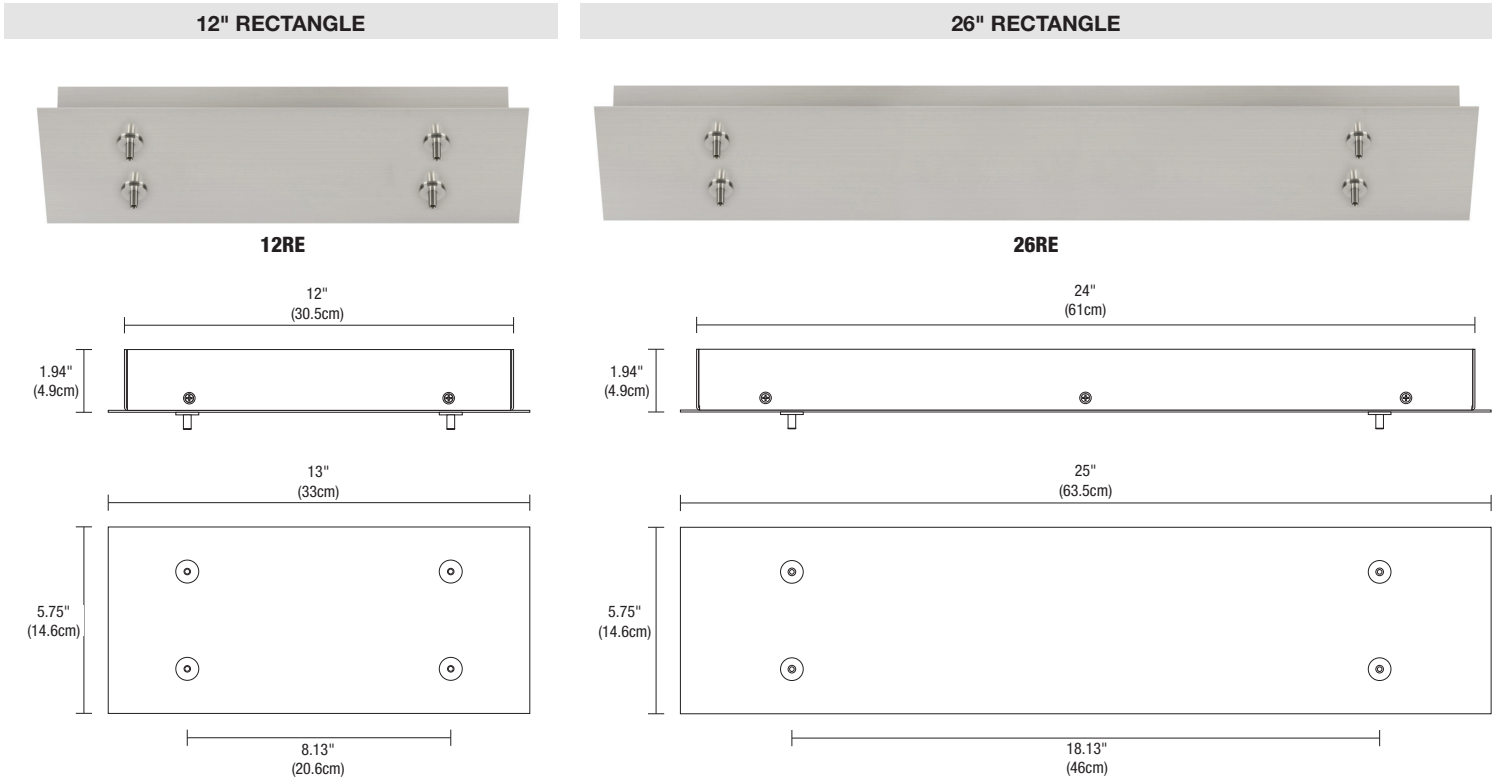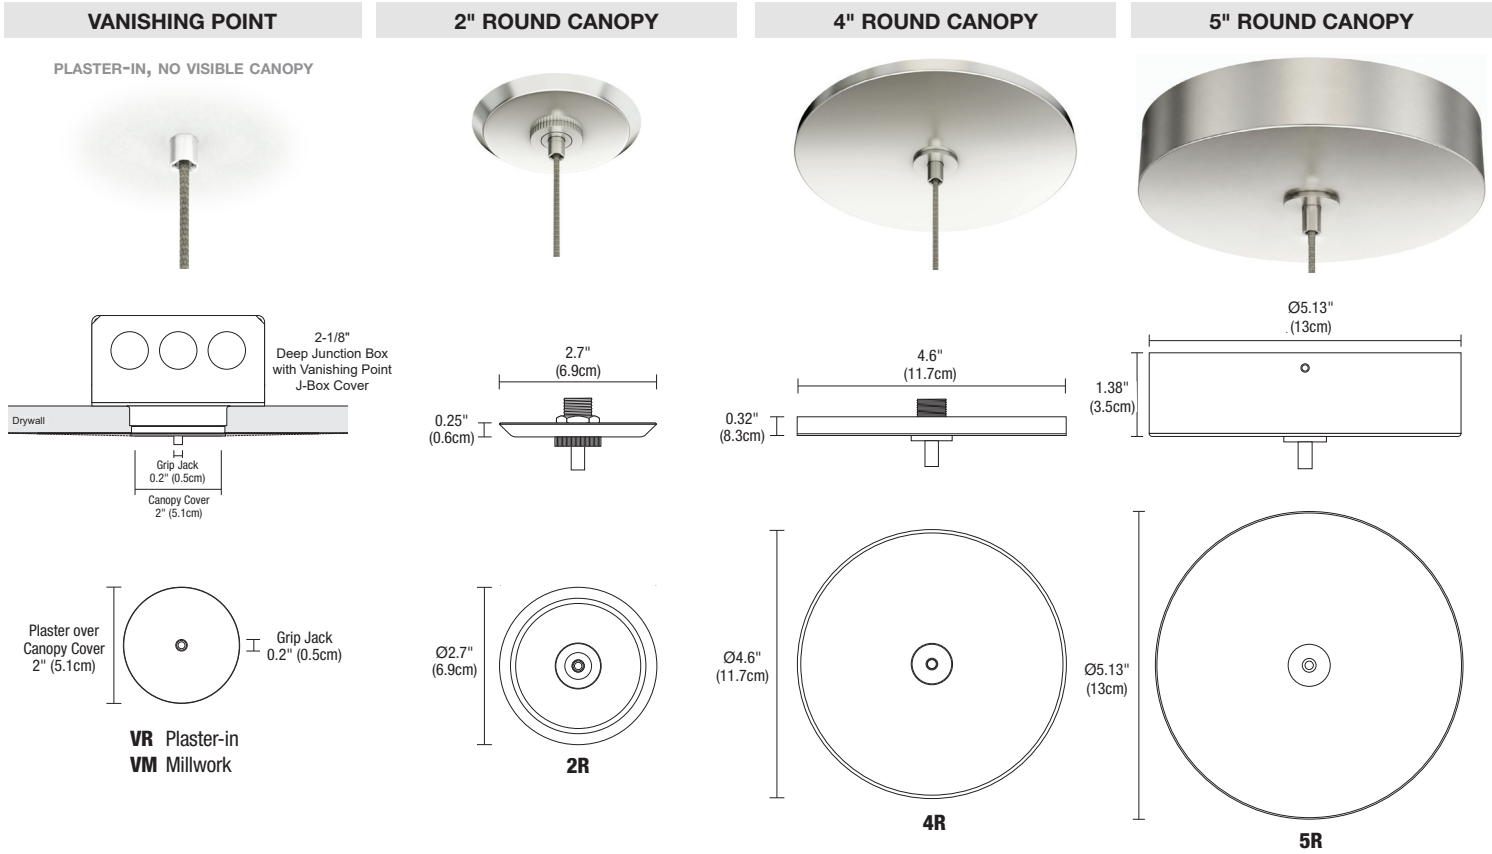

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR


4 Inch Canopy
(Not Included)



CHANNEL SUSPENSION ADJUSTABLE SWAG BAR AND HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the channel suspension when the Power Canopy is not located directly above the fixture. Use when you have two or more canopies (power supplies) on the same fixture run. The Adjustable Swag Hook is compatible with the 2R, and 4R Power Canopies (Canopy not included).


Product	Type	Finish
CS	ADJ-DP-SWAG	SN
CS Channel Suspension	ADJ-SWAG Adjustable Swag Hook for Static White ADJ-DP-SWAG Dual Post Adjustable Swag Hook for 2K4K & RGB	SN Satin Nickel

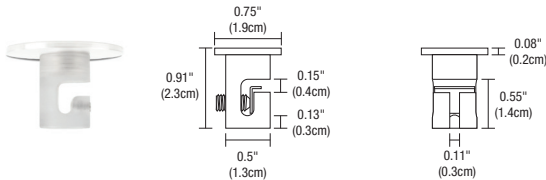

CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from a ceiling or an electrical box that is not located directly above desired fixture location.

System	Type
CS	SWAG
CS Channel Suspension	SWAG Swag Hook

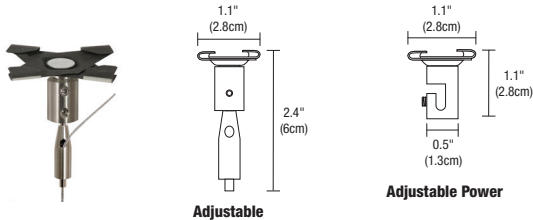

CHANNEL SUSPENSION ADJUSTABLE T-BAR CLIP

Channel Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Available in Satin Black or White with Satin Nickel Hardware as Adjustable Power and Non-Power versions.


Product	Type	Options	Finish
CS	TBAR	A	W
CS Channel Suspension	TBAR 9/16" and 15/16"	A Adjustable AP Adjustable Power	W White BK Satin Black

SOLINA 360 FAMILY REMOTE


24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

STATIC WHITE & WARM DIM


WIRING DIAGRAM: Single Junction Box

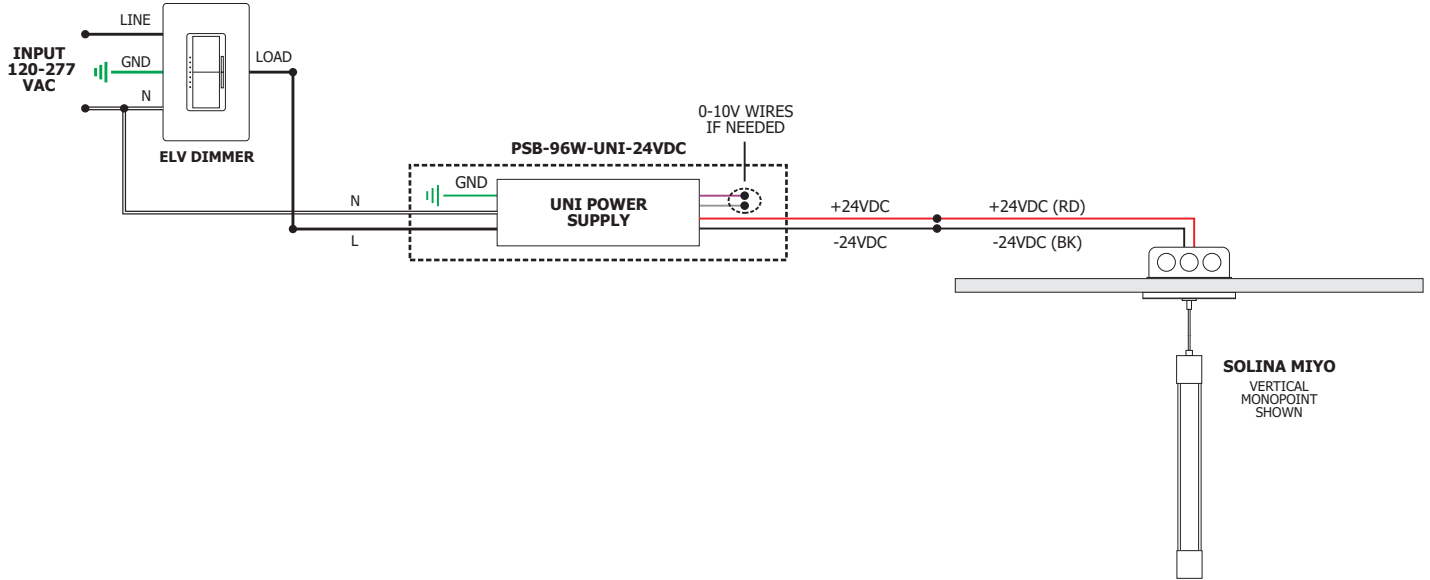

WIRING DIAGRAM: 0-10V

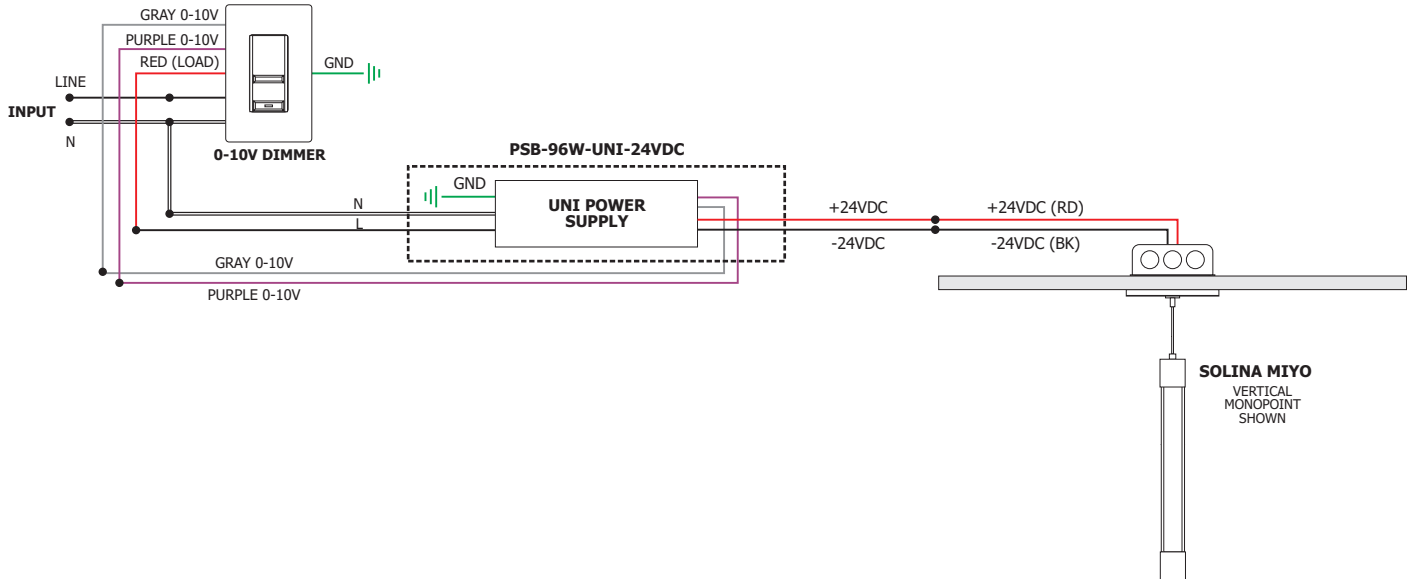

WIRING DIAGRAM: 2-IN-1 WALL DIMMER & POWER SUPPLY

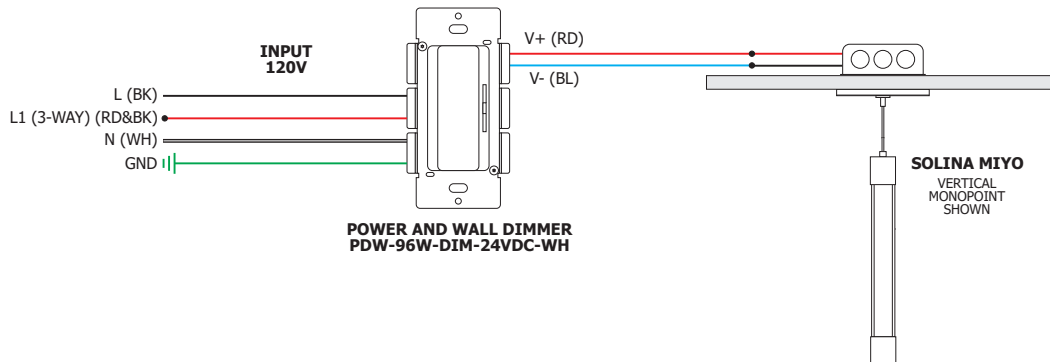


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

STATIC WHITE & WARM DIM

WIRING DIAGRAM: Pure Smart

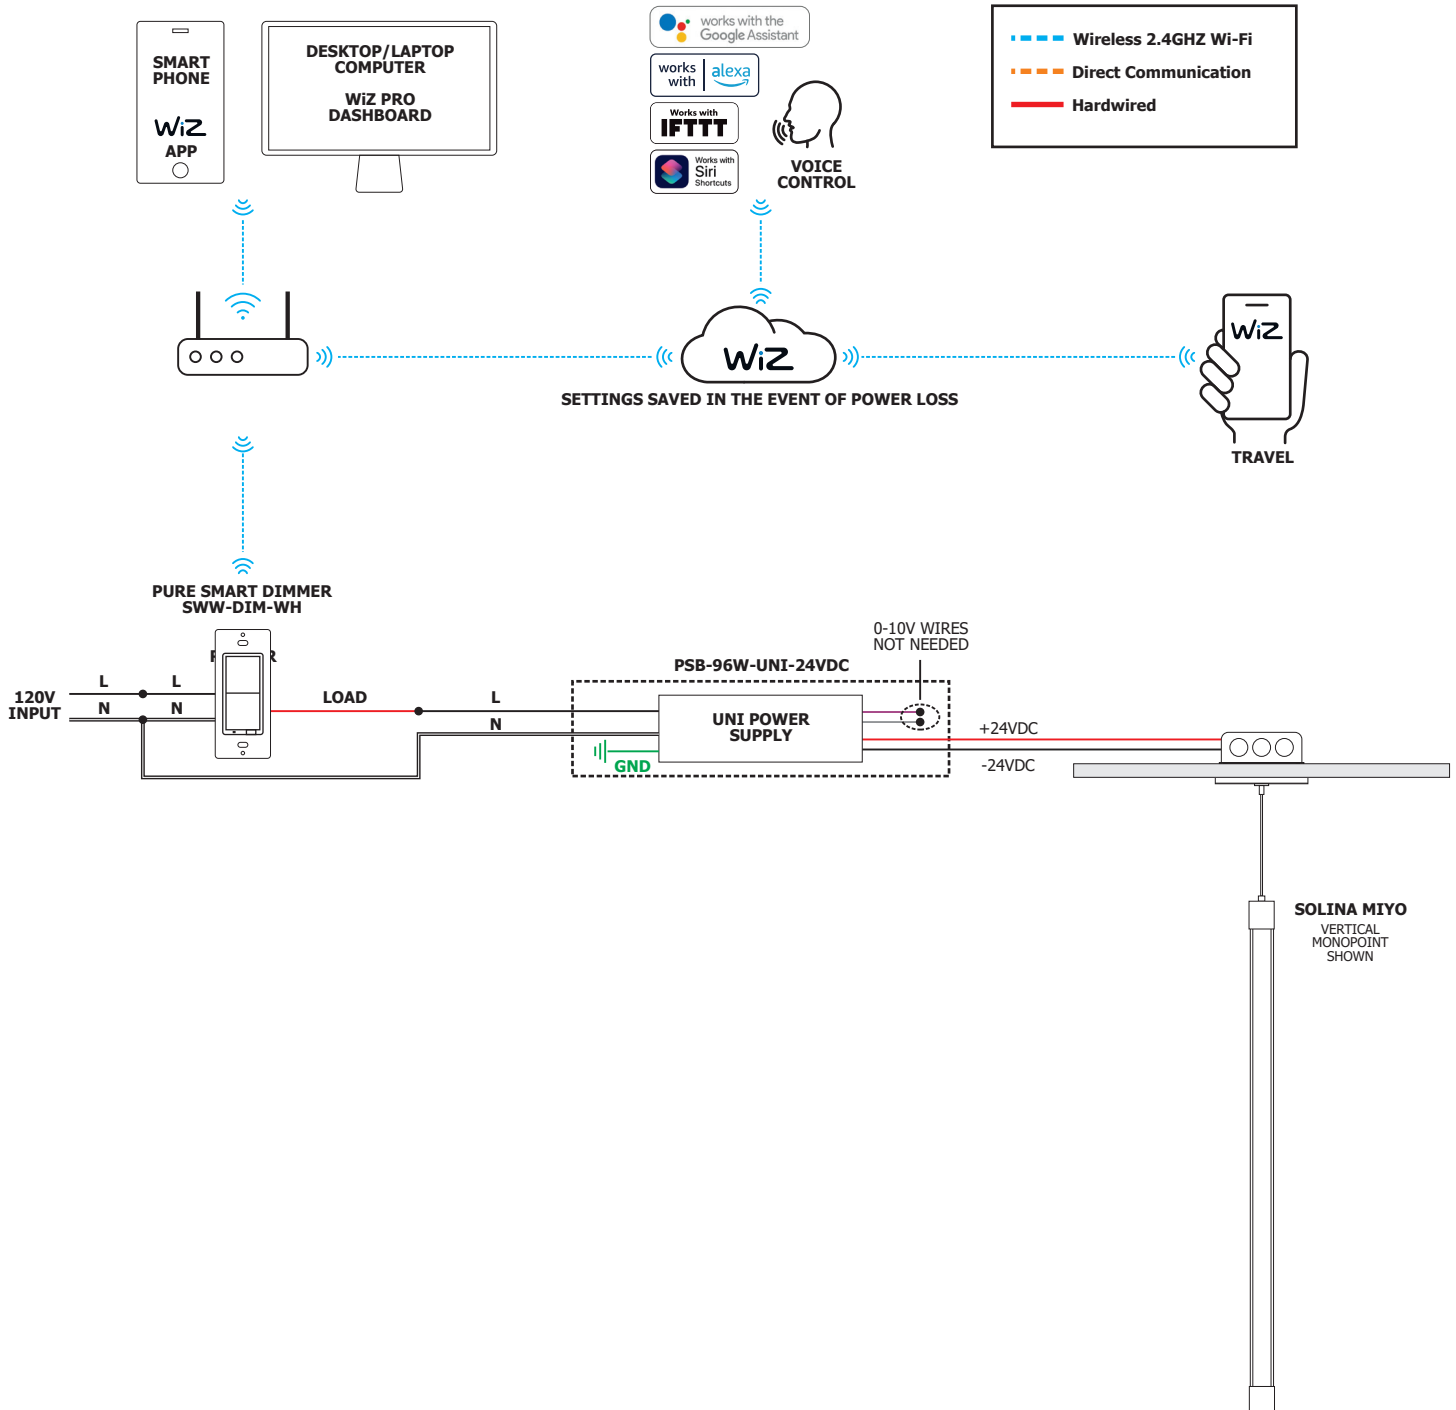


SOLINA 360 FAMILY REMOTE


24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

TUNABLE WHITE

WIRING DIAGRAM: DMX Dimming

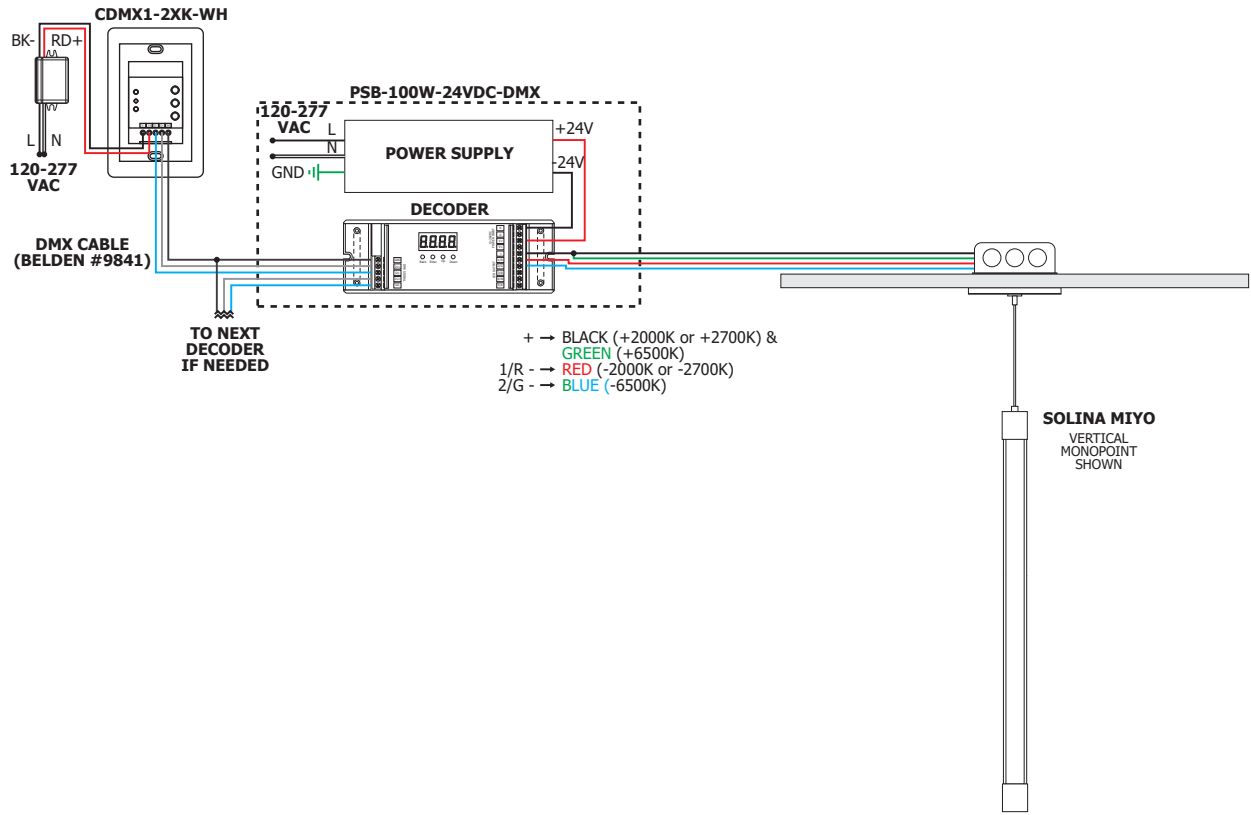

WIRING DIAGRAM: 0-10V

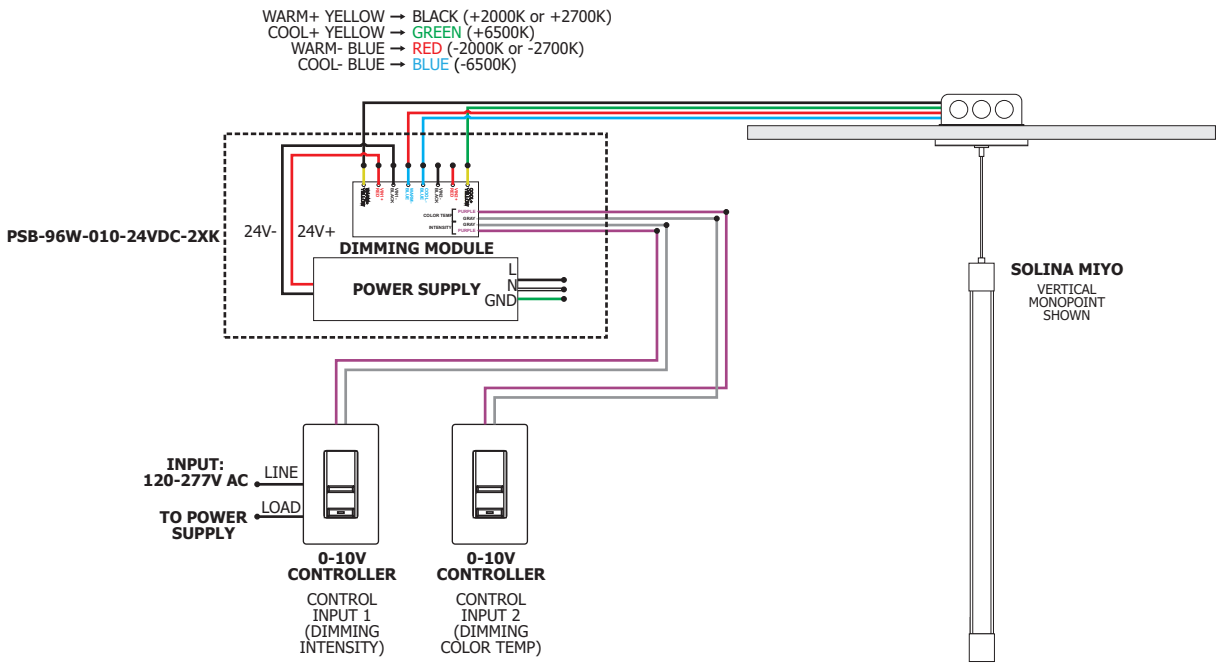


SOLINA 360 FAMILY REMOTE


24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

TUNABLE WHITE

WIRING DIAGRAM: Pure Smart Connected by WiZ

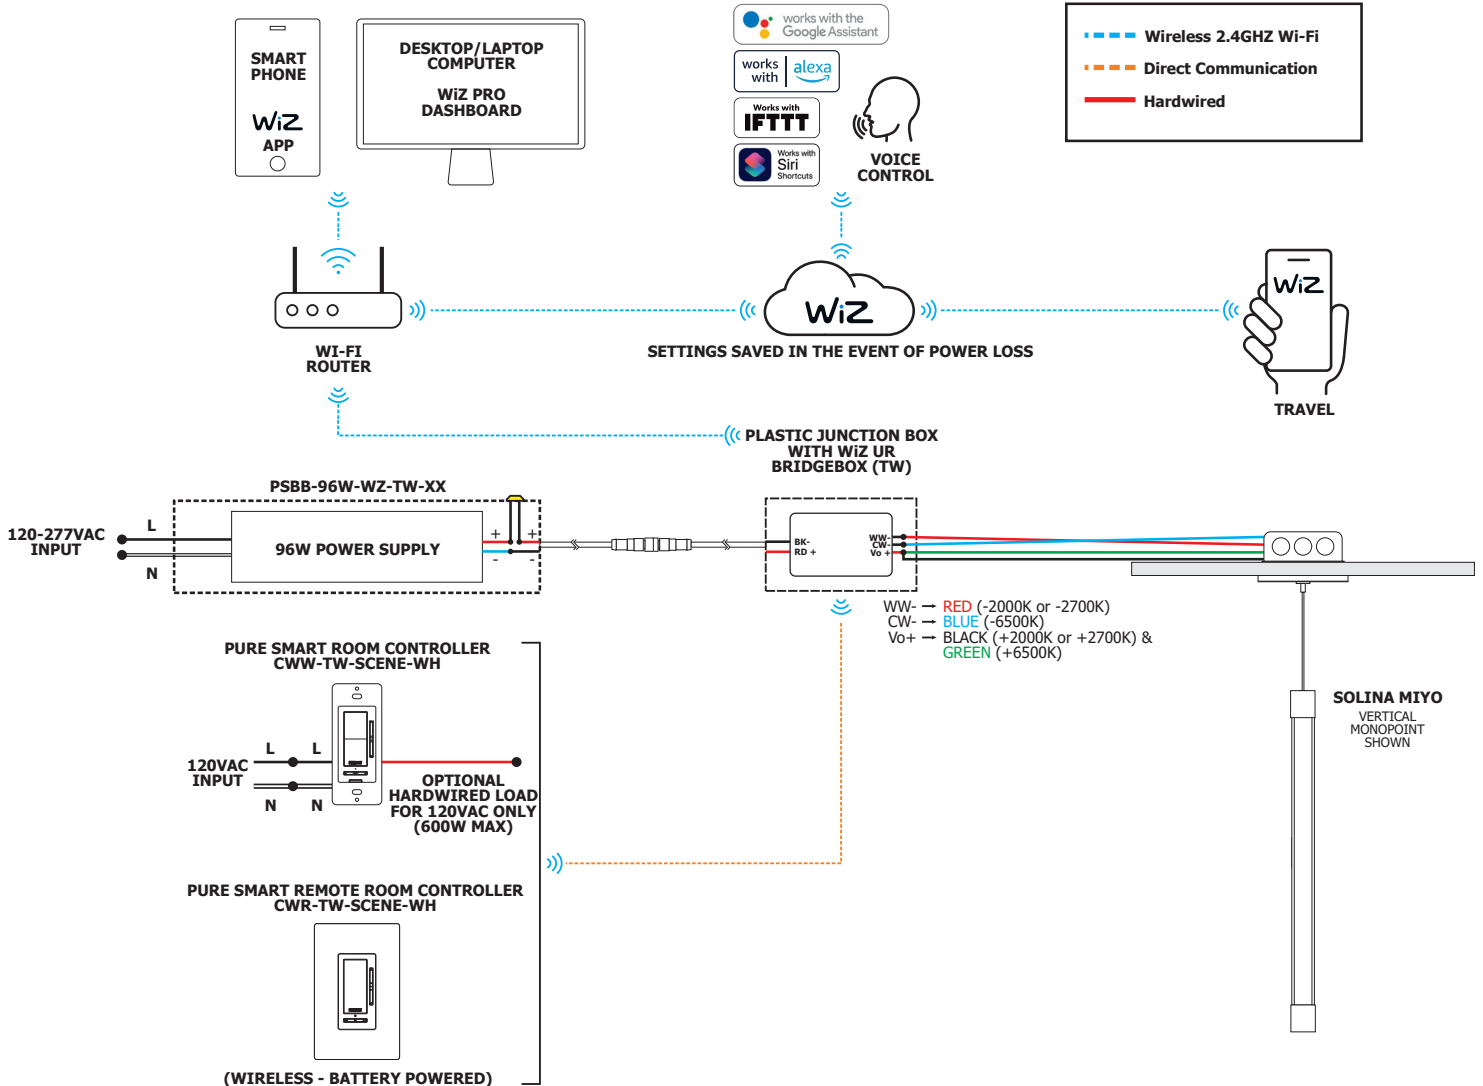

WIRING DIAGRAM: DALI

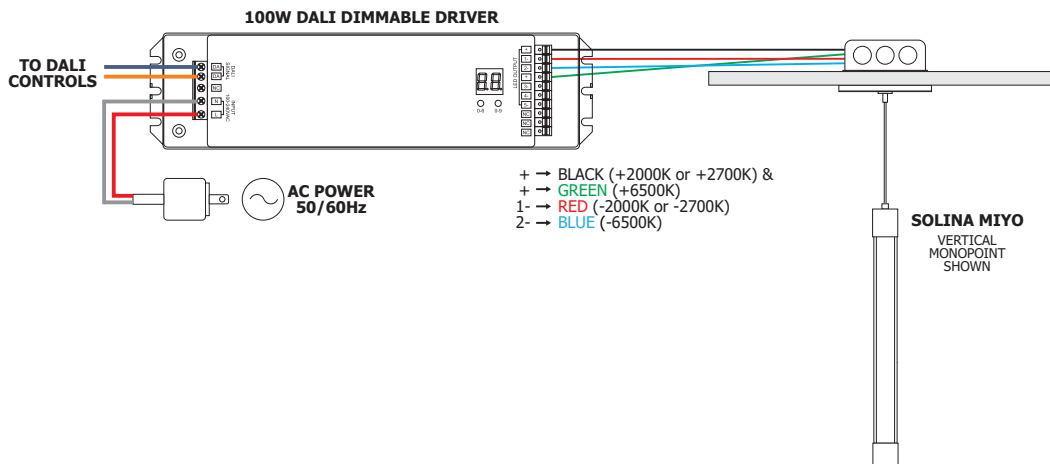


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

TRUCOLOR RGBTW

WIRING DIAGRAM: Pure Smart Connected by WiZ

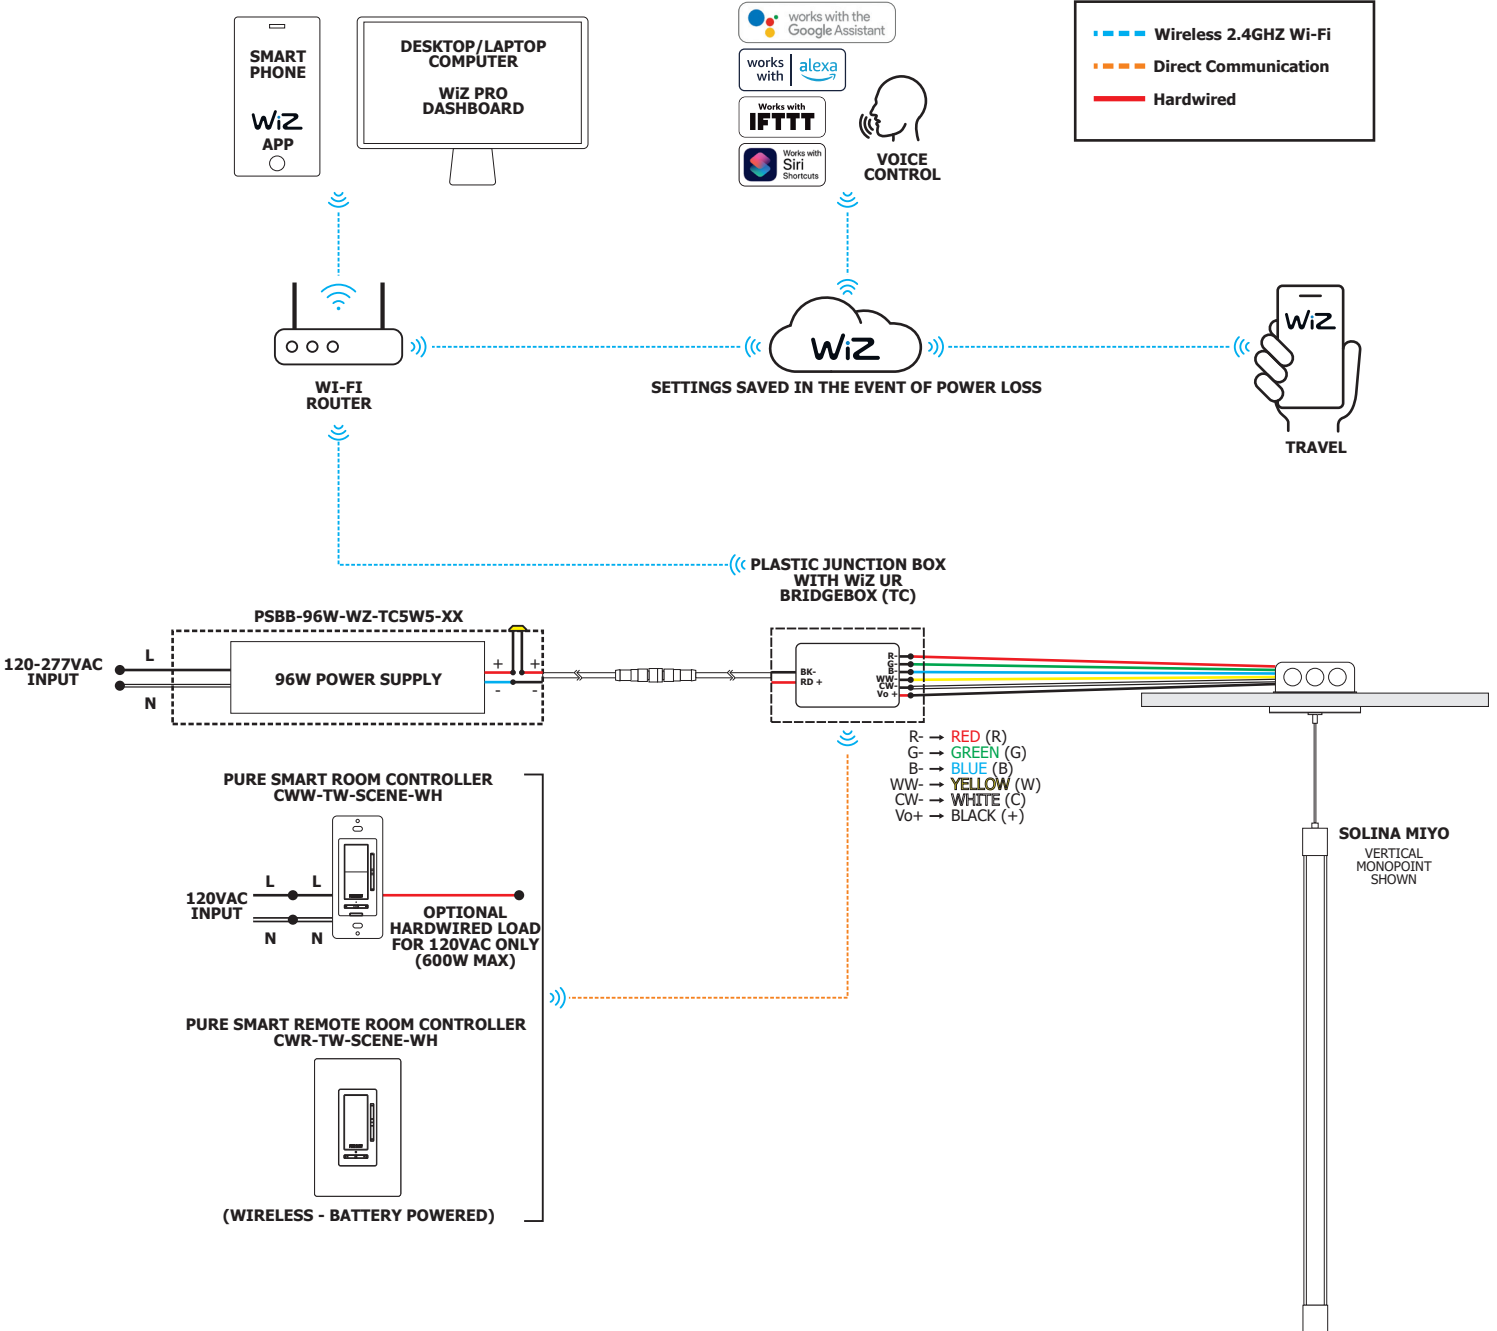


SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

TRUCOLOR RGBTW

WIRING DIAGRAM: Pure Smart Integration

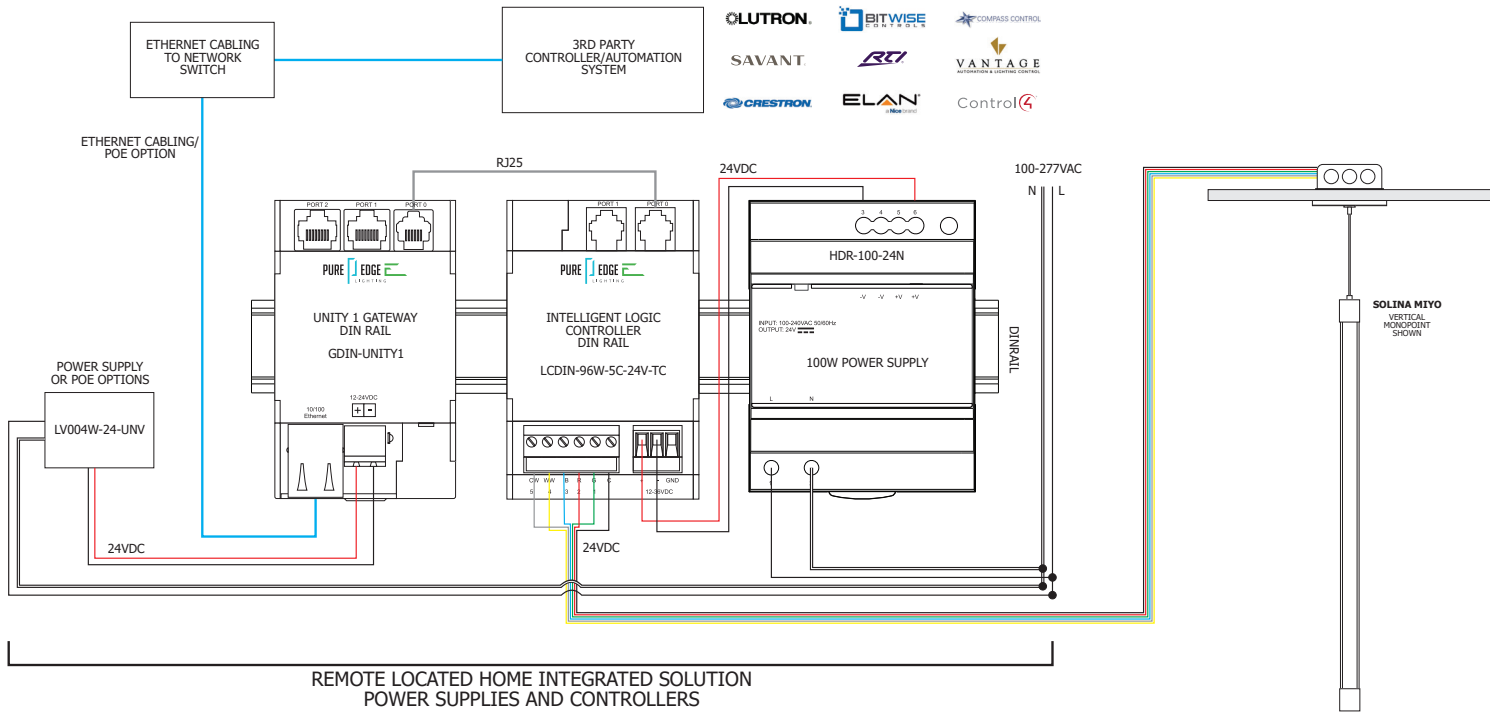

SOLINA 360 FAMILY REMOTE

24VDC, STATIC WHITE, WARM DIM, TUNABLE WHITE, & TRUCOLOR

REV 09.08.26

NOMINAL DELIVERED LUMENS

	1C CORA WEAVE FLEX - STATIC WHITE & WARM DIM																		
WATTS PER FOOT	3W					5W								7W					
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	402	418	423	422	512	642	661	355	680	375	652	822	924	967	502	978	543	943	1183
LUMENS PER WATT (lm/w)	112	117	121	120	145	112	117	63	121	65	120	151	111	121	60	120	66	117	146
CRI	95	94	93	93	93	95	94	95	93	96	93	93	96	94	96	93	95	93	93

	1D DIFFUSED FLEX - STATIC WHITE & WARM DIM																		
WATTS PER FOOT	3W					5W								7W					
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D	30K	30D	35K	40K	24K	27K	27D	30K	30D	35K	40K
LUMENS PER FOOT (lm/ft)	459	476	482	481	584	732	754	405	775	428	743	937	1054	1103	572	1114	619	1074	1349
LUMENS PER WATT (lm/w)	128	133	138	137	166	128	133	71	138	74	137	172	126	138	69	137	75	133	167
CRI	95	96	93	93	93	95	94	95	93	96	93	93	96	94	96	93	95	93	93

	1C CORA WEAVE FLEX - 2K4K TUNABLE WHITE													
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	258	334	334	337	351	403	393	415	549	549	554	578	663	629
LUMENS PER WATT (lm/w)	55	69	67	66	67	77	76	59	76	74	73	74	86	82
CRI	93	93	93	96	96	93	93	93	93	93	96	96	93	93

	1D DIFFUSED FLEX - 2K4K TUNABLE WHITE													
WATTS PER FOOT	5W							7W						
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	20K	22K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	294	380	380	384	400	459	448	473	625	625	632	658	755	717
LUMENS PER WATT (lm/w)	62	78	76	75	76	88	86	67	87	85	83	85	98	94
CRI	93	93	93	96	96	93	93	93	93	93	96	96	93	93

	1C CORA WEAVE FLEX - 27K6 TUNABLE WHITE							
WATTS PER FOOT	5W							
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	
LUMENS PER FOOT (lm/ft)	214	254	261	268	293	315	300	
LUMENS PER WATT (lm/w)	54	51	52	54	59	63	75	
CRI	94+	93+	92+	92+	92+	92+	91+	

	1D DIFFUSED FLEX - 27K6 TUNABLE WHITE							
WATTS PER FOOT	5W							
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	
LUMENS PER FOOT (lm/ft)	244	290	298	306	334	359	342	
LUMENS PER WATT (lm/w)	49	46	48	49	53	58	68	
CRI	94+	93+	92+	92+	92+	92+	91+	

	1C CORA WEAVE FLEX - TRUCOLOR RGBTW								
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	98	111	115	122	127	136	139	111	104
LUMENS PER WATT (lm/w)	19	22	24	28	30	30	29	28	35
CRI	92	94	95	95	96	97	97	92	90

	1D DIFFUSED FLEX - TRUCOLOR RGBTW								
WATTS PER FOOT	5W								
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (lm/ft)	101	114	118	125	239	140	143	114	107
LUMENS PER WATT (lm/w)	48	54	56	30	58	34	68	54	51
CRI	93	93	93	96	96	96	94	94	94

LED STRIP TM30 DATA


5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

REV 09.08.26

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%


LED STRIP TM30 DATA

5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2700D | Rf: 90.7 | Rg: 101.1

Color Vector Graphic

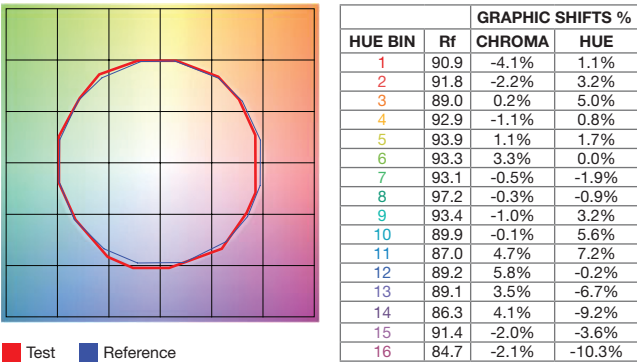

3000D | Rf: 90.6 | Rg: 101.1

Color Vector Graphic

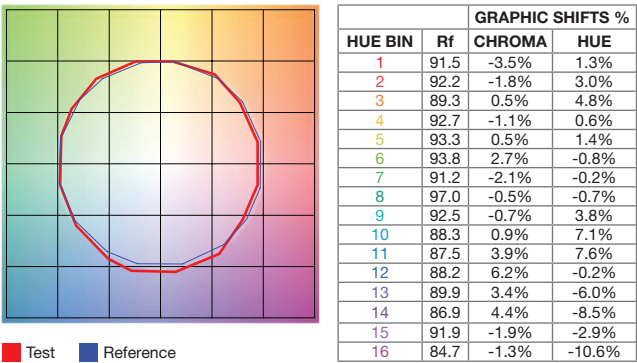

LED STRIP TM30 DATA


5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

REV 09.08.26

TM-30-15 DATA: The data below is for LS5 bare Lazer Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K4K) | Rf: 84.3 | Rg: 96.9

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%

3000K (2K4K) | Rf: 90.2 | Rg: 101.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%

4000K ONLY (2K4K) | Rf: 89.6 | Rg: 99.1

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%

LED STRIP TM30 DATA


5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

REV 09.08.26

TM-30-15 DATA: The data below is for Tunable White bare LED Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K6K/27K6) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	87.7	-5.5%	1.2%
2	88.7	-3.9%	4.2%
3	90.5	-1.5%	4.3%
4	95.0	-1.7%	0.8%
5	95.2	-0.2%	2.1%
6	94.2	1.6%	1.9%
7	95.9	-0.8%	-2.2%
8	95.5	-1.7%	1.3%
9	93.8	-1.4	2.6%
10	91.9	-0.7%	4.2%
11	91.3	3.6%	3.7%
12	91.2	4.2%	-1.0%
13	86.6	3.8%	-12.7%
14	67.2	-3.0%	-16.3%
15	84.9	-3.3%	-9.4%
16	84.2	-5.7%	-7.5%

3000K (2K6K/27K6) | Rf: 90.5 | Rg: 100.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.2%
2	92.4	-1.8%	2.7%
3	89.8	0.3%	4.5%
4	92.4	-1.7%	0.4%
5	93.3	-0.1%	1.4%
6	94.5	2.1%	-0.6%
7	91.0	-2.5%	0.3%
8	96.9	-0.8%	-0.2%
9	91.6	-0.9%	4.6%
10	86.7	0.7%	7.8%
11	86.3	3.8%	8.5%
12	88.3	6.1%	0.6%
13	90.9	3.1%	-5.2%
14	87.3	4.7%	-7.9%
15	92.1	-1.9%	-2.5%
16	84.5	-0.9%	-10.9%

4000K ONLY (2K6K/27K6) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.5	-5.5%	1.3%
2	90.4	-3.0%	2.3%
3	89.8	-2.1%	3.6%
4	89.1	-3.4%	0.4%
5	88.5	-5.9%	0.1%
6	93.6	-3.0%	-0.4%
7	88.9	-6.2%	1.7%
8	87.3	-5.0%	4.9%
9	82.4	-3.6%	11.3%
10	77.4	-1.8%	12.7%
11	79.8	4.9%	11.4%
12	88.7	4.4%	2.7%
13	88.7	4.0%	-5.1%
14	91.2	2.2%	-3.8%
15	82.7	-0.1%	-9.2%
16	82.8	-2.2%	-7.6%

LED STRIP TM30 DATA


5W | 7W STATIC WHITE, WARM DIM, TUNABLE WHITE, RGBTW

REV 09.08.26

TM-30-15 DATA: The data below is for TruColor™ RGBTW (S5W7) bare LED Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2000K (TruColor™ RGBTW)

View Angle:2 Deg

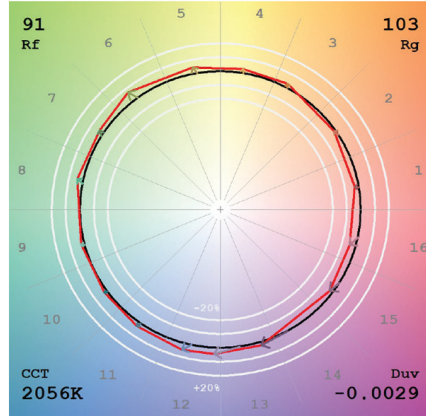


2200K (TruColor™ RGBTW)

View Angle:2 Deg

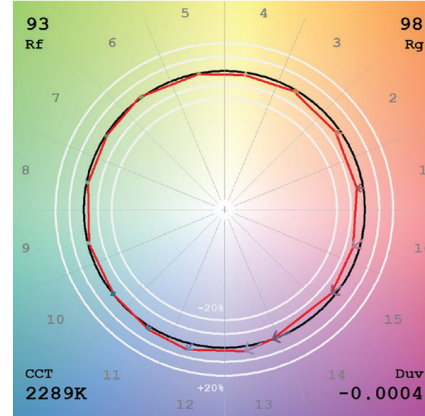


2400K (TruColor™ RGBTW)

View Angle:2 Deg

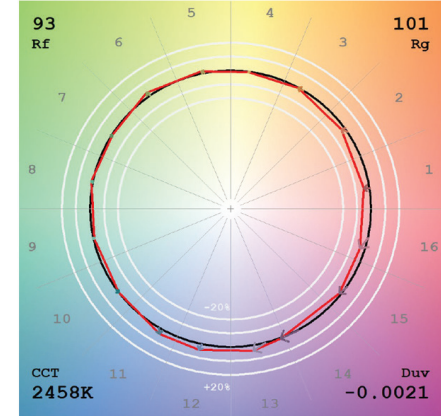


2700K (TruColor™ RGBTW)

View Angle:2 Deg

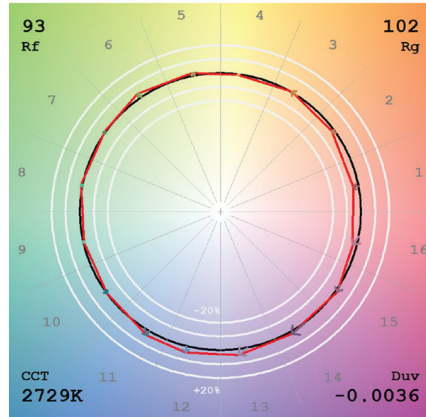


3000K (TruColor™ RGBTW)

View Angle:2 Deg

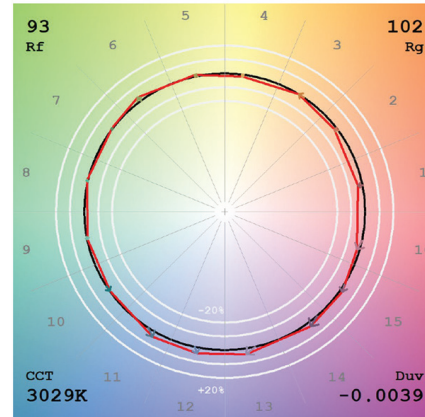


3500K (TruColor™ RGBTW)

View Angle:2 Deg

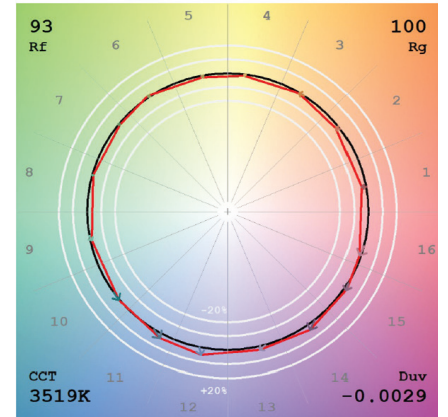


4000K (TruColor™ RGBTW)

View Angle:2 Deg

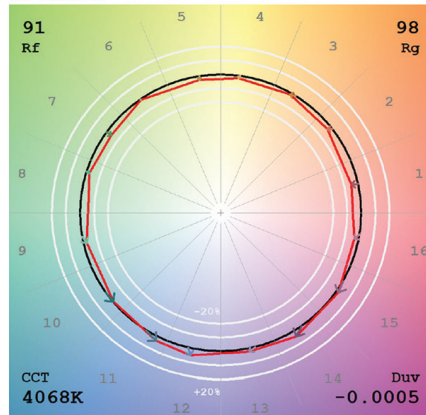

5700K (TruColor™ RGBTW)

View Angle:2 Deg

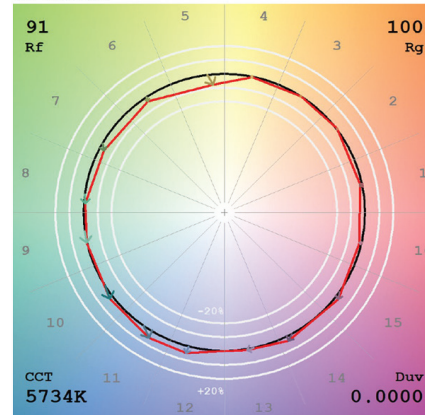

6500K (TruColor™ RGBTW)

View Angle:2 Deg

